


Arrento Core 800x800x20

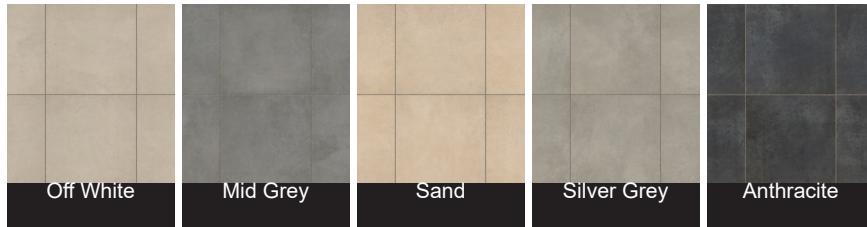

Available in a variety of sizes, Arrento® Core porcelain paving is cut to a precise size during production so all tiles are identical, giving you perfect clean lines for a modern aesthetic. The Porcelain Collection from Marshalls is very practical, easy to clean and is slip resistant, even in wet conditions.

DESCRIPTION

| | |
|-----------------------------------|--|
| Manufacturing Process | Pressed, glazed, digital printed, kiln fired and rectified porcelain tiles |
| Base Raw Material | Clay, Feldspar, sand and glaze |
| Governing Manufacturing Standards | All data where relevant to be established in accordance with BS EN 14411 : 2016 |
| UKCA Marking/DOP | www.marshalls.co.uk/declarations |



Arrento Core 800x800x20

PHYSICAL PROPERTIES

| | |
|------------------------------------|--------------------------|
| Work Dimensions (mm) | 800 x 800 x 20 |
| Nominal Dimensions (mm) | 800 x 800 x 20 |
| Durability (Freeze-thaw) | Frost resistant - Pass |
| Slip Resistance (Dry) | 82 |
| Slip Resistance (Wet) | 72 |
| Transverse/Flexural Split/Breaking | ≥ 35 N/mm ² |
| Water Absorption (%) | ≤ 0.5% by mass as a mean |

SPECIFICATION

| | |
|------------------------------|---|
| Approx unit weight (kg) | 31 |
| Reaction to fire | Class A1 - without testing (see decision 96/603/EC, as amended) |
| Installation | Available on request Keep all units dry before laying & protect incomplete workings during adverse weather or freezing conditions |
| Dangerous Substances | Lead NPD, Cadmium NPD |
| Suitability | Domestic use only |
| SUPPLY | |
| Av. Pack Size m ² | 25.6 |
| Units Per Pack | 40 |
| Av. pack weight (kg) | 1240 |

FURTHER INFORMATION

| | |
|------------------------|---|
| Cleaning & Maintenance | Available on request |
| Weathering | Due to the nature of the product scratch marks may appear on the surface during transportation and handling. If such marks appear they will weather away due to the through colour nature of the product. Weathering It should be appreciated that with all products weathering and site conditions can cause shade variation to appear across the surface of individual units. This does not in any way affect the performance of the units and any such variation will diminish over a period of time as the product matures. |
| Product Evolution | Marshalls reserve the right to amend the technical information as deemed necessary and in accordance with the relevant national and international standards without notice |
| Contact Us | For technical information on the design, specification and construction when utilising the product, contact Group Technical Services on 0370 411 2234 |