


# Atlas Textured Piora 80 200x100

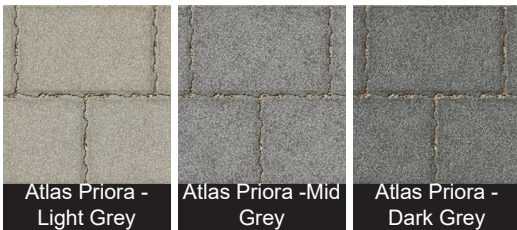

Atlas priora™ combines a stone aesthetic inspired by Chinese and Portuguese finishes with the proven strength and reliability required for long-lasting permeable paving performance. Designed specifically for SuDS applications, this range delivers effective surface water management without compromising on appearance or design flexibility.

With a textured surface and three neutral grey colour tones, Atlas priora offers a cost-effective alternative to natural granite, while supporting essential drainage requirements. Suitable for pedestrian, light, and commercial trafficked areas.

UK manufactured, Atlas priora incorporates additional surface technologies, alongside its permeable system. **SurfaceLock®** is our advanced surface durability technology that locks in colour and provides enhanced protection against UV fading, weathering, and everyday wear, while **CarbonStep®** reduces embodied carbon within the mix without compromising performance.

DESCRIPTION	
Appearance	Solid Unit with a smooth surface and integral spacers with Maxi-Mix Technology 4mm Facing layer
Manufacturing Process	Semi dry pressed & vibrated concrete
Base Raw Material	Concrete
Governing Manufacturing Standards	All data where relevant to be established in accordance with BS EN 1338 : 2003 (Block)
UKCA Marking/DOP	<a href="http://www.marshalls.co.uk/declarations">www.marshalls.co.uk/declarations</a>



# Atlas Textured Piora 80 200x100

## PHYSICAL PROPERTIES

Work Dimensions (mm)	198 x 98 x 80
Nominal Dimensions (mm)	200 x 100 x 80
Tolerances on Work Dimensions (mm)	Length ±2mm, width ±2mm, thickness ±3mm
Abrasion Resistance (mm)	≤ 23mm (Wide Wheel Abrasion Test)
Durability (Freeze-thaw)	≤ 1.0 kg/m <sup>2</sup> as a mean with no individual value > 1.5 kg/m <sup>2</sup>
Material Density	2300 kg/m <sup>3</sup> (typically)
Slip/Skid Resistance (polished)	Mean polished skid resistance value (PSRV) : > 45
Slip/Skid Resistance (unpolished)	Mean unpolished skid resistance value (USRV) : > 45
Thermal Conductivity (K value)	Design data as defined to BS EN 13369:2013
Tensile Splitting Strength	Characteristic tensile splitting strength not less than 3.6 MPa. None of the individual results shall be less than 2.9 MPa, nor have a failure load less than 250N/mm of splitting length

## SPECIFICATION

Approx unit weight (kg)	3.6
Emission of Asbestos	No content
External Fire Performance	Deeded to satisfy. See commission decision 2000/553/ECU
Reaction to fire	Class A1, see commission decision 2000/605/EC
Installation	Laid in accordance with BS7533-103:2026

## SUSTAINABILITY

Breemam	These units can achieve an "A" rated system when used in conjunction with the correct sub-base components
---------	---

## SITE WORKS

Coverage	50 no per m <sup>2</sup>
----------	--------------------------

## SUPPLY

Av. Pack Size m <sup>2</sup>	8.64
Units Per Pack	432
Av. pack weight (kg)	1555

## FURTHER INFORMATION

Cleaning & Maintenance	Available on request
Efflorescence	Any product containing cement during its early life may exhibit a temporary white discolouration known as efflorescence. This is not a product fault and will gradually disappear with exposure to natural weathering and trafficking
Weathering	It should be appreciated that with all products weathering and site conditions can cause shade variation to appear across the surface of individual units. This does not in any way affect the performance of the units and any such variation will diminish over a period of time as the product matures.
Product Evolution	Marshall's reserve the right to amend the technical information as deemed necessary and in accordance with the relevant national and international standards without notice. The evolution of new product design is continuous and information is subject to change without notice. Customers should check with the supplier to ensure that they have the latest details
Contact Us	For technical information on the design, specification and construction when utilising the product, contact Group Technical Services on 0333 220 2740

