

# ENVIRONMENTAL PRODUCT DECLARATION

## IN ACCORDANCE WITH EN 15804+A2 & ISO 14025 / ISO 21930

Chinese Granite Type 4 - Callisto  
Marshalls



**EPD HUB, HUB-2039**

Published on 08.11.2024, last updated on 10.04.2025, valid until 08.11.2029

## GENERAL INFORMATION

### MANUFACTURER

Manufacturer	Marshalls
Address	Landscape House, Premier Way, Elland HX5 9HT, England, UK
Contact details	epd@marshalls.co.uk
Website	www.marshalls.co.uk

### EPD STANDARDS, SCOPE AND VERIFICATION

Program operator	EPD Hub, hub@epdhub.com
Reference standard	EN 15804+A2:2019 and ISO 14025
PCR	EPD Hub Core PCR Version 1.1, 5 Dec 2023
Sector	Construction product
Category of EPD	Third party verified EPD
Scope of the EPD	Cradle to gate with options, A4-A5, and modules C1-C4, D
EPD author	Mike Edwards
EPD verification	Independent verification of this EPD and data, according to ISO 14025: <input type="checkbox"/> Internal verification <input checked="" type="checkbox"/> External verification
EPD verifier	Imane Uald Iamkaddam, as an authorized verifier acting for EPD Hub Limited

The manufacturer has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804 and if they are not compared in a building context.

### PRODUCT

Product name	Chinese Granite
Additional labels	Callisto
Product reference	-
Place of production	China
Period for data	2023
Averaging in EPD	No averaging
Variation in GWP-fossil for A1-A3	-

### ENVIRONMENTAL DATA SUMMARY

Declared unit	1 tonne
Declared unit mass	1000 kg
GWP-fossil, A1-A3 (kgCO <sub>2</sub> e)	58.4
GWP-total, A1-A3 (kgCO <sub>2</sub> e)	-0.12
Secondary material, inputs (%)	0
Secondary material, outputs (%)	93
Total energy use, A1-A3 (kWh)	437
Net freshwater use, A1-A3 (m <sup>3</sup> )	0.27

## PRODUCT AND MANUFACTURER

### ABOUT THE MANUFACTURER

Marshall's is the UK's largest manufacturer and supplier of building and hard landscaping products, including paving blocks and flags, kerbs, drainage channels, bricks, roof tiles, street furniture and natural stone paving. It provides products for both commercial and domestic markets.

### PRODUCT DESCRIPTION

Granite natural stone products quarried and processed in China, shipped to the UK and used in a variety of landscaping, infrastructure and other building applications

Total packaging mass is 27.2kg

Further information can be found at [www.marshall's.co.uk](http://www.marshall's.co.uk).

### PRODUCT RAW MATERIAL MAIN COMPOSITION

Raw material category	Amount, mass %	Material origin
Metals	-	-
Minerals	100	China
Fossil materials	-	-
Bio-based materials	-	-

### BIOGENIC CARBON CONTENT

Product's biogenic carbon content at the factory gate

Biogenic carbon content in product, kg C	-
Biogenic carbon content in packaging, kg C	14.28

### FUNCTIONAL UNIT AND SERVICE LIFE

Declared unit	1 tonne
Mass per declared unit	1000 kg
Functional unit	-
Reference service life	100

### SUBSTANCES, REACH - VERY HIGH CONCERN

The product does not contain any REACH SVHC substances in amounts greater than 0,1 % (1000 ppm).

# PRODUCT LIFE-CYCLE

## SYSTEM BOUNDARY

This EPD covers the life-cycle modules listed in the following table.

Product stage			Assembly stage		Use stage							End of life stage				Beyond the system boundaries	
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D	
x	x	x	x	x	MND	MND	MND	MND	MND	MND	MND	x	x	x	x	x	
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstruction/ demolition	Transport	Waste processing	Disposal	Reuse	Recovery
																	Recycling

Modules not declared = MND. Modules not relevant = MNR

## MANUFACTURING AND PACKAGING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production as well as packaging materials and other ancillary materials. Also, fuels used by machines, and handling of waste formed in the production processes at the manufacturing facilities are included in this stage. The study also considers the material losses occurring during the manufacturing processes as well as losses during electricity transmission.

The production process consists of four stages. The first is the separation of the natural stone from the rock face at the quarry. This is done either by explosives or by cutting and drilling. After this, the large stone block is cut into smaller blocks which are then transported to the manufacturing site. At the site the blocks are sawn and processed into the required shape and size. Finally, the stone products are given a finishing treatment and for the purposes of this EPD that relates to flaming as this is the most energy intensive of the possible finishing effects. Harvested rainwater is used for dust control to minimise the use of tap water. The final product is not washed.

The manufacturing energy use consists of grid electricity (specific to the province of extraction and manufacturing) used to power the equipment and lighting, as well as diesel for machinery. The flamed finish is produced through heat generated via natural gas supplies. As overall annual energy and production data for government and privately owned quarries in China is currently impossible to source, these quantities have been based on a timed study carried out on site directly by a Marshall's employee in China.

Manufacturing waste consists mainly of waste ancillary materials like drill bits and tools being recycled by a contracted waste manager located in 50 km proximity to the production site. Waste grease and oil are mostly collected and sent to the municipal incineration plant for energy recovery. The dust emissions are recorded on-site and the samples result in an average of 0.02 kg per 1 tonne of product.

This study includes the quarrying and crushing processes, internal transport, as well as equipment maintenance and infrastructure. Administration and the quarry's end of life are not taken into account. Removal of the topsoil layer (overburden) is not considered.



It also includes the land use (mineral extraction site and lake, no distinction of internal roads) considering an 80 year lifespan for the quarry.

### TRANSPORT AND INSTALLATION (A4-A5)

Transportation impacts occurred from final products delivery to construction site (A4) cover fuel direct exhaust emissions, environmental impacts of fuel production, as well as related infrastructure emissions.

The quarried stone is delivered to the manufacturing facility in bulk by lorry and after processing, cutting and finishing, the final product is transported by road to the port in China and then by ship to the UK. The finished product is then delivered from our UK storage facility to our customer sites and for this leg of the journey we have assumed a conservative average delivery distance of 320km.

Installation of the stone products is by hand and packaging materials are treated in the installation phase A5 with the waste processing of that packaging modelled in accordance with average data from Eurostat.

### PRODUCT USE AND MAINTENANCE (B1-B7)

The Use phase is out of scope of this EPD.

Air, soil, and water impacts during the use phase have not been studied.

### PRODUCT END OF LIFE (C1-C4, D)

At the end-of-life, in the demolition phase 100% of the waste is assumed to be collected as separate construction waste. The demolition process consumes energy in the form of diesel fuel used by building machines. Energy consumption of a demolition process is on

the average 10 kWh/m<sup>2</sup> (Bozdağ, Ö & Seçer, M. 2007). Basing on a Level(s) project, an average mass of a reinforced concrete building is about 1000 kg/m<sup>2</sup>. Therefore, energy consumption demolition is assumed to be 10 kWh/1000 kg = 0,01 kWh/kg. The source of energy is diesel fuel used by work machines (C1).

The dismantled natural stone is delivered to the nearest construction waste treatment plant. It is estimated that there is no mass loss during the use of the product, therefore the end-of-life product is assumed that it has the same weight with the declared product. Transportation distance to the closest disposal area is estimated as 100 km and the transportation method is lorry which is the most common (Editorial note: This is a reasonable assumption for an average distance to waste handling facilities in the UK) (C2).


At the waste treatment plant, waste that can be reused or recycled is separated and diverted for further use however for the purposes of this EPD, we have conservatively assumed that 93% of waste is crushed to be used in the next system as aggregates with the remaining 7% being sent to landfill.

(<https://www.gov.uk/government/statistics/uk-waste-data/uk-statistics-on-waste#recovery-rate-from-non-hazardous-construction-and-demolition-cd-waste>)

The processing for reuse is minimal, as the quality of the stone does not alter significantly during its useful life. The process losses of the waste treatment plant are assumed to be negligible.

Due to the recycling potential of stone, it can be used as secondary raw material, which avoids the production of virgin raw materials. The 93% is converted into secondary raw materials in the form of aggregates (D).

# MANUFACTURING PROCESS

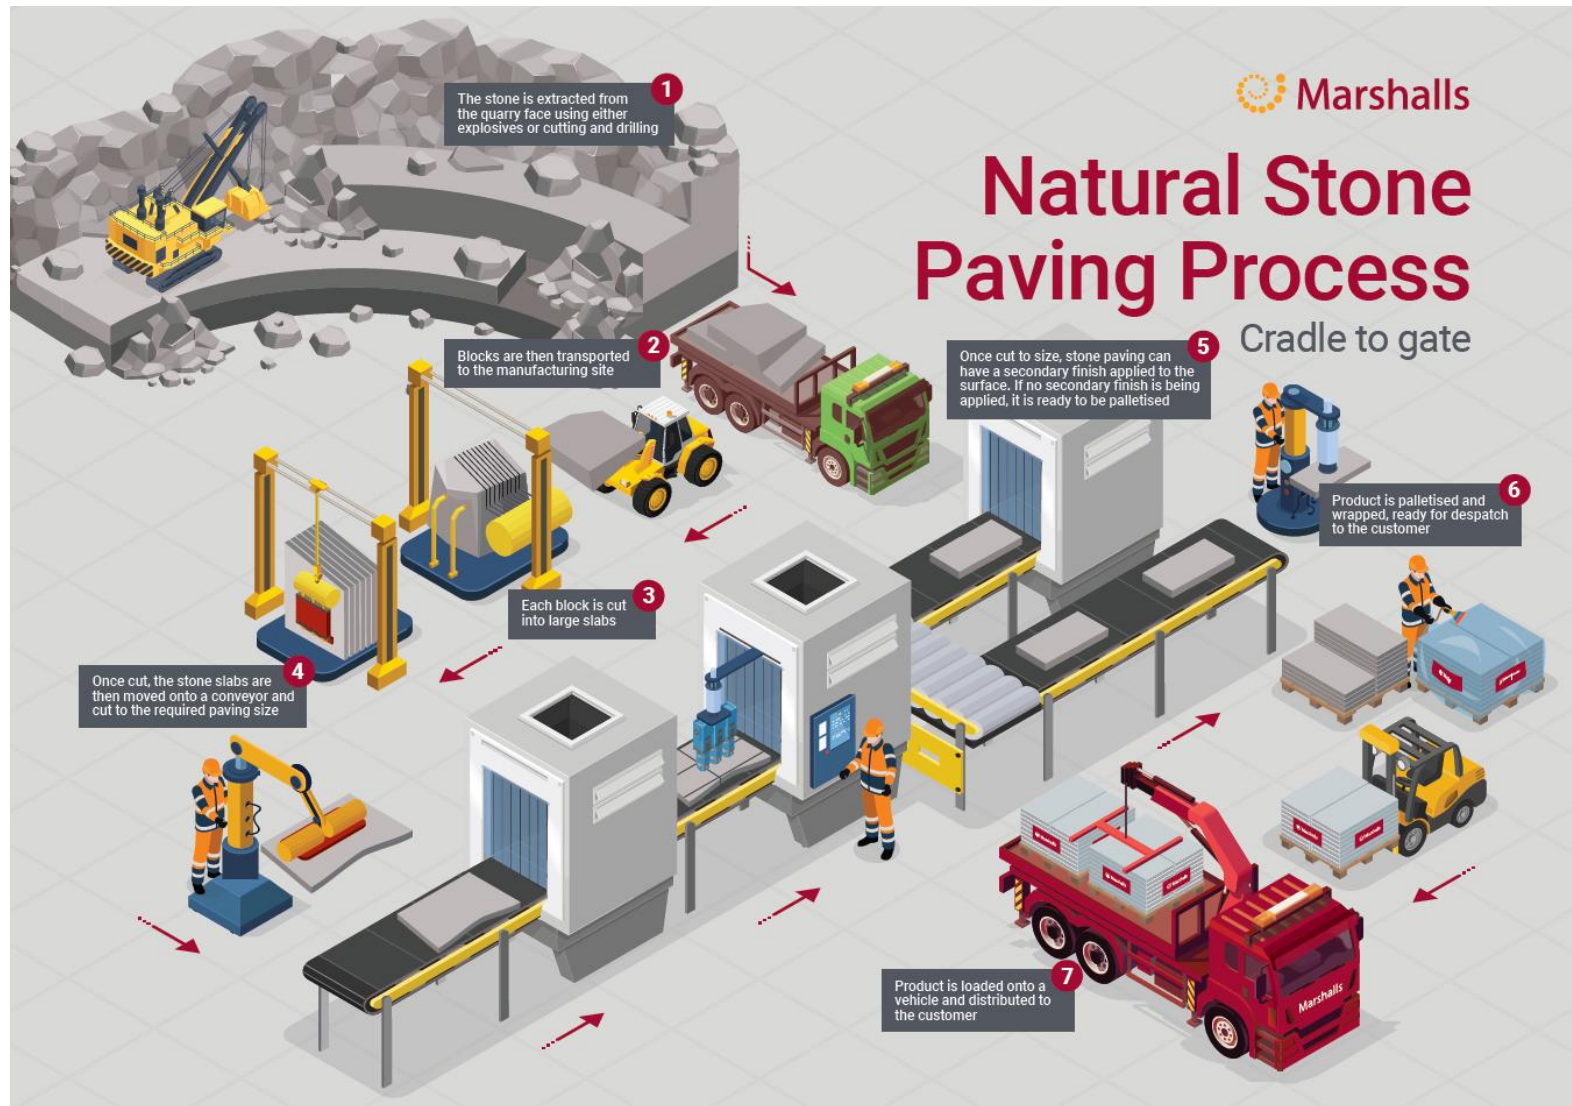

# LIFE-CYCLE ASSESSMENT

## CUT-OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the reference standard and the applied PCR. The study does not exclude any hazardous materials or substances. The study includes all major raw material and energy consumption. All inputs and outputs of the unit processes, for which data is available for, are included in the calculation. There is no neglected unit process more than 1% of total mass or energy flows. The module specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

## ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation. All allocations are done as per the reference standards and the applied PCR. In this study, allocation has been done in the following ways:

Data type	Allocation
Raw materials	No allocation
Packaging material	Allocated by mass or volume
Ancillary materials	Allocated by mass or volume
Manufacturing energy and waste	Allocated by mass or volume

## AVERAGES AND VARIABILITY

Type of average	No averaging
Averaging method	Not applicable
Variation in GWP-fossil for A1-A3	-

This EPD covers 1 granite natural stone type manufactured at 1 location.

## LCA SOFTWARE AND BIBLIOGRAPHY

This EPD has been created using One Click LCA EPD Generator. The LCA and EPD have been prepared according to the reference standards and ISO 14040/14044. The EPD Generator uses Ecoinvent v3.8, Plastics Europe, Federal LCA Commons and One Click LCA databases as sources of environmental data.

# ENVIRONMENTAL IMPACT DATA

## CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total <sup>1)</sup>	kg CO <sub>2</sub> e	5,52E+00	1,24E+00	-6,88E+00	-1,23E-01	2,23E+02	6,03E+01	MND	MND	MND	MND	MND	MND	MND	3,31E+00	6,30E-01	0,00E+00	3,69E-01	-8,98E+00
GWP – fossil	kg CO <sub>2</sub> e	5,52E+00	1,24E+00	5,16E+01	5,84E+01	2,22E+02	1,88E+00	MND	MND	MND	MND	MND	MND	MND	3,31E+00	6,30E-01	0,00E+00	3,69E-01	-8,91E+00
GWP – biogenic	kg CO <sub>2</sub> e	8,06E-04	3,85E-04	-5,86E+01	-5,86E+01	6,21E-02	5,85E+01	MND	MND	MND	MND	MND	MND	MND	6,06E-04	2,54E-04	0,00E+00	2,40E-04	-5,70E-02
GWP – LULUC	kg CO <sub>2</sub> e	2,55E-04	5,05E-04	7,71E-02	7,79E-02	1,50E-01	4,24E-04	MND	MND	MND	MND	MND	MND	MND	3,30E-04	2,45E-04	0,00E+00	3,48E-04	-1,21E-02
Ozone depletion pot.	kg CFC-11e	1,25E-07	2,91E-07	4,22E-06	4,63E-06	4,54E-05	8,54E-08	MND	MND	MND	MND	MND	MND	MND	7,07E-07	1,48E-07	0,00E+00	1,49E-07	-1,24E-06
Acidification potential	mol H <sup>+</sup> e	2,97E-02	7,03E-03	2,39E-01	2,75E-01	6,19E+00	5,02E-03	MND	MND	MND	MND	MND	MND	MND	3,44E-02	2,05E-03	0,00E+00	3,47E-03	-6,93E-02
EP-freshwater <sup>2)</sup>	kg Pe	1,09E-04	9,15E-06	2,16E-03	2,28E-03	9,65E-04	1,37E-05	MND	MND	MND	MND	MND	MND	MND	1,10E-05	5,34E-06	0,00E+00	3,86E-06	-3,34E-04
EP-marine	kg Ne	7,74E-03	2,53E-03	6,91E-02	7,93E-02	1,52E+00	2,29E-03	MND	MND	MND	MND	MND	MND	MND	1,52E-02	4,51E-04	0,00E+00	1,20E-03	-2,00E-02
EP-terrestrial	mol Ne	8,50E-02	2,78E-02	6,28E-01	7,41E-01	1,69E+01	2,21E-02	MND	MND	MND	MND	MND	MND	MND	1,67E-01	5,00E-03	0,00E+00	1,32E-02	-2,42E-01
POCP ("smog") <sup>3)</sup>	kg NMVOCe	2,23E-02	7,95E-03	1,82E-01	2,13E-01	4,41E+00	6,31E-03	MND	MND	MND	MND	MND	MND	MND	4,59E-02	1,94E-03	0,00E+00	3,84E-03	-6,34E-02
ADP-minerals & metals <sup>4)</sup>	kg Sbe	2,52E-06	4,24E-06	5,93E-05	6,61E-05	3,44E-04	1,74E-06	MND	MND	MND	MND	MND	MND	MND	1,68E-06	1,53E-06	0,00E+00	8,47E-07	-8,56E-05
ADP-fossil resources	MJ	4,92E+01	1,88E+01	5,82E+02	6,50E+02	2,90E+03	7,73E+00	MND	MND	MND	MND	MND	MND	MND	4,45E+01	9,86E+00	0,00E+00	1,01E+01	-1,52E+02
Water use <sup>5)</sup>	m <sup>3</sup> e depr.	5,42E-01	9,01E-02	1,12E+01	1,18E+01	9,43E+00	3,02E-01	MND	MND	MND	MND	MND	MND	MND	1,20E-01	4,40E-02	0,00E+00	3,21E-02	-1,64E+01

1) GWP = Global Warming Potential; 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO<sub>4</sub>e; 3) POCP = Photochemical ozone formation; 4) ADP = Abiotic depletion potential; 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.



## ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Particulate matter	Incidence	5,14E-07	1,37E-07	4,91E-06	5,56E-06	9,82E-06	6,45E-08	MND	MND	MND	MND	MND	MND	MND	9,22E-07	7,16E-08	0,00E+00	6,98E-08	-1,81E-06
Ionizing radiation <sup>6)</sup>	kBq U235e	4,20E-02	9,85E-02	1,88E+00	2,02E+00	1,34E+01	7,13E-02	MND	MND	MND	MND	MND	MND	MND	2,05E-01	4,72E-02	0,00E+00	4,57E-02	-2,07E+00
Ecotoxicity (freshwater)	CTUe	1,38E+02	1,58E+01	1,45E+03	1,60E+03	1,98E+03	8,61E+00	MND	MND	MND	MND	MND	MND	MND	2,68E+01	8,77E+00	0,00E+00	6,59E+00	-2,64E+02
Human toxicity, cancer	CTUh	1,29E-09	6,02E-10	1,95E-08	2,14E-08	1,24E-07	3,04E-09	MND	MND	MND	MND	MND	MND	MND	1,03E-09	2,15E-10	0,00E+00	1,65E-10	-9,84E-09
Human tox. non-cancer	CTUh	5,31E-08	1,76E-08	6,14E-07	6,85E-07	1,42E-06	1,62E-08	MND	MND	MND	MND	MND	MND	MND	1,94E-08	8,44E-09	0,00E+00	4,31E-09	-1,95E-07
SQP <sup>7)</sup>	-	1,06E+01	1,63E+01	6,71E+03	6,74E+03	9,57E+02	1,02E+01	MND	MND	MND	MND	MND	MND	MND	5,79E+00	1,13E+01	0,00E+00	2,16E+01	-2,73E+02

6) EN 15804+A2 disclaimer for Ionizing radiation, human health. This impact category deals mainly with the eventual impact of low-dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator; 7) SQP = Land use related impacts/soil quality.

## USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER as energy <sup>8)</sup>	MJ	2,32E+01	2,74E-01	9,25E+02	9,48E+02	2,23E+01	4,12E-01	MND	MND	MND	MND	MND	MND	MND	2,54E-01	1,11E-01	0,00E+00	8,78E-02	-9,19E+01
Renew. PER as material	MJ	0,00E+00	0,00E+00	4,76E+02	4,76E+02	0,00E+00	-4,76E+02	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	5,02E-02
Total use of renew. PER	MJ	2,32E+01	2,74E-01	1,40E+03	1,42E+03	2,23E+01	-4,75E+02	MND	MND	MND	MND	MND	MND	MND	2,54E-01	1,11E-01	0,00E+00	8,78E-02	-9,19E+01
Non-re. PER as energy	MJ	4,92E+01	1,88E+01	5,56E+02	6,24E+02	2,90E+03	7,73E+00	MND	MND	MND	MND	MND	MND	MND	4,45E+01	9,86E+00	0,00E+00	1,01E+01	-1,37E+02
Non-re. PER as material	MJ	0,00E+00	0,00E+00	3,54E+01	3,54E+01	0,00E+00	-3,54E+01	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,52E+01
Total use of non-re. PER	MJ	4,92E+01	1,88E+01	5,91E+02	6,59E+02	2,90E+03	-2,76E+01	MND	MND	MND	MND	MND	MND	MND	4,45E+01	9,86E+00	0,00E+00	1,01E+01	-1,22E+02
Secondary materials	kg	8,51E-03	6,29E-03	6,15E-01	6,30E-01	1,23E+00	6,45E-03	MND	MND	MND	MND	MND	MND	MND	1,74E-02	2,73E-03	0,00E+00	2,12E-03	2,43E-01
Renew. secondary fuels	MJ	4,19E-05	6,56E-05	3,22E-02	3,23E-02	4,42E-03	6,02E-05	MND	MND	MND	MND	MND	MND	MND	5,70E-05	2,76E-05	0,00E+00	5,55E-05	-1,03E-03
Non-ren. secondary fuels	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of net fresh water	m <sup>3</sup>	1,28E-02	2,50E-03	2,58E-01	2,73E-01	2,21E-01	9,42E-03	MND	MND	MND	MND	MND	MND	MND	2,70E-03	1,27E-03	0,00E+00	1,11E-02	-3,91E-01

8) PER = Primary energy resources.

## END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg	6,60E-01	2,17E-02	5,12E+00	5,80E+00	3,93E+00	1,32E-02	MND	MND	MND	MND	MND	MND	MND	5,96E-02	1,30E-02	0,00E+00	0,00E+00	-5,98E-01
Non-hazardous waste	kg	4,21E+00	3,85E-01	4,58E+01	5,04E+01	3,80E+01	2,16E+01	MND	MND	MND	MND	MND	MND	MND	4,19E-01	2,13E-01	0,00E+00	7,00E+01	-1,42E+01
Radioactive waste	kg	5,49E-05	1,29E-04	7,74E-04	9,57E-04	2,03E-02	2,67E-05	MND	MND	MND	MND	MND	MND	MND	3,13E-04	6,64E-05	0,00E+00	0,00E+00	-8,96E-04

## END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for re-use	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	9,30E+02	0,00E+00	0,00E+00
Materials for recycling	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	9,54E+00	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for energy rec	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	9,63E+00	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,08E+02	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

## ENVIRONMENTAL IMPACTS – EN 15804+A1, CML / ISO 21930

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Pot.	kg CO <sub>2</sub> e	5,28E+00	1,23E+00	4,97E+01	5,63E+01	2,21E+02	2,59E+00	MND	MND	MND	MND	MND	MND	MND	3,27E+00	6,23E-01	0,00E+00	3,61E-01	-8,76E+00
Ozone depletion Pot.	kg CFC-11e	1,02E-07	2,31E-07	3,09E-06	3,43E-06	3,60E-05	6,92E-08	MND	MND	MND	MND	MND	MND	MND	5,60E-07	1,17E-07	0,00E+00	1,18E-07	-1,02E-06
Acidification	kg SO <sub>2</sub> e	2,37E-02	5,27E-03	1,92E-01	2,20E-01	4,96E+00	3,62E-03	MND	MND	MND	MND	MND	MND	MND	2,45E-02	1,66E-03	0,00E+00	2,62E-03	-5,21E-02
Eutrophication	kg PO <sub>4</sub> <sup>3</sup> e	5,62E-03	1,23E-03	6,31E-02	7,00E-02	5,62E-01	3,72E-02	MND	MND	MND	MND	MND	MND	MND	5,69E-03	3,64E-04	0,00E+00	5,65E-04	-1,86E-02
POCP ("smog")	kg C <sub>2</sub> H <sub>4</sub> e	8,22E-04	1,72E-04	1,16E-02	1,26E-02	1,29E-01	3,11E-04	MND	MND	MND	MND	MND	MND	MND	5,36E-04	7,66E-05	0,00E+00	1,10E-04	-2,91E-03
ADP-elements	kg Sbe	2,47E-06	4,14E-06	5,80E-05	6,46E-05	3,37E-04	1,62E-06	MND	MND	MND	MND	MND	MND	MND	1,65E-06	1,49E-06	0,00E+00	8,35E-07	-8,45E-05
ADP-fossil	MJ	4,92E+01	1,88E+01	5,82E+02	6,50E+02	2,90E+03	7,73E+00	MND	MND	MND	MND	MND	MND	MND	4,45E+01	9,86E+00	0,00E+00	1,01E+01	-1,52E+02

## CONVERSION TO PRODUCT SIZES

This EPD is calculated per tonne of granite type due to the infinite sizes and formats of final products that are possible with a naturally occurring material.

However, the correlation between the material and energy inputs to calculate A1-A4 data is linear, therefore, to calculate A1-A4 values for a particular size/volume of product, please use an average density of 2700kg/m<sup>3</sup> of granite in your conversion calculations.

**For example**, if the product you are using is 900x600x63 paving slab and the stated GWP A1-A4 number is 222.88kg CO<sub>2</sub>e/tonne:

$$0.9 \times 0.6 \times 0.063 = 0.03402 \text{m}^3$$

$$0.03402 \times 2700 = 91.854 \text{kg}$$

$$(91.854/1000) \times 222.88 = \mathbf{20.47 \text{ kg CO}_2\text{e for that size unit of paving}}$$

To convert that to a value per square metre:

$$0.9 \times 0.6 = 0.54$$

$$1/0.54 = 1.85$$

$$20.47 \times 1.85 = \mathbf{37.87 \text{ kg CO}_2\text{e per sqm of 63mm thick paving}}$$

## VERIFICATION STATEMENT

### VERIFICATION PROCESS FOR THIS EPD

This EPD has been verified in accordance with ISO 14025 by an independent, third-party verifier by reviewing results, documents and compliancy with reference standard, ISO 14025 and ISO 14040/14044, following the process and checklists of the program operator for:

- This Environmental Product Declaration
- The Life-Cycle Assessment used in this EPD
- The digital background data for this EPD

Why does verification transparency matter? Read more online  
This EPD has been generated by One Click LCA EPD generator, which has been verified and approved by the EPD Hub.

### THIRD-PARTY VERIFICATION STATEMENT

I hereby confirm that, following detailed examination, I have not established any relevant deviations by the studied Environmental Product Declaration (EPD), its LCA and project report, in terms of the data collected and used in the LCA calculations, the way the LCA-based calculations have been carried out, the presentation of environmental data in the EPD, and other additional environmental information, as present with respect to the procedural and methodological requirements in ISO 14025:2010 and reference standard.

I confirm that the company-specific data has been examined as regards plausibility and consistency; the declaration owner is responsible for its factual integrity and legal compliance.

I confirm that I have sufficient knowledge and experience of construction products, this specific product category, the construction industry, relevant standards, and the geographical area of the EPD to carry out this verification.

I confirm my independence in my role as verifier; I have not been involved in the execution of the LCA or in the development of the declaration and have no conflicts of interest regarding this verification.

Imane Uald lamkaddam, as an authorized verifier acting for EPD Hub Limited  
08.11.2024

