


## Drivesett Tegula Priora® Medium 160 x 160 x 60mm

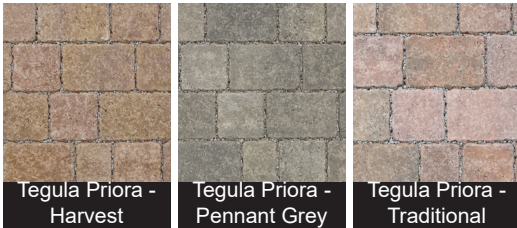

Combining our most popular block paving with our patented Priora® design, Drivesett Tegula Priora® offers superior driveway strength whilst helping to manage heavy rainfall in a sustainable way, with surface water passing through into the ground below. Drivesett® Tegula is renowned for its lasting high quality look, whilst featuring an elegant time-worn appearance.

Marshall's have a comprehensive range of permeable options, please explore our full range.

To find out more about how to install Marshall's® patented Priora systems take a look at the installation guide, and to see just how effective they are we've created this helpful information video.

| DESCRIPTION                       |                                                                                |
|-----------------------------------|--------------------------------------------------------------------------------|
| Appearance                        | Solid unit with integral spacers intended to create 6mm drainage apertures     |
| Manufacturing Process             | Semi dry pressed & vibrated concrete                                           |
| Base Raw Material                 | Concrete                                                                       |
| Governing Manufacturing Standards | All data where relevant to be established in accordance with BS EN 1338 : 2003 |
| UKCA Marking/DOP                  | <a href="http://www.marshalls.co.uk/dop">www.marshalls.co.uk/dop</a>           |



# Drivesett Tegula Priora® Medium 160 x 160 x 60mm

## PHYSICAL PROPERTIES

|                                    |                                                                                                                                                                                         |
|------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Work Dimensions (mm)               | 158 x 158 x 60                                                                                                                                                                          |
| Nominal Dimensions (mm)            | 160 x 160 x 60                                                                                                                                                                          |
| Abrasion Resistance (mm)           | ≤ 23mm (Wide Wheel Abrasion Test)                                                                                                                                                       |
| Material Density                   | 2300 kg/m³ (typically)                                                                                                                                                                  |
| Slip/Skid Resistance (polished)    | PSRV > 45                                                                                                                                                                               |
| Slip/Skid Resistance (unpolished)  | USRV > 45                                                                                                                                                                               |
| Transverse/Flexural Split/Breaking | Characteristic tensile splitting strength not less than 3.6MPa. None of the individual results shall be less than 2.9MPa, nor have a failure load less than 250N/mm of splitting length |

## SPECIFICATION

|                           |                                          |
|---------------------------|------------------------------------------|
| Approx unit weight (kg)   | 3.3                                      |
| Emission of Asbestos      | No content                               |
| External Fire Performance | Deemed to satisfy when used for roofing  |
| Reaction to fire          | Class A1 when used for internal flooring |

## SUSTAINABILITY

|                  |    |
|------------------|----|
| Carbon Footprint | 16 |
|------------------|----|

## SUPPLY

|                      |         |
|----------------------|---------|
| Av. Pack Size m2     | 9.68    |
| Av. pack weight (kg) | 1230.29 |

## FURTHER INFORMATION

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Cleaning & Maintenance | If maintenance is required then the following regime is recommended:<br>1. After a major storm, if no ponding is apparent, no further action is necessary<br>2. If ponding is apparent, vacuum and brush the surface openings to remove debris and encrusted sediment<br>3. Maintain area free of vegetation<br>4. Repair deformation exceeding 13 mm<br>5. Replenish aggregate joint materials as needed<br>6. Reset pavers more than 6mm above/below adjacent units |
| Efflorescence          | Any product containing cement during its early life may exhibit a temporary white discolouration known as efflorescence. This is not a product fault and will gradually disappear with exposure to natural weathering and trafficking                                                                                                                                                                                                                                 |
| Weathering             | It should be appreciated that with all products weathering and site conditions can cause shade variation to appear across the surface of individual units. This does not in any way affect the performance of the units and any such variation will diminish over a period of time as the product matures.                                                                                                                                                            |
| Product Evolution      | Marshall's reserve the right to amend the technical information as deemed necessary and in accordance with the relevant national and international standards without notice                                                                                                                                                                                                                                                                                           |
| Contact Us             | For technical information on the design, specification and construction when utilising the product, contact Group Technical Services on 0370 411 2233                                                                                                                                                                                                                                                                                                                 |

