


## Drivesys® Original Cobble Mixed Sized Pack

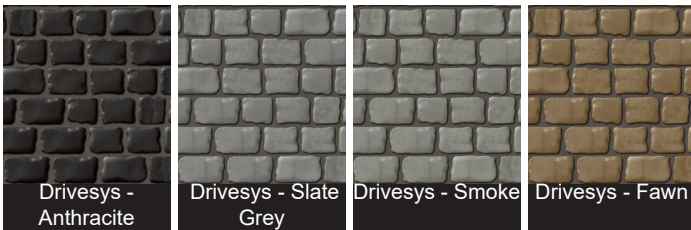

Some items not available to buy online at this time, to place an order or enquire about this product please ring us on 0333 220 2729

Drivesys® Original Cobble creates a realistic antique cobblestone look with all the benefits of an easy-to-install engineered concrete driveway system. Cast from aged and timeworn cobbles, Drivesys® Original Cobble can be used as a single colour or blended using a variety of colours to create a natural cobblestone effect and enhance the charm and elegance of any home.

Our Drivesys Range is supplied with our specially formulated Drivesys® Jointing compound, making the installation of this driveway project hassle-free and helps to reduce the amount of unsightly weed growth between the blocks.

Co-ordinating Drivesys® Roundtop Edging is available to give a high-end look to your completed project.

DESCRIPTION	
Manufacturing Process	Wet cast moulded & vibrated concrete
Base Raw Material	Concrete
Governing Manufacturing Standards	All data where relevant to be established in accordance with BS EN 1338 : 2003
UKCA Marking/DOP	<a href="http://www.marshalls.co.uk/dop">www.marshalls.co.uk/dop</a>





## Drivesys® Original Cobble Mixed Sized Pack

### PHYSICAL PROPERTIES

Nominal Dimensions (mm)	215 x 130 x 60
185 x 130 x 60	
165 x 130 x 60	
145 x 130 x 60	
130 x 130 x 60	
Abrasion Resistance (mm)	≤ 20mm (Wide Wheel Abrasion Test)
Durability (Freeze-thaw)	≤ 0.1 kg/m <sup>2</sup> as a mean with no individual value > 0.2 kg/m <sup>2</sup>
Material Density	2392 kg/m <sup>3</sup> (typically)
Slip/Skid Resistance (unpolished)	USRV > 30
Compressive Strength (Mpa)	Characteristic bending strength of 5.0 MPa with no individual result less than 4.0 MPa

### SPECIFICATION

Emission of Asbestos	No content
External Fire Performance	Deemed to satisfy when used for roofing
Reaction to fire	Class A1 when used for internal flooring

### SUPPLY

Av. pack weight (kg)	1064.9
----------------------	--------

### FURTHER INFORMATION

Cleaning & Maintenance	Available on request
Efflorescence	Any product containing cement during its early life may exhibit a temporary white discolouration known as efflorescence. This is not a product fault and will gradually disappear with exposure to natural weathering and trafficking
Weathering	It should be appreciated that with all products weathering and site conditions can cause shade variation to appear across the surface of individual units. This does not in any way affect the performance of the units and any such variation will diminish over a period of time as the product matures.
Product Evolution	Marshall's reserve the right to amend the technical information as deemed necessary and in accordance with the relevant national and international standards without notice
Contact Us	For technical information on the design, specification and construction when utilising the product, contact Group Technical Services on 0370 411 2233

