


Granite Eclipse® Paving 1212 x 606 x 30mm

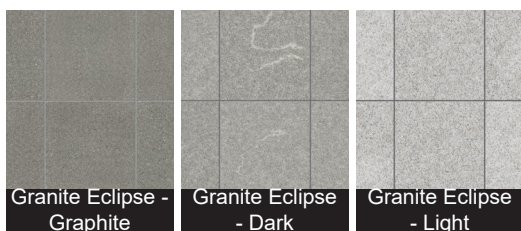

Use granite eclipse paving to create an extremely durable and modern patio space to enjoy with family and friends. A brushed surface and lightly flamed finish intensifies already vibrant colours whilst also providing excellent slip resistance even when wet.

Create contrast and unique patterns by mixing the light and dark shades from this range. Complementary granite setts can be utilised as a border as a perfect finish to your project.

For those gardens with varying levels, we offer a range of granite steps to create a seamless transition and when combined with Marshall's Drystack veneer it creates a stunning finish.

For installation, see our Eclipse Granite paving installation guide.

DESCRIPTION	
Appearance	Fine Picked finish
Quarry Location	Quarries in the Fujian province of China
Base Raw Material	Natural Stone
Governing Manufacturing Standards	All data where relevant to be established in accordance with BS EN 1341 : 2012
UKCA Marking/DOP	www.marshalls.co.uk/dop

Granite Eclipse® Paving 1212 x 606 x 30mm

PHYSICAL PROPERTIES

Work Dimensions (mm)	1212 x 606 x 30
Abrasion Resistance (mm)	≤ 23mm (Wide Wheel Abrasion Test)
Material Density	2600 kg/m³ (typically)
Slip/Skid Resistance (polished)	> 45 PSRV
Slip/Skid Resistance (unpolished)	67 USRV
Transverse/Flexural Split/Breaking	12.0 MPa (minimum)
Water Absorption (%)	0.2% maximum

SPECIFICATION

Approx unit weight (kg)	57.4
Installation	Available on request Keep all units dry before laying & protect incomplete workings during adverse weather or freezing conditions

SUSTAINABILITY

Carbon Footprint	48
------------------	----

SITE WORKS

Coverage	11.5776
----------	---------

SUPPLY

Av. Pack Size m2	11.66
Units Per Pack	16
Av. pack weight (kg)	922.08

FURTHER INFORMATION

Cleaning & Maintenance	Available on request
------------------------	----------------------

Efflorescence

Weathering	It should be appreciated that with all products weathering and site conditions can cause shade variation to appear across the surface of individual units. This does not in any way affect the performance of the units and any such variation will diminish over a period of time as the product matures.
------------	--

Product Evolution

Marshall's reserve the right to amend the technical information as deemed necessary and in accordance with the relevant national and international standards without notice

Contact Us

For technical information on the design, specification and construction when utilising the product, contact Group Technical Services on 0370 411 2233

