




Pendle Paving 600 x 600 x 38mm

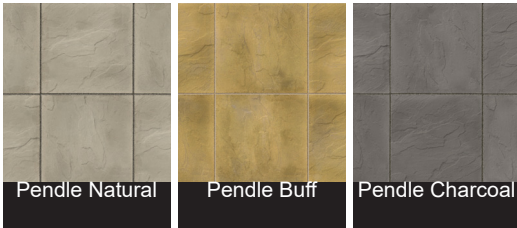

Pendle utility paving offers a hard wearing and effective solution when basic, functional paving is all that is required. The riven texture mimics a natural stone surface while also providing excellent slip resistant properties.

Not suitable as a decorative patio, ideal for greenhouse or shed bases and utility areas. For other cost effective paving look in our utility paving section.

If a functional edging is required, Pendle is often used in conjunction with Marshalls Round Top edging.

DESCRIPTION	
Manufacturing Process	Hydraulically pressed concrete
Base Raw Material	Concrete
Governing Manufacturing Standards	All data where relevant to be established in accordance with BS EN 1339 : 2003
UKCA Marking/DOP	www.marshalls.co.uk/dop





Pendle Paving 600 x 600 x 38mm

PHYSICAL PROPERTIES

Work Dimensions (mm)	598 x 598 x 38
Nominal Dimensions (mm)	600 x 600 x 38
Abrasion Resistance (mm)	≤ 23mm (Wide Wheel Abrasion Test)
Material Density	2300 kg/m ³ (typically)
Slip/Skid Resistance (polished)	PSRV > 45
Slip/Skid Resistance (unpolished)	USRV > 45
Transverse/Flexural Split/Breaking	Characteristic bending strength of 3.5 MPa with no individual result less than 2.8 MPa

SPECIFICATION

Approx unit weight (kg)	35.5
Emission of Asbestos	No content
External Fire Performance	Deemed to satisfy when used for roofing
Reaction to fire	Class A1 when used for internal flooring
Installation	Available on request. Keep all units dry before laying & protect incomplete workings during adverse weather or freezing conditions

SUSTAINABILITY

Carbon Footprint	9.5
------------------	-----

SUPPLY

Av. Pack Size m ²	9
Av. pack weight (kg)	819

FURTHER INFORMATION

Cleaning & Maintenance	Available on request
Efflorescence	Any product containing cement during its early life may exhibit a temporary white discolouration known as efflorescence. This is not a product fault and will gradually disappear with exposure to natural weathering and trafficking
Weathering	It should be appreciated that with all products weathering and site conditions can cause shade variation to appear across the surface of individual units. This does not in any way affect the performance of the units and any such variation will diminish over a period of time as the product matures.
Product Evolution	Marshalls reserve the right to amend the technical information as deemed necessary and in accordance with the relevant national and international standards without notice
Contact Us	For technical information on the design, specification and construction when utilising the product, contact Group Technical Services on 0370 411 2233

