


Savanna® Linear 200 x 50 x 60

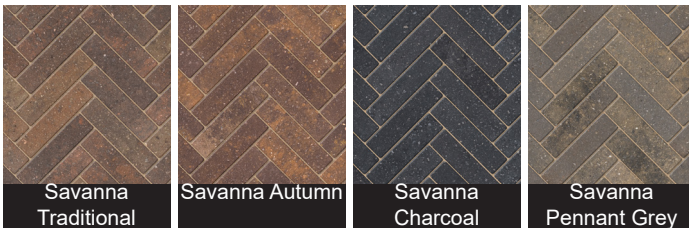

Savanna® Linear is a modern linear concrete paver, perfect for driveways, patios and paths. This on-trend aesthetic has made its way from internal flooring to outdoor landscaping and suits a variety of property styles. Savanna® Linear is a concrete alternative to the linear clay pavers on the market and provides a more sustainable, cost-effective option for your project.

Savanna Linear® is a range extension of our current Savanna® block paving

DESCRIPTION	
Manufacturing Process	Semi dry pressed & vibrated concrete
Base Raw Material	Concrete
Governing Manufacturing Standards	All data where relevant to be established in accordance with BS EN 1338 : 2003
UKCA Marking/DOP	www.marshalls.co.uk/declarations



Savanna® Linear 200 x 50 x 60

PHYSICAL PROPERTIES

Work Dimensions (mm)	198 x 48 x 60
Nominal Dimensions (mm)	200 x 50 x 60
Abrasion Resistance (mm)	≤ 23mm (Wide Wheel Abrasion Test)
Durability (Freeze-thaw)	≤ 1.0 kg/m ² as a mean with no individual value > 1.5 kg/m ²
Material Density	2300 kg/m ³ (typically)
Slip/Skid Resistance (polished)	PSRV > 45
Slip/Skid Resistance (unpolished)	USRV > 45
Tensile Splitting Strength	Characteristic tensile splitting strength not less than 3.6MPa. None of the individual results shall be less than 2.9MPa, nor have a failure load less than 250N/mm of splitting length

SPECIFICATION

Approx unit weight (kg)	1.265
Emission of Asbestos	No content
External Fire Performance	Deemed to satisfy when used for roofing
Reaction to fire	Class A1 when used for internal flooring

SUPPLY

Av. Pack Size m2	8
Units Per Pack	800
Av. pack weight (kg)	1012

FURTHER INFORMATION

Cleaning & Maintenance	Available on request
Efflorescence	Any product containing cement during its early life may exhibit a temporary white discolouration known as efflorescence. This is not a product fault and will gradually disappear with exposure to natural weathering and trafficking
Weathering	It should be appreciated that with all products weathering and site conditions can cause shade variation to appear across the surface of individual units. This does not in any way affect the performance of the units and any such variation will diminish over a period of time as the product matures.
Product Evolution	Marshall's reserve the right to amend the technical information as deemed necessary and in accordance with the relevant national and international standards without notice
Contact Us	For technical information on the design, specification and construction when utilising the product, contact Group Technical Services on 0370 411 2233

