


SYMPHONY® Jointing Compound

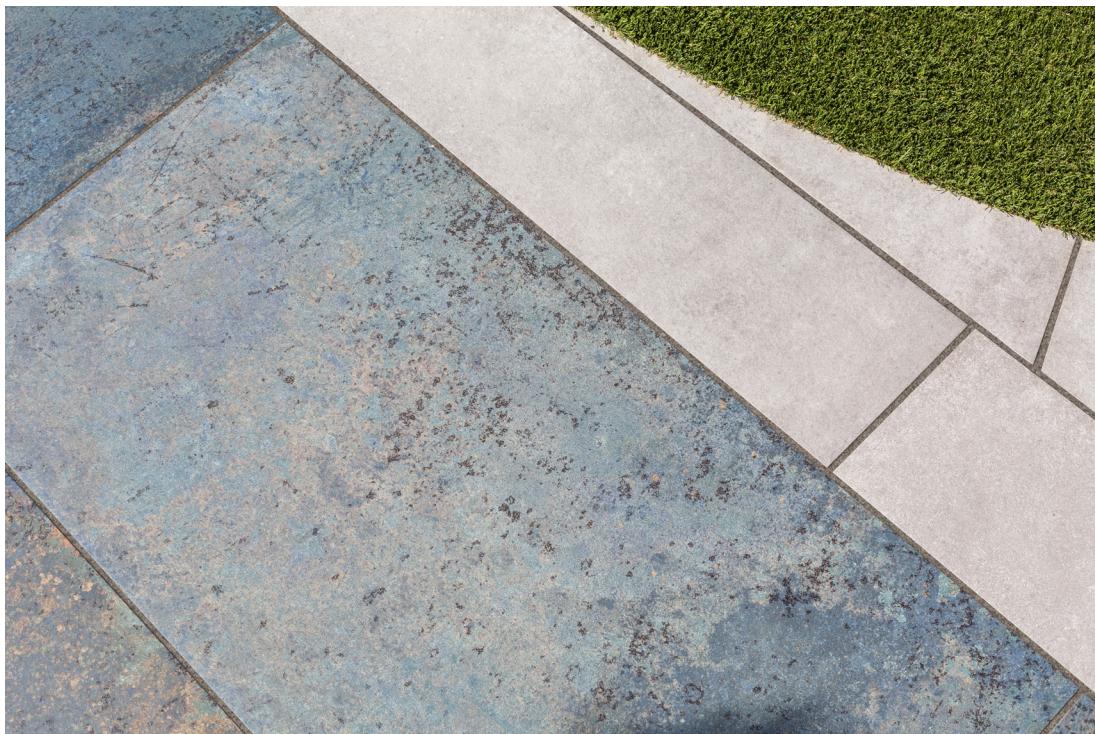

SYMPHONY® Jointing Compound has been developed specifically for use with the Marshalls porcelain paving ranges. Available in two colours to compliment all products in the range, this fine textured jointing compound offers a smooth, more aesthetically pleasing finish to your project.

DESCRIPTION

| | |
|-----------------------------------|---|
| Type | Highly advanced polymeric modified sand binder, ready mixed jointing compound |
| Governing Manufacturing Standards | In-House Company Specification |

Our Jointing Compound Mini-Booklet offers useful tips and further information on all of the jointing options we have available.



SYMPHONY® Jointing Compound

PHYSICAL PROPERTIES

SPECIFICATION

| | |
|-------------------------|--|
| Approx unit weight (kg) | 20 |
| Installation | Patio & pathways for domestic pedestrian use only Not suitable for use around a swimming pool, hot tub or on balconies Can be applied in wet or dry weather conditions but water must always be added Always install ample falls to take surface water to a drain or soakaway and always install on a free-draining sub-grade Drainage holes should be used when paving is laid on a full mortar bed. Pour Jointing Compound onto saturated paving. Brush into joints & sweep up excess material. Keep saturating area with water to activate. Ensure residue is washed away to avoid surface staining. Leave to dry |
| Suitability | Domestic use only |
| SUPPLY | |
| Packaging | Plastic Tubs |

FURTHER INFORMATION

Cleaning & Maintenance

Available on request

Weathering

It should be appreciated that with all products weathering and site conditions can cause shade variation to appear across the surface of individual units. This does not in any way affect the performance of the units and any such variation will diminish over a period of time as the product matures.

Product Evolution

Marshalls reserve the right to amend the technical information as deemed necessary and in accordance with the relevant national and international standards without notice

Contact Us

For technical information on the design, specification and construction when utilising the product, contact Group Technical Services on 0370 411 2233