


Larissa Granite

Date Created: 19/01/22

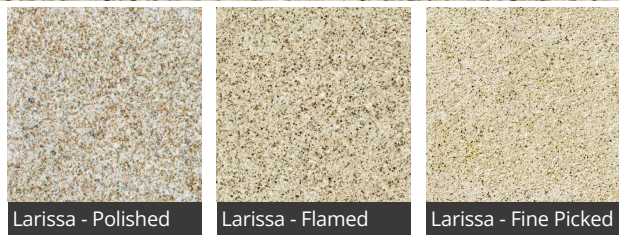

Larissa - Polished

Larissa - Flamed

Larissa - Fine Picked

*It should be noted that colour variations and markings are characteristic of Natural Stone. Inherent variations cannot be controlled nor the precise shade of stone guaranteed.

Larissa Granite is a versatile and durable stone that offers hard-wearing performance and strength while adding elegance to a wide range of schemes. A light beige colour, Larissa Granite delivers the resilience that granite is known for. Suitable for pedestrian and vehicular trafficked areas, it is available across a wide range of product areas including paving, setts, kerbs, tactile, steps, water management and street furniture. Larissa Granite is available in a choice of finishes - polished, fine picked and flamed. All Marshalls granites are fully tested to the appropriate standards in the UK and where relevant UKCA marked in accordance with the latest legislation.

DESCRIPTION	
Appearance	Buff with black and white and fine silver inclusions
Manufacturing Process	Sawn
Geological Type	Granite
Quarry of Origin	Shandong Province, China
Governing Manufacturing Standards	All data where relevant to be established in accordance with BS EN 1341 : 2012, BS EN 1342 : 2012 & BS EN 1343 : 2012
Petrographical Description	Off white to pale grey and spotted orange coarse grained granite
UKCA Marking/DOP	https://www.marshalls.co.uk/declarations

Larissa Granite

Date Created: 19/01/22

PHYSICAL PROPERTIES

Work Dimensions (mm)	450 x 450 x 50
	450 x 450 x 60
	450 x 450 x 70
	900 x 450 x 50
	900 x 450 x 60
	900 x 450 x 70
	600 x 600 x 50
	600 x 600 x 60
	600 x 600 x 70
	900 x 600 x 50
	900 x 600 x 60
	900 x 600 x 70
	200 x 100 x 50
	200 x 100 x 60
	200 x 100 x 70
	300 x 100 x 50
	300 x 100 x 60
	300 x 100 x 70
	300 x 150 x 50
	300 x 150 x 60
300 x 150 x 70	
300 x 200 x 50	
300 x 200 x 60	
300 x 200 x 70	
Abrasion Resistance (mm)	16.5mm (Mean value to EN 14157 : 2004 (Hev = 16.5mm))
Durability (Freeze-thaw)	11/12.2 MPa (Mean values to EN 12371 : 2006)
Material Density	2590 kg/m ³ (Mean value to EN 1936 : 2006)
Open Porosity (%)	1.15% (Mean value to EN 1936 : 2006)
Compressive Strength (MPa)	169 MPa (Mean value to EN 1926 : 2006 (Lev = 133 MPa))
Water Absorption (%)	0.4% (Mean value to EN 13755 : 2002 (Hev = 0.4%))
Transverse/FlexuralSplit/Breaking	14.3 MPa (Mean value to EN 12372 : 2006 (Lev = 12.6 MPa))

MANUFACTURING

Materials Control UKCA Marked to BS EN 1341 Paving

SUSTAINABILITY

ERI Score Our Score: 1.4
Cluster Score: 1.1

FURTHER INFORMATION

Cleaning & Maintenance Available on request

Contact Us For technical information on the design, specification and construction when utilising the product, contact Group Technical Services on 0370 411 2233


TEXTURE SPECIFIC PROPERTIES

	Polished	Flamed	Fine Picked
Light Reflectance Value (LRV)	35.94	38.85	59.05
Surface Roughness (Rz-µm)	8	54.4	>75
Slip Resistance (BS 14231) (Dry)	69	90	91
Slip Resistance (BS 14231) (Wet)	14	63	77

Larissa Granite

Date Created: 19/01/22

Suggested Plan Sizes

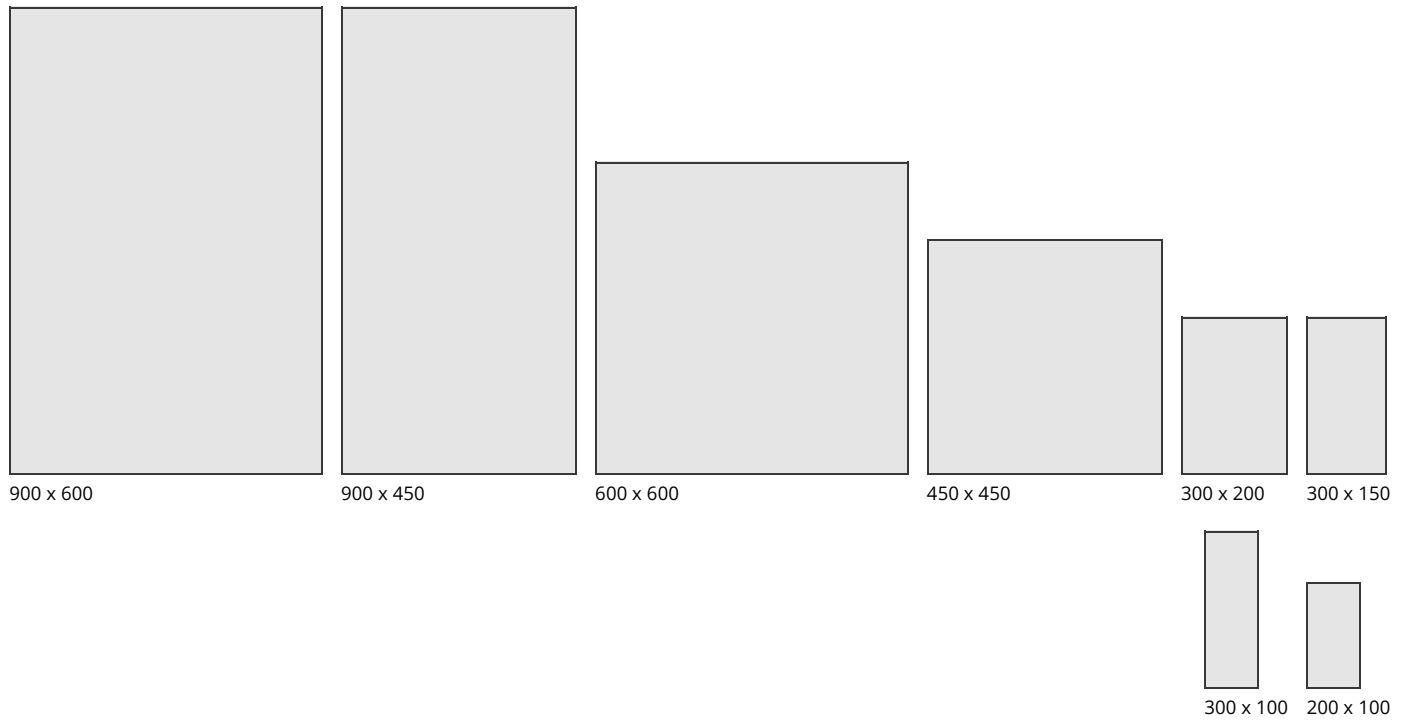

The plan sizes shown above illustrate popular sizes of our Natural Stone. Bespoke sizes are available upon request.
