


Danygraig Road, Risca, Newport NP11 6DP T: 01633 612671 F: 01633 601280 E: bricksbm@marshalls.co.uk W: www.marshalls.co.uk/commercial

Scarborough Sunrise Facing Bricks

Date Created: 28/01/21



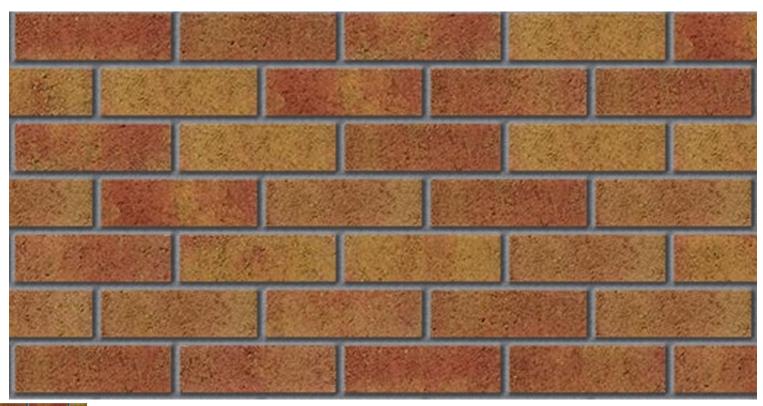

Not a traditional buff, nor a traditional red, the **Scarborough Sunrise** facing brick somehow sits between the two. The luminous shades in this brick are fitting to its name and have been chosen to provide a warm summery feel, which are emphasised by the slightly textured finish.

DESCRIPTION	
Manufacturing Process	Vibro-compacted pressed concrete
Base Raw Material	Concrete
Green Guide	A+
CE Marking/DOP	https://www.marshalls.co.uk/dop
NBS Specification	F10/215

T: 01633 612671 F: 01633 601280 E: bricksbm@marshalls.co.uk W: www.marshalls.co.uk/commercial

Scarborough Sunrise Facing Bricks

Date Created: 2	28/01/21
Date Createu. 2	20/01/21

PHYSICAL PROPERTIES	
Work Dimensions (mm)	215 x 100 x 65
Nominal Dimensions (mm)	215 x 100 x 65
Durability (Freeze-thaw)	Frost Resistant
Gross Density	1920kg/m³
Thermal Conductivity (K value)	1.11 W/mK (dry); 1.24 W/mK (@3%); 1.33 W/mK (@5%)
Compressive Strength (MPa)	>22.5N. Air dry
Water Vapour Permeability	5/15µ (Tabulated from EN 1745)
Shear Bond Strength	0.15N/mm² (Tabulated from EN 998-2: 2003, Annex C)
Dimensional Stability	<0.6 mm/m
SPECIFICATION	
Selection Of Mortar	It is recommended that the guidelines provided in BS EN 1996 - Design of Masonry Structures be taken into account before a final choice is made
Emission of Asbestos	No content
Reaction to fire	Euroclass A1
Dangerous Substances	No performance declared
Movement Joints	Spacing and width should be based on the guidelines provided in BS EN 1996 - Design of Masonry Structures
Moisture Movement	<0.45mm/m
APPLICATION	
Suitability	Eminently suitable for use below dpc in

Aggregate Concrete Masonry Units

SITE WORKS	
Installation	Avaliable on request
SUPPLY	
Packaging	Self-contained packs, non-returnable pallets with polythene stretch hood
No. units per pack	392
FURTHER INFORMATION	١
Cleaning & Maintenance	Cleaning & maintenance details are available on request
Efflorescence	Any product containing cement during its early life may exhibit a temporary white discolouration known as efflorescence. This is not a product fault and will gradually disappear with exposure to natural weathering and trafficking. Our manufacturing process involve the incorporation of advanced additives both within and on the surface of the brick. The amount of efflorescence emanating from the bricks can thus be classed as minimal
Weathering	It should be appreciated that with all products weathering and site conditions can cause shade variation to appear across the surface of individual units. This does not in any way affect the performance of the units and any such variation will diminish over a period of time as the product matures.
Product Evolution	The evolution of new product design is continuous and information is subject to change without notice. Customers should check with the supplier to ensure that they have the latest details Marshalls reserve the right to amend the technical information as deemed necessary and in accordance with the relevant national and international standards without notice
Contact Us	As many of these products are made to order for specific markets, please obtain further details on specification details, product availability, pack sizes and weights from your local Edenhall Sales Office, or alternatively call our Head Office