



# Marshall's

Landscape Protection

**Inspirational HVM Solutions**  
with inner strength and  
outer beauty

Keeping people safe... not scared®





# About Marshalls

Marshalls has been manufacturing hard landscaping materials for over 130 years and has become the leading supplier of products that create our urban environment. This has been achieved through progressive product innovation and demonstration of outstanding customer service levels. This privileged position will be sustained by continuous investment in the Marshalls brand, the products, and the people.



Proudly celebrating over 10 consecutive years as a Superbrand

At Marshalls, we work together as one team, guided by strong principles, to operate in the most ethical and sustainable way. **We do the right things, for the right reasons, in the right way. This is the Marshalls Way.**

## Act with Courage

We Act with Courage by taking responsibility for every action. We persevere and face things head on with a 'can do' attitude. We're proud of our depth of experience, but we're humble enough to never stop learning.

## Shape the Future

Operating in the most ethical and sustainable way is a commitment we make to our customers, partners, stakeholders and the communities where we operate. We keep this commitment by considering the long term impact of every single decision we make. We recognise that we can Shape the Future by putting people, communities and the environment first.

We don't take our lead from change, we initiate and embrace it.

## We Win Together

We Win Together by continuously developing our business and our Marshalls people. We strive to meet the needs and expectations of our customers and stakeholders. We break down boundaries by proactively proposing solutions, and we do this together with respect for each other.

## Inspire with Clear Purpose

We set clear expectations for those we work with and for ourselves. We Inspire with Purpose, letting our passion and pride shine! We're motivated by our own high standards to deliver market leading quality to our customers. We know that brilliance comes from every single one of our people being able to contribute to our vision of Creating Better Spaces and Futures for Everyone.



# Landscape Protection

Marshalls Landscape Protection offers a design led approach of Secured by Design Hostile Vehicle Mitigation security products enabling highly effective protection to blend seamlessly into urban landscape design; allowing architects, planners and designers to install security measures without instilling fear.

In most cases, crash-tested products are developed with minimal consideration given to the design, however Marshalls has flipped this on its head and taken a range of aesthetically designed street furniture products and incorporated protective RhinoGuard® technology within to create inner strength and outer beauty.



Our products are manufactured and tested to the latest security accreditations in the UK, with additional Street Furniture products sourced from Europe. From planters, seating and cycle stands, to litter bins, bollards and much more, the portfolio presents a comprehensive collection of creative HVM solutions available in a range of materials, from mild and stainless steel, natural stone, concrete and Ferrocast® to FSC®-certified timber and more.

Security products **don't need to compromise on the aesthetics** of a landscaping project.

We believe in the importance of creating **safe, attractive and inviting environments, and regenerating spaces where people want to spend time, where people feel safe, not scared.**



# Our approach to sustainability

We help to build safe, sustainable and beautiful spaces for everyone.

Our approach to sustainability is underpinned by our belief in doing the hard work in areas that are material to our business and our stakeholders, by working with leading organisations and by getting external validation.



**ISO50001**, which we achieved and maintained since 2015, enables organisations to establish the systems and processes necessary to continually improve energy performance

SBTi targets to **reduce Scope 1 and 2 greenhouse gas emissions** 40% per tonne of production by 2030



100% of our employees are paid at, or above, **the Living Wage Foundation level**



All our production plants now use **100% renewable energy**

We are proud to have been **FSC®-certified** since 2017.

All newly developed Marshalls and RhinoGuard® street furniture products that include wood elements, from now on will be **produced using FSC®-certified (FSC-C133609) hardwood and softwood timber** from well managed forests and other controlled sources.

Further detailed reviews are currently underway that will seek to replace any lumber with **FSC®-certified wood** wherever possible



We launched the highly regarded **Power of Logistics** programme to tackle Modern Slavery and led the sector in tackling the issue in the UK

We have eradicated child labour from Tier 1 of our Indian Sandstone supply chain – this is really important to us and our commitment to respecting **human rights** is central to our business



All our Marshalls branded Landscape Protection and Street Furniture products are **made in mainland Britain**



We achieved, and have since maintained, **ISO14001 Environmental Management** since 2000. The intention of **ISO14001** is to achieve a balance between the environment, society and the economy. This international standard provides organisations with a framework to **protect the environment** and respond to changing environmental conditions in balance with socio-economic needs



The concrete and natural stone we use to make our products are **recyclable**

We're proud to pay our fair share of tax – we've kept the **Fair Tax Mark** since 2015







Our developments in design, manufacture and technology negate the need for bulky and obtrusive security, enabling those who design our city spaces to think more creatively about how they can include Hostile Vehicle Mitigation within landscape design features.

Our environment impacts everything we do. **The better our environment, the better we can be.** Our aim is to help create a safe and aesthetically pleasing environment where people want to spend time.



Marshalls' integrated Landscape Protection approach involves the application of **creative thinking**, using our engineering and design know-how to create spaces that are **safer by design from the outset**.



# Contents

## Introduction

- 2** About Marshalls & Landscape Protection
- 4** Our approach to sustainability
- 8** Protective, aesthetically pleasing security

## Protective Seating

- 10** RhinoGuard® EOS
- 12** RhinoGuard® Igneo
- 14** RhinoGuard® Kirkos
- 18** RhinoGuard® Verso
- 20** RhinoGuard® RhinoBlok
- 22** RhinoGuard® Olimpo (seat/planter combined)
- 23** RhinoGuard® Universo

## Protective Planters

- 24** RhinoGuard® Large Giove
- 25** RhinoGuard® Small Giove
- 26** RhinoGuard® Square
- 27** RhinoGuard® Rectangle
- 28** RhinoGuard® Timber & Steel
- 29** RhinoGuard® RhinoBlok
- 30** RhinoGuard® Cristina
- 32** RhinoGuard® Classica 1220
- 33** RhinoGuard® Classica 1620

- 34** RhinoGuard® Saturno
- 35** RhinoGuard® Esile
- 36** RhinoGuard® Orione
- 37** RhinoGuard® Pegaso

## Protective Temporary solutions

- 38** RhinoGuard® Steel GateKeeper®
- 39** RhinoGuard® GateKeeper® additions
- 41** RhinoGuard® Concrete GateKeeper®

## Protective Post & Rail

- 42** RhinoGuard® Post & Rail

## Protective Bollards/Barriers

- 44** RhinoGuard® product options overview
- 46** RhinoGuard® Decorative Sleeves
- 47** RhinoGuard® Natural Stone Sleeves
- 48** RhinoGuard® Bespoke Sleeves
- 50** RhinoGuard® Super Shallow 100®
- 51** RhinoGuard® Ultra Shallow 50®
- 52** RhinoGuard® Beam
- 54** RhinoGuard® standard sleeve options
- 55** RhinoGuard® PAS 170 Bollards

## Protective Street Furniture

- 56** RhinoGuard® GEO

## Protective Automated Products

- 57** RhinoGuard® Automated Products

## Protective Modular Solutions

- 58** RhinoGuard® Redi-Rock™ Wall
- 59** RhinoGuard® Titan Kerb

## Additional Information

- 60** Aesthetically pleasing Landscape Protection is the way forward
- 62** Design and Engineering capability
- 63** Project Management
- 64** HVM security accreditations explained
- 66** International standards comparison
- 67** Security ratings explained



Ranges with this symbol are available in protective and non-protective options.



# Protective, aesthetically pleasing security

The terror threat posed to the public has evolved dramatically over the last few years. Large-scale, meticulously planned bomb attacks have given way to vehicle assaults that target pedestrians. Our products help protect and enhance our landscape environments, safeguarding people, buildings and the spaces they occupy from multiple levels of threat, whether they are accidental collisions, criminal ram-raids or terrorist attacks.

We believe that those in charge of specifying for security must assign a greater role to design aesthetics when it comes to choosing products to prevent vehicle attacks.

Concrete blocks and barricades have previously been common methods of security used to protect areas of high footfall, such as city centres, airports and sports stadiums. These approaches of security make spaces feel hostile and heavily defended.



Ideally, protective measures should be so well integrated into scenes that uninitiated passers-by don't realise they have been put in place for their protection, **keeping people safe... not scared®**

Inner strength  
and outer beauty





# RhinoGuard® EOS Seating

The multi-purpose RhinoGuard® protective EOS seat combines form, function and strength, offering not just a contemporary seating solution, but also security and resilience for a range of applications.

The seat frame has been successfully crash tested at 3 different scenarios using a 7.5 tonne vehicle travelling at 30mph, giving full reassurance of its inner strength.

Constructed using FSC®-certified Iroko timber and Ferrocast®, known for its resilience, a variety of looks can be achieved with a range of colour options, in order to suit the requirements of any scheme.



## Security specifications



V/7500(N2)/48/90:3.1/0.0  
Rear impact test

V/7500(N2)/48/90:0.0/0.0  
Front impact test

V/7500(N2)/48/90:2.7/0.0  
Gap impact test with bollard



Decorative



Timber

FSC®-certified  
Iroko timber

Ferrocast®

Seat ends available in  
any standard RAL colour.  
Bespoke design options  
are also available

Mild Steel

Front and back panels with  
the option of powder coating  
in any standard RAL colour



Original



Manhattan




Natural Stone




## Standard colours / materials


Ferrocast®

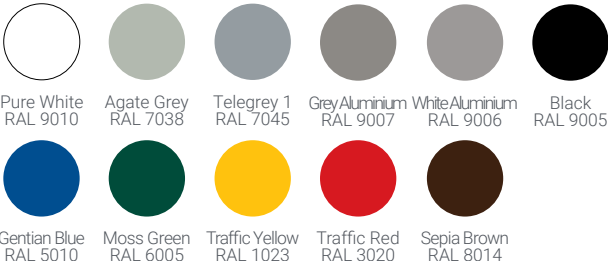

Natural Stone



Timber  
FSC®-certified



Mild steel





|   |                     |
|---|---------------------|
| Overall height above ground (mm)        | 887                 |
| Overall height inc. root (mm)           | 1237                |
| Seat height (mm)                        | 460                 |
| Length x width (mm)                     | 2166 x 678          |
| Foundation type                         | Reinforced concrete |
| Foundation length x width x height (mm) | 2400 x 1000 x 430   |
| Weight (kg)                             | 190                 |





Mild Steel

Front and back panels with the option of powder coating in any standard RAL colour

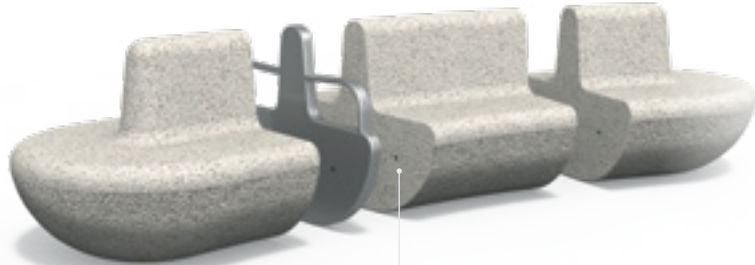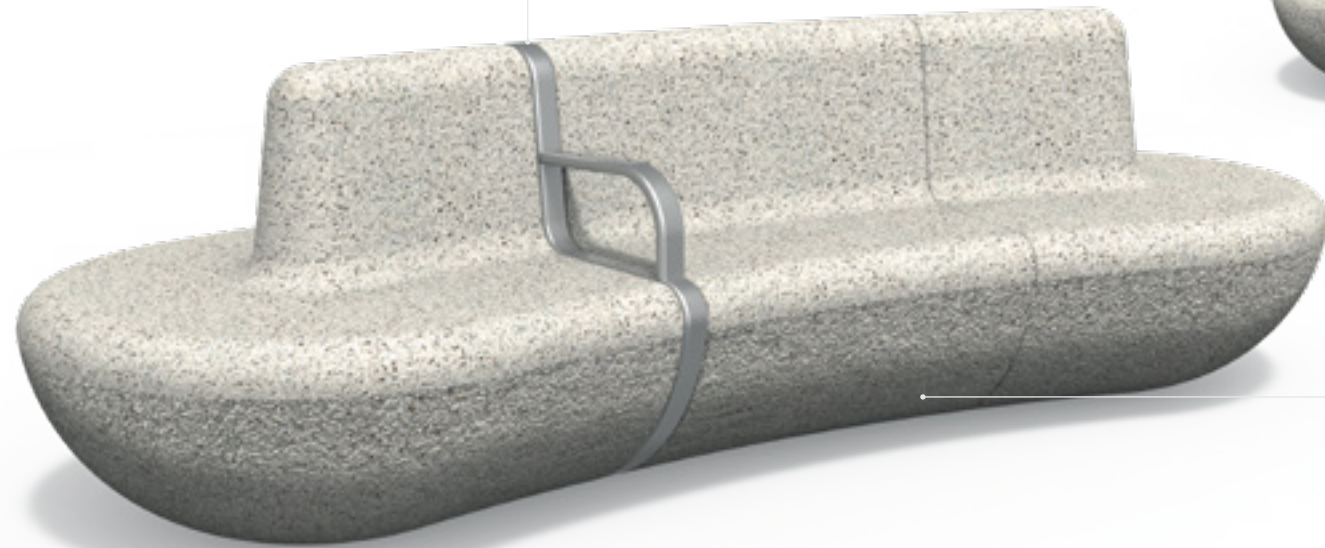

Completely modular, Igneo can be extended to the length you require by adding additional centre pieces, making it suitable for any space

Precast Concrete

Available in 4 colour variations with natural stone options available in the non-tested variation

|   |  |
|---|--|
| Overall height above ground (mm)        | 874  |
| Overall height inc. root (mm)           | 1159   |
| Seat height (mm)                        | 474  |
| Length x width (mm)                     | *3017 x 1240   |
| Foundation type                         | Reinforced concrete  |
| Foundation length x width x height (mm) | 2400 x 1600 x 500  |
| Weight (kg)                             | Ferrocasterm arm 21.5 / end section 1000 / middle section 1200 |

*\*Igneo can be extended to the length you require with 3017mm being the minimum length*

Standard colours / materials

Standard RAL powder coated colours



Pure White RAL 9010 Agate Grey RAL 7038 Telegrey 1 RAL 7045 Grey Aluminium RAL 9007



White Aluminium RAL 9006 Black RAL 9005 Gentian Blue RAL 5010 Moss Green RAL 6005



Traffic Yellow RAL 1023 Traffic Red RAL 3020 Sepia Brown RAL 8014

Precast Concrete



Silver Grey Anthracite Conservation Silver Grey Conservation Charcoal

# RhinoGuard® Igneo Seating

Vehicular-borne threats are a reality in many modern urban environments and with the RhinoGuard® Igneo Protective Seat, safety and security combined with a subtle visual appeal can be achieved.

Crash tested on two occasions, pinpointing different locations of the seat, Igneo can successfully withstand impact from a 7.5 tonne vehicle travelling at 40mph.

Manufactured using precast concrete, Igneo is available in 4 colour variations, all finished with an anti-graffiti coating. The optional armrests are manufactured using Ferrocasterm, known for its resilience. These are available in a range of RAL colours in order to achieve the look you desire.

Security specifications



7.5 TONNES  
PAS 68



V/7500(N2)/64/90:3.7/0.0  
Front impact test

V/7500(N2)/64/90:3.5/0.0  
Gap impact with bollard test






# RhinoGuard® Kirkos Seating

Manufactured in the UK, RhinoGuard® Kirkos consists of five standard solutions designed around a bollard centrepiece and provides a simple yet effective way of enhancing the environment whilst providing the appropriate level of defence required.

Whilst security must always be paramount, areas don't need to be transformed in to steel fortresses and with RhinoGuard® Kirkos, inclusive and aesthetically pleasing spaces can be created keeping people safe... not scared®.



Security specifications



7.2 TONNES

50

MPH

\*\*Various ratings available with a 7.2 tonne vehicle at 50mph being the strongest specification



Bollard


Choose from a selection of bollards to achieve your design and specification requirements

Mild Steel

with the option of powder coating

Timber

FSC®-certified Iroko hardwood

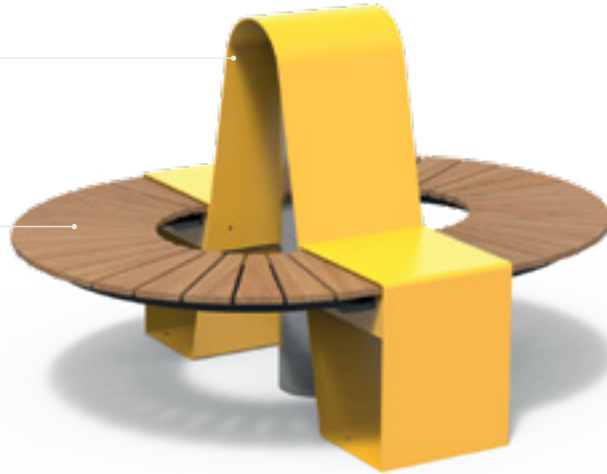

## Standard colours / materials

### Standard RAL & ADAPTA powder coated colours



Pure White  
RAL 9010



Agate Grey  
RAL 7038



Telegrey 1  
RAL 7045



Grey Aluminium  
RAL 9007



White Aluminium  
RAL 9006



Graphite Grey  
RAL 7024



Black  
RAL 9005



Sepia Brown  
RAL 8014



Corten  
(RT-8286-I)



Traffic Red  
RAL 3020



Carmine Red  
RAL 3002



Traffic Yellow  
RAL 1023



Yellow Green  
RAL 6018



May Green  
RAL 6017



Moss Green  
RAL 6005



Gentian Blue  
RAL 5010



Brilliant Blue  
RAL 5007



Sky Blue  
RAL 5015

Timber

FSC®-certified



Iroko



Mild steel



## RhinoGuard® Double Hoop Seat

|   |             |
|---|-------------|
| Overall height above ground (mm)        | 1090        |
| Overall height inc. root (mm)           | *Various    |
| Seat height (mm)                        | 500         |
| Length x width (mm)                     | 3130 x 1370 |
| Foundation type                         | *Various    |
| Foundation length x width x height (mm) | *Various    |
| Weight (kg)                             | 235         |

\*Dependent on core selection. See pages 42 - 43 for options


## RhinoGuard® Single Hoop Seat

|   |             |
|---|-------------|
| Overall height above ground (mm)        | 1090        |
| Overall height inc. root (mm)           | *Various    |
| Seat height (mm)                        | 500         |
| Length x width (mm)                     | 1740 x 1370 |
| Foundation type                         | *Various    |
| Foundation length x width x height (mm) | *Various    |
| Weight (kg)                             | 110         |

\*Dependent on core selection. See pages 42 - 43 for options



# RhinoGuard® Kirkos Seating

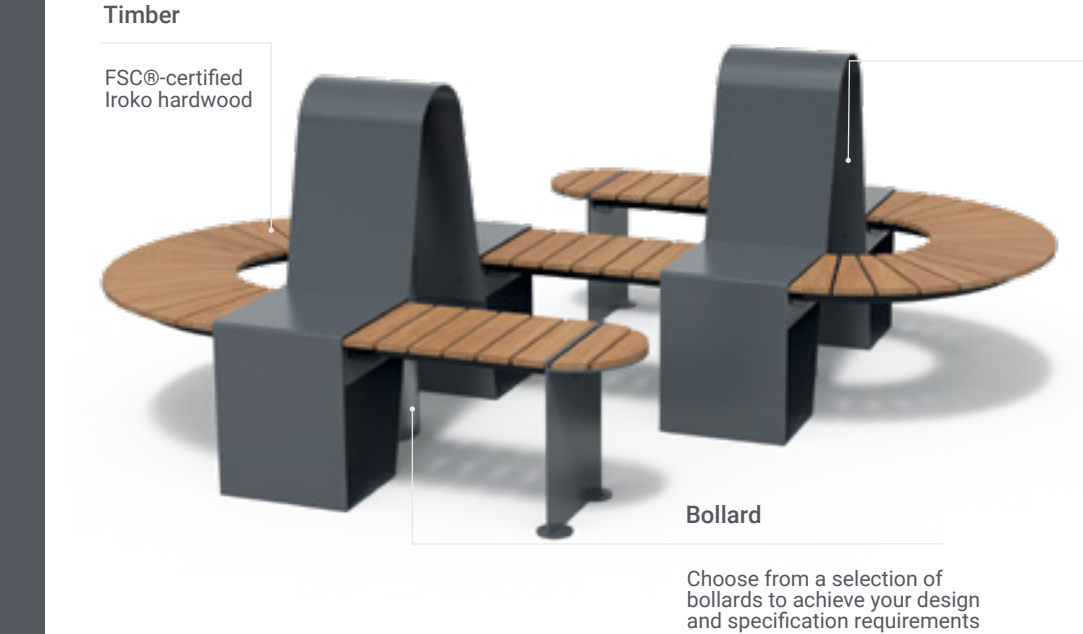

|   |             |
|---|-------------|
| RhinoGuard® Twist Seat                                      |             |
| Overall height above ground (mm)                            | 1090        |
| Overall height inc. root (mm)                               | *Various    |
| Seat height (mm)  | 500         |
| Length x width (mm)   | 2730 x 2320 |
| Foundation type   | *Various    |
| Foundation length x width x height (mm)                     | *Various    |
| Weight (kg)   | 240         |
| *Dependent on core selection. See pages 42 - 43 for options |             |

Mild Steel

with the option of powder coating

Standard colours / materials

Standard RAL & ADAPTA powder coated colours

|   |   |   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|---|
|  |  |  |  |  |  |  |  |  |
| Pure White<br>RAL 9010  | Agate Grey<br>RAL 7038  | Telegrey 1<br>RAL 7045  | Grey Aluminium<br>RAL 9007  | White Aluminium<br>RAL 9006   | Graphite Grey<br>RAL 7024   | Black<br>RAL 9005   | Sepia Brown<br>RAL 8014   | Corten<br>(RT-8286-I)   |
|  |  |  |  |  |  |  |  |  |
| Traffic Red<br>RAL 3020   | Carmine Red<br>RAL 3002   | Traffic Yellow<br>RAL 1023  | Yellow Green<br>RAL 6018  | May Green<br>RAL 6017   | Moss Green<br>RAL 6005  | Gentian Blue<br>RAL 5010  | Brilliant Blue<br>RAL 5007  | Sky Blue<br>RAL 5015  |

|   |            |
|---|------------|
| RhinoGuard® Planter   |            |
| Overall height above ground (mm)                            | 1200       |
| Overall height inc. root (mm)                               | *Various   |
| Length x width (mm)   | 1945 x 365 |
| Foundation type   | *Various   |
| Foundation length x width x height (mm)                     | *Various   |
| Weight (kg)   | 195        |
| *Dependent on core selection. See pages 42 - 43 for options |            |



|   |             |
|---|-------------|
| RhinoGuard® Double Planter Seat                             |             |
| Overall height above ground (mm)                            | 1200        |
| Overall height inc. root (mm)                               | *Various    |
| Seat height (mm)  | 500         |
| Length x width (mm)   | 2766 x 1350 |
| Foundation type   | *Various    |
| Foundation length x width x height (mm)                     | *Various    |
| Weight (kg)   | 310         |
| *Dependent on core selection. See pages 42 - 43 for options |             |








Concrete

City Grey  
option shown

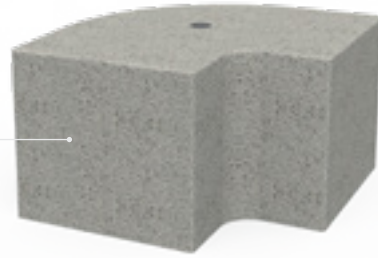

Verso  
90° Block



Verso  
1800 Curve Block



Verso  
600 Block



Verso  
1200 Block



Verso  
1200 Block Planter

Standard colours / materials

Base materials

Concrete

City Grey

Silver Grey

Anthracite Grey

Additional seating & planting elements

Red Grandis

FSC  
www.fsc.org  
FSC® C133669  
The mark of responsible forestry

Timber FSC®-certified

Wood Plastic Composite

Black

Slate Grey

Pebble Grey

Light Brown

Dark Brown

Powder coat options

Corten effect (ADAPTA)

Any RAL

Option of powder coating in a range of RALs to suit your specification

|                               | 90° Block           |                 | 600 Block      |                 | 1200 Block      |                  |                   | 1800 Curve Block             |                  |                   | 1200 Block Planter |
|-------------------------------|---------------------|-----------------|----------------|-----------------|-----------------|------------------|-------------------|------------------------------|------------------|-------------------|--------------------|
| Rating option availability    | Unrated             | 15/30*          | Unrated        | 15/30*          | Unrated         | 15/30*           | 72/30*            | Unrated                      | 15/30*           | 72/30*            | Unrated            |
| Block weight excl. cores (kg) | 517.5               |                 | 500            |                 | 1000            |                  |                   | 1591                         |                  |                   | 106                |
| Dimensions (LxWxH - mm)       | 900x900x600         |                 | 600x600x600    |                 | 1200x600x600    |                  |                   | 2093x797x600 (max dimension) |                  |                   | 1200x600x600       |
| Height above ground (mm)      | 550                 |                 |                |                 |                 |                  |                   |                              |                  |                   |                    |
| Foundations (LxWxH - mm)      | 900x900<br>x50      | 900x900<br>x300 | 600x600<br>x50 | 600x600<br>x300 | 1200x600<br>x50 | 1200x600<br>x300 | 1800x1400<br>x300 | 2093x797<br>x50              | 2093x797<br>x300 | 2093x1800<br>x300 | N/A                |
| Fixing method                 | Sub-surface mounted |                 |                |                 |                 |                  |                   |                              |                  |                   |                    |

*\*15/30 - capable of withstanding a 1.5 tonne vehicle travelling at 30mph. 72/30 - capable of withstanding a 7.2 tonne vehicle travelling at 30mph*

Optional additions for the 1200 blocks to create a range of seating elements:



1200 Bench top



1200 Double Bench top



1200 Seat top

Arm rest options for seating

No arms

End arms

Full arms

Plank options

Choose from FSC®-certified Iroko timber or Wood Plastic Composite

1200 Block-mounted Planter

\*Seating additions and arm rests only available on the 1200 block

|  |                         | 1200 Bench top | 1200 Double Bench top | 1200 Seat top | 1200 Block-mounted Planter |
|--|-------------------------|----------------|-----------------------|---------------|----------------------------|
| Weight (timber or WPC addition only - kg)    |                         | 30             | 50                    | 40            | 185 (140lt capacity)       |
| Timber/ WPC addition dimensions (LxWxH - mm) |                         | 1200x440 x292  | 1200x694 x292         | 1200x499 x664 | 1200x693 x606              |
| Heights (mm)                                 | Seat (above ground)     | 967            |                       |               | N/A                        |
|  | Armrest (above seat)    | 180            |                       |               | N/A                        |
|  | Backrest (above ground) | N/A            |                       | 967           | N/A                        |
|  | Planter (above ground)  | N/A            |                       |               | 909                        |

# RhinoGuard® Verso Seating

Verso, a fully crash tested range, allows for a mix of protective and non-protective seating and planter elements to be used in unison across a single project.

The versatile shape and design of the modules allows for unlimited configurations to suit any specification. The modules can also be used as standalone pieces.

The low height above ground means that spaces can be enjoyed without hindering the eye-line and view of surrounding landscapes.

The precast concrete blocks are available with additional seating and planter elements, manufactured using FSC®-certified timber or 100% recyclable Wood Plastic Composite.

Security specifications

1.5-7.2 TONNES  
IWA 14.1

V/7200(N2A)/48/90:3.7  
V/1500(M1)/48/90: 5.4





RhinoBlok double seat 1000 with end bench 1000

Timber

FSC®-certified Iroko timber

Concrete

Silver Grey option

Standard colours / materials

Concrete



Silver Grey



Mid Grey

Timber FSC®-certified



Iroko



RhinoGuard® RhinoBlok

|   |                   |
|---|-------------------|
| Overall height above ground (mm)        | 580               |
| Overall height inc. root (mm)           | 710               |
| Seat height (mm)                        | 580               |
| Length x width (mm)                     | 1600 x 1000       |
| Foundation type                         | Precast concrete  |
| Foundation length x width x height (mm) | 2120 x 1520 x 200 |
| Weight (kg)                             | 2500              |


Standard Configurations




RhinoBlok




RhinoBlok Timber top



RhinoBlok Timber end bench 1000




RhinoBlok Timber single bench 1600




RhinoBlok Timber double bench 1600




RhinoBlok Timber end seat 1000



RhinoBlok Timber triple bench 1000



RhinoBlok Timber single seat 1600



RhinoBlok Timber double seat 1600

Create your desired configuration using a variety of seating elements



RhinoBlok Timber seat 1600



RhinoBlok Timber bench 1600



RhinoBlok Timber seat 1000



RhinoBlok Timber bench 1000



RhinoBlok Timber top



RhinoBlok

# RhinoGuard® RhinoBlok Seating

Providing inner strength and outer beauty, the RhinoGuard® RhinoBlok seating is available with a choice of timber cladded seat and bench variations, providing the perfect solution to protect people, places and infrastructure without compromising on the appearance of the space.

The Blok can also be used as the central core of a planter, offering the perfect addition to compliment the range.

Security specifications



7.2 TONNES  
IWA 14.1

40 MPH

V/7200(N2A)/64/90:19.3

RhinoGuard® RhinoBlok Timber Double Bench 1600

RhinoGuard® RhinoBlok Planter



# RhinoGuard® Olimpo Seating

Olimpo combines functionality and beauty. Manufactured using reconstituted natural marble stones or white granite, the seat and planter combined is available with a polished or bush hammered finish for a glossy or rough appearance, providing the perfect solution for classic and modern urban environments.

Available with a choice of security ratings to suit the requirement, Olimpo is offered with or without the back rest element and in a range of colour options, allowing a range of aesthetic design options to be achieved.

Security specifications



1.5-7.2

TONNES

50

MPH

\*\*Various ratings available with a 7.2 tonne vehicle at 50mph being the strongest specification

This is an engineered solution based around our current offering of tested products

Available without the 360° backrest

Standard colours / materials

Precious stone

Bianco Carrara

Botticino

Giallo Mori

Rosso Verona

Veneziano

Verde Alpi

Porfido

Nero Erbano

Concrete

White Granite

Grey Concrete

|   |          |
|---|----------|
| Overall height above ground (mm)        | 880      |
| Overall height inc. root (mm)           | *Various |
| Seat height (mm)                        | 480      |
| Length x width Ø (mm)                   | 2500     |
| Foundation type                         | *Various |
| Foundation length x width x height (mm) | *Various |
| Weight (kg)                             | 3550     |

*\*Dependent on core selection. See pages 42 - 43 for options*

# RhinoGuard® Universo Seating

With its sculptured, circular form and unique style, Universo stands out in any environment. Manufactured using sandblasted natural stone or concrete, the organic seating elements can be used singularly or combined to create a beautiful and creative space.

Security specifications



1.5-7.2

TONNES

50

MPH

\*\*Various ratings available with a 7.2 tonne vehicle at 50mph being the strongest specification

This is an engineered solution based around our current offering of tested products

Standard colours / materials

Precious stone

Bianco Carrara

Botticino

Giallo Mori

Rosso Verona

Veneziano

Verde Alpi

Porfido

Nero Erbano

Concrete

White Granite

Grey Concrete

|   |          |
|---|----------|
| Overall height above ground (mm)        | 850      |
| Overall height inc. root (mm)           | *Various |
| Seat height (mm)                        | 424      |
| Length x width Ø (mm)                   | 1900     |
| Foundation type                         | *Various |
| Foundation length x width x height (mm) | *Various |
| Weight (kg)                             | 2360     |

*\*Dependent on core selection. See pages 42 - 43 for options*

Protective Seating

Landscape Protection

marshalls.co.uk/landscapeprotection

23



# RhinoGuard® Large Giove Planter

The RhinoGuard® Giove planter is available in two sizes and provides an elegant HVM solution for introducing planting in to the public realm.

The planters are cast from a mix of concrete and fine Italian marble aggregates sourced from Italy. The use of high-quality natural marble ensures long term colour consistency. Each planter can either be polished during manufacture to leave a smooth surface, or bush hammered for a rough appearance.

## Security specifications



V/7500(N2)/64/90:0.0/0.0  
Single Frame impact test

V/7500(N3)/80/90:1.7/0.0  
Single Frame impact test

V/7500(N3)/80/90:3.8/35.5  
Complete Planter test

With its 1,225 litre capacity, the large Giove planter has been designed to accommodate the root ball of a tree.



All visible surfaces are covered with a transparent anti-decay coating and upon request an anti-graffiti coating is also available

## Standard colours / materials

### Precious stone



Bianco Carrara



Botticino



Giallo Mori



Rosso Verona



Veneziano



Verde Alpi



Porfido



Nero Erzano

### Concrete



White Granite

|   |          |
|---|----------|
| Overall height above ground (mm)        | 1100     |
| Overall height inc. root (mm)           | *Various |
| Length x width Ø (mm)                   | 1900     |
| Foundation type                         | *Various |
| Foundation length x width x height (mm) | *Various |
| Weight (kg)                             | 3005     |

*\*Dependent on core selection. See pages 42 - 43 for options*

# RhinoGuard® Small Giove Planter

The RhinoGuard® Small Giove is the younger sister of the Large Giove planter. Scaled down in size, these can be used alongside one another to create a variety of layouts or individually to add a protective but aesthetically pleasing feature to any urban landscape.

The strength and durability of the material ensures performance in all climates.

## Security specifications



**\*\*Various ratings available with a 7.2 tonne vehicle at 40mph being the strongest specification**  
This is an engineered solution based around our current offering of tested products



All visible surfaces are covered with a transparent anti-decay coating and upon request an anti-graffiti coating is also available

## Standard colours / materials

### Precious stone



Bianco Carrara



Botticino



Giallo Mori



Rosso Verona



Veneziano



Verde Alpi



Porfido



Nero Erzano

### Concrete



White Granite



Grey Concrete

|   |          |
|---|----------|
| Overall height above ground (mm)        | 735      |
| Overall height inc. root (mm)           | *Various |
| Length x width Ø (mm)                   | 1500     |
| Foundation type                         | *Various |
| Foundation length x width x height (mm) | *Various |
| Weight (kg)                             | 1500     |

*\*Dependent on core selection. See pages 42 - 43 for options*



# RhinoGuard® Square Planter

Like the RhinoGuard® Rectangle planter, the square variant provides a durable and aesthetically pleasing Hostile Vehicle Mitigation solution. Available in a range of colour variations and finishes, the planter has a solid construction and requires little maintenance.

## Security specifications



1.5-7.2  
TONNES

50









MPH

\*\*Various ratings available with a 7.2 tonne vehicle at 50mph being the strongest specification  
This is an engineered solution based around our current offering of tested products





### Standard colours / materials

Precious stone



Concrete



Bianco Carrara

Botticino

Giallo Mori

Rosso Verona

Veneziano

Verde Alpi

Porfido

Nero Erbano

White Granite

Grey Concrete

|   |             |
|---|-------------|
| Overall height above ground (mm)        | 950         |
| Overall height inc. root (mm)           | *Various    |
| Length x width (mm)                     | 1100 x 1100 |
| Foundation type                         | *Various    |
| Foundation length x width x height (mm) | *Various    |
| Weight (kg)                             | 977         |

*\*Dependent on core selection. See pages 42 - 43 for options*

# RhinoGuard® Rectangle Planter

The RhinoGuard® Rectangle planter provides an economical and flexible way to enhance an urban landscape with natural elements whilst the durability and strength of the material ensures performance in all climates. The robust geometric construction allows the planter to be strategically placed to restrict vehicular access and guide pedestrian flow, providing a practical yet decorative addition to any landscape project.

## Security specifications



1.5-7.2  
TONNES

50









MPH

\*\*Various ratings available with a 7.2 tonne vehicle at 50mph being the strongest specification  
This is an engineered solution based around our current offering of tested products





### Standard colours / materials

Precious stone



Concrete



Bianco Carrara

Botticino

Giallo Mori

Rosso Verona

Veneziano

Verde Alpi

Porfido

Nero Erbano

White Granite

Grey Concrete

|   |            |
|---|------------|
| Overall height above ground (mm)        | 950        |
| Overall height inc. root (mm)           | *Various   |
| Length x width (mm)                     | 1800 x 700 |
| Foundation type                         | *Various   |
| Foundation length x width x height (mm) | *Various   |
| Weight (kg)                             | 1265       |

*\*Dependent on core selection. See pages 42 - 43 for options*



# RhinoGuard® Timber & Steel Planter

The RhinoGuard® square planters provide a simple specification consisting of a mild steel frame with the option of hardwood or steel panels making this the ideal solution for schemes where quality, design and durability are key requirements.

The heavy-duty steel frame supports are fully galvanised against rust and are available in a range of powder coated colour variations to suit the design requirements.

## Security specifications



7.2  
TONNES  
IWA 14.1

40  
MPH

V/7200(N2A)/64/90:19.3

\*\*Various ratings available with a 7.2 tonne vehicle at 40mph being the strongest specification

This is an engineered solution based around our current offering of tested products



### Mild steel

Galvanised mild steel frame. Powder coated to any standard RAL - see page 13

### Timber

FSC®-certified Iroko timber

### Aluminium

Aluminium infill panels. Powder coated to any standard RAL - see page 13

### Standard colours / materials

Timber FSC®-certified



Iroko



The mark of responsible forestry

Mild steel



|                                  |     |
|----------------------------------|-----|
| Overall height above ground (mm) | 950 |
|----------------------------------|-----|

|                               |          |
|-------------------------------|----------|
| Overall height inc. root (mm) | *Various |
|-------------------------------|----------|

|                     |      |
|---------------------|------|
| Length x width (mm) | 1900 |
|---------------------|------|

|                 |          |
|-----------------|----------|
| Foundation type | *Various |
|-----------------|----------|

|   |          |
|---|----------|
| Foundation length x width x height (mm) | *Various |
|---|----------|

|             |        |     |     |     |
|-------------|--------|-----|-----|-----|
| Weight (kg) | Timber | 235 | 220 | 295 |
|             | Steel  | 240 | 225 | 300 |

\*Dependent on core selection. See pages 42 - 43 for options

# RhinoGuard® RhinoBlok Planter

Providing inner strength and outer beauty, the RhinoGuard® RhinoBlok Planter gives a concrete block a face-lift. Using the HVM RhinoBlok as the core, the planter complements the RhinoBlok seating range shown on pages 16-17.

## Security specifications



7.2  
TONNES  
IWA 14.1

40  
MPH

V/7200(N2A)/64/90:19.3



### Mild steel

Galvanised mild steel frame. Powder coated to any standard RAL - see page 13

### Aluminium

Aluminium infill panels. Powder coated to any standard RAL - see page 13

### Timber Planter Sleeve

Timber  
FSC®-certified Iroko timber

### Mild steel

Galvanised mild steel frame. Powder coated to any standard RAL - see page 13

Mild Steel  
Planter Sleeve

### Standard colours / materials

Timber FSC®-certified



Iroko



The mark of responsible forestry

Mild steel



|                              |                                |                                 |
|------------------------------|--------------------------------|---------------------------------|
|                              | RhinoBlok Steel Planter Sleeve | RhinoBlok Timber Planter Sleeve |
| Length x width x height (mm) | 1800 x 1200 x 1000             |                                 |
| Weight (kg)                  | 300                            | 295                             |

For RhinoGuard® RhinoBlok specification details or for further information on the RhinoBlok seating options please see page 16-17



# RhinoGuard® Cristina Planter

The Cristina planter is composed of a base and two elements which are divided by a central band of copper or stainless steel which follows the full circumference of the planter.

Manufactured from precious stone or concrete, Cristina is available in a range of security ratings, providing inner strength and outer beauty and will enhance the aesthetics of any environment.

## Security specifications



1.5-7.2  
TONNES

40

MPH

\*\*Various ratings available with a 7.2 tonne vehicle at 40mph being the strongest specification  
This is an engineered solution based around our current offering of tested products



Surfaces can be polished for a shiny finish, or sandblasted or bush hammered for a rough appearance




Central band is available in copper or stainless steel with a satin finish treatment



All visible surfaces are covered with a transparent anti-decay coating and upon request an anti-graffiti coating is also available

Reinforced and fitted with lifting eyes for ease of handling

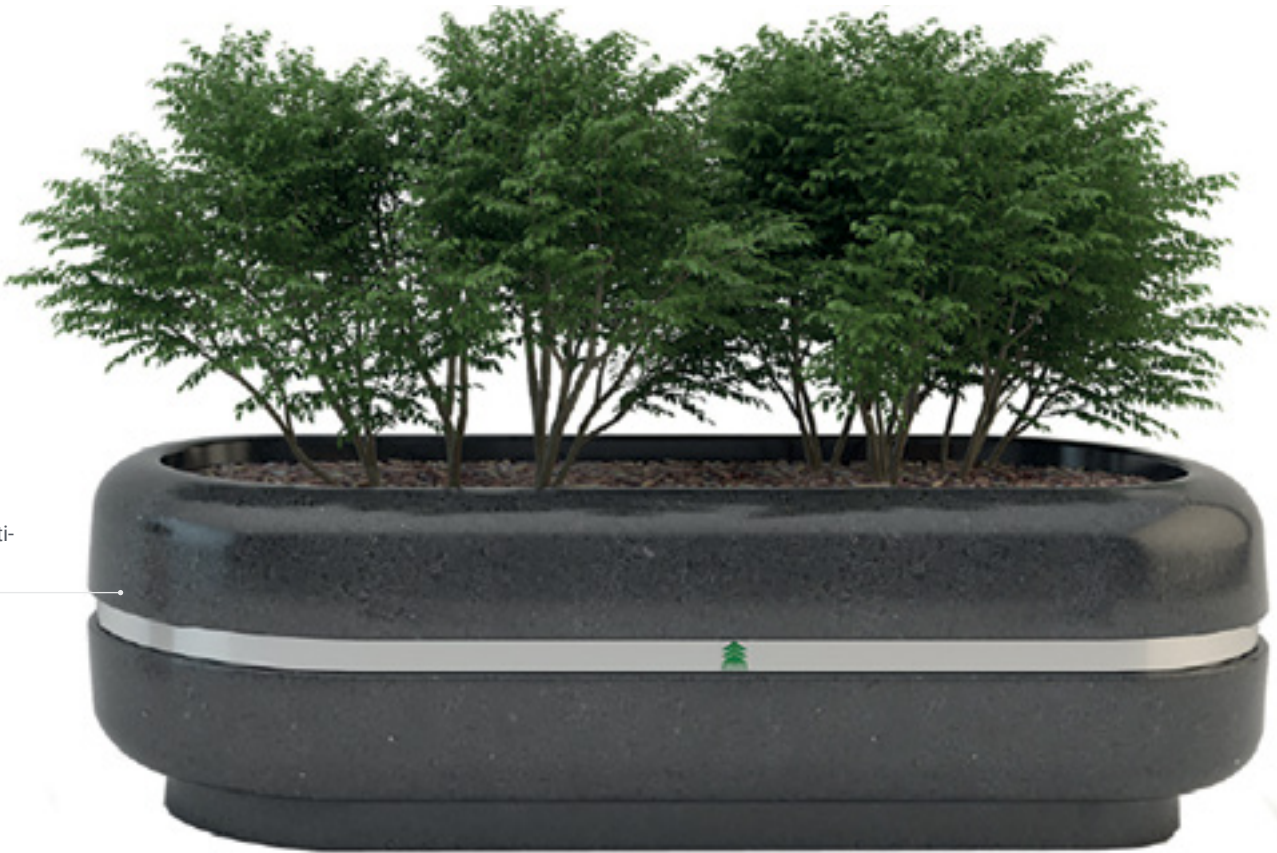

|   |            |
|---|------------|
| Overall height above ground (mm)        | 600        |
| Overall height inc. root (mm)           | *Various   |
| Length x width (mm)                     | 2000 x 820 |
| Foundation type                         | *Various   |
| Foundation length x width x height (mm) | *Various   |
| Weight (kg)                             | 880        |

*\*Dependent on core selection. See pages 42 - 43 for options*

## Standard colours / materials

### Precious stone



Bianco Carrara



Botticino



Giallo Mori



Rosso Verona



Veneziano



Verde Alpi



Porfido



Nero Erbano

### Concrete



White Granite



Grey Concrete



# RhinoGuard® Classica 1220 Planter

Classica is available in two sizes - the 300 litre Classica 1220 and the 600 litre Classica 1620.

Manufactured from precious stone or concrete, the versatile, circular form of each planter is enhanced with a band of copper or stainless steel in the central groove which follows the full circumference of the planter.

## Security specifications



1.5-7.2  
TONNES

40

MPH

\*\*Various ratings available with a 7.2 tonne vehicle at 40mph being the strongest specification  
This is an engineered solution based around our current offering of tested products

Surfaces can be polished for a shiny finish, or sandblasted or bush hammered for a rough appearance




All visible surfaces are covered with a transparent anti-decay coating and upon request an anti-graffiti coating is also available




### Standard colours / materials

#### Precious stone



#### Concrete



|   |          |
|---|----------|
| Overall height above ground (mm)        | 650      |
| Overall height inc. root (mm)           | *Various |
| Length x width Ø (mm)                   | 1220     |
| Foundation type                         | *Various |
| Foundation length x width x height (mm) | *Various |
| Weight (kg)                             | 910      |

*\*Dependent on core selection. See pages 42 - 43 for options*

# RhinoGuard® Classica 1620 Planter

Manufactured from precious stone or concrete, the Classica planters are available in a range of security ratings, providing inner strength and outer beauty and will enhance the aesthetics of any environment.

## Security specifications



1.5-7.2  
TONNES

40

MPH

\*\*Various ratings available with a 7.2 tonne vehicle at 40mph being the strongest specification  
This is an engineered solution based around our current offering of tested products




Central band is available in copper or stainless steel with a satin finish treatment



### Standard colours / materials

#### Precious stone



#### Concrete



|   |          |
|---|----------|
| Overall height above ground (mm)        | 650      |
| Overall height inc. root (mm)           | *Various |
| Length x width Ø (mm)                   | 1620     |
| Foundation type                         | *Various |
| Foundation length x width x height (mm) | *Various |
| Weight (kg)                             | 1468     |

*\*Dependent on core selection. See pages 42 - 43 for options*



# RhinoGuard<sup>®</sup> Saturno Planter

Available in precious stone or concrete in a range of conglomerate colour variations, Saturno provides a beautiful whilst functional Hostile Vehicle Mitigation solution that doesn't compromise on the aesthetics of a landscaping project.

Surfaces can be polished for a shiny finish, or sandblasted or bush hammered for a rough appearance

## Security specifications



\*\*Various ratings available with a 7.2 tonne vehicle at 50mph being the strongest specification  
This is an engineered solution based around our current offering of tested products



All visible surfaces are covered with a transparent anti-decay coating and upon request an anti-graffiti coating is also available

## Standard colours / materials

### Precious stone



Bianco Carrara



Botticino



Giallo Mori



Rosso Verona



Veneziano



Verde Alpi



Porfido



Nero Erbano

### Concrete



White Granite

|   |          |
|---|----------|
| Overall height above ground (mm)        | 1198     |
| Overall height inc. root (mm)           | *Various |
| Length x width Ø (mm)                   | 1495     |
| Foundation type                         | *Various |
| Foundation length x width x height (mm) | *Various |
| Weight (kg)                             | 2393     |

\*Dependent on core selection. See pages 42 - 43 for options

# RhinoGuard<sup>®</sup> Esile Planter

The tapered profile of the Esile planter provides an elegant and contemporary Hostile Vehicle Mitigation solution, facilitating its integration in any environment.

Manufactured with Ultra High Performance Concrete which has been developed in recent decades for its exceptional properties of strength and durability, the Esile planter is freeze resistant and abrasion resistant, offering reduced maintenance and an extended life span.

Esile is available in a range of subtle or outgoing colour options to create a cheerful and vibrant atmosphere.

## Security specifications



\*\*Various ratings available with a 7.2 tonne vehicle at 40mph being the strongest specification  
This is an engineered solution based around our current offering of tested products



All visible surfaces are covered with a transparent anti-decay coating and upon request an anti-graffiti coating is also available

## Standard colours / materials

### Ultratense concrete



UTC1



UTC2



UTC3



UTC4



UTC5



UTC6



UTC7

|   |          |
|---|----------|
| Overall height above ground (mm)        | 900      |
| Overall height inc. root (mm)           | *Various |
| Length x width Ø (mm)                   | 677      |
| Foundation type                         | *Various |
| Foundation length x width x height (mm) | *Various |
| Weight (kg)                             | 279      |

\*Dependent on core selection. See pages 42 - 43 for options



# RhinoGuard® Orione Planter

The Orione planter is the perfect solution to bring timeless style in to urban streetscapes, retail centres and large foyers. Equipped with an internal stainless steel flower vase, the Hostile Vehicle Mitigation planter is offered in precious stone or concrete in various conglomerate shades.





1.5-7.2  
TONNES

40

MPH

**Security specifications**

\*\*Various ratings available with a 7.2 tonne vehicle at 40mph being the strongest specification  
This is an engineered solution based around our current offering of tested products



All visible surfaces are covered with a transparent anti-decay coating and upon request an anti-graffiti coating is also available



Standard colours / materials

Precious stone



Bianco Carrara



Botticino



Giallo Mori



Rosso Verona



Veneziano



Verde Alpi



Porfido



Nero Erbano

Concrete



White Granite

|   |          |
|---|----------|
| Overall height above ground (mm)        | 816      |
| Overall height inc. root (mm)           | *Various |
| Length x width Ø (mm)                   | 520      |
| Foundation type                         | *Various |
| Foundation length x width x height (mm) | *Various |
| Weight (kg)                             | 242      |

\*Dependent on core selection. See pages 42 - 43 for options

# RhinoGuard® Pegaso Planter

Pegaso is a cylindrical shaped planter available in conglomerate precious stone or concrete and is available in a variety of colour options.

Its softly curved profile offers a timeless design for both public and private spaces. Available in a range of security ratings, the planter provides inner strength and outer beauty and will enhance the aesthetics of any environment.





1.5-7.2  
TONNES

40

MPH

**Security specifications**

\*\*Various ratings available with a 7.2 tonne vehicle at 40mph being the strongest specification  
This is an engineered solution based around our current offering of tested products



All visible surfaces are covered with a transparent anti-decay coating and upon request an anti-graffiti coating is also available



Standard colours / materials

Precious stone



Bianco Carrara



Botticino



Giallo Mori



Rosso Verona



Veneziano



Verde Alpi



Porfido



Nero Erbano

Concrete



White Granite

|   |          |
|---|----------|
| Overall height above ground (mm)        | 915      |
| Overall height inc. root (mm)           | *Various |
| Length x width Ø (mm)                   | 640      |
| Foundation type                         | *Various |
| Foundation length x width x height (mm) | *Various |
| Weight (kg)                             | 374      |

\*Dependent on core selection. See pages 42 - 43 for options



# RhinoGuard® Steel GateKeeper®

The RhinoGuard® Steel GateKeeper® provides temporary protective measures for a number of applications such as Christmas markets or sporting events.

The steel variation has been successfully crash tested to IWA 14.1, providing protection against vehicles up to 2.5 tonnes travelling up to 30mph. The tested solution is pedestrian permeable, with vehicle access points and requires no anchorage in any form and can be quickly deployed across all surfaces without relying on kerbs or structural aids.

GateKeeper® is fully galvanised to protect against corrosion and is available with the option of power coating and branded customisation providing an ideal solution for use on busy high streets or at events

### Security specifications



2.5

TONNES

IWA 14.1

30

MPH


V2500(N1G)/48/90:5.2 – 11 unit crash test  
V2500(N1G)/48/90:11.7 – 5 unit crash test



### Brick GateKeeper® Individual Unit Design

A range of standard design options are available. Branded customisation also available


### GateKeeper® 'Original' Shroud Design

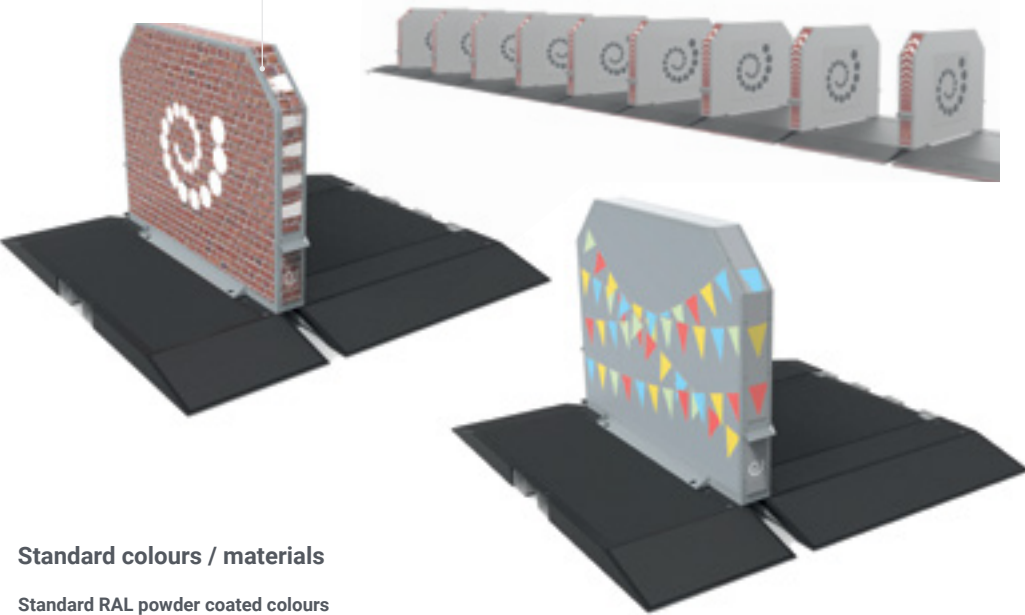


### Festival GateKeeper® Individual Unit Design

### Standard colours / materials


#### Standard RAL powder coated colours




Pure White  
RAL 9010




Agate Grey  
RAL 7038




Telegrey 1  
RAL 7045




Grey Aluminium  
RAL 9007




White Aluminium  
RAL 9006




Gentian Blue  
RAL 5010




Moss Green  
RAL 6005




Traffic Yellow  
RAL 1023



Traffic Red  
RAL 3020



Sepia Brown  
RAL 8014



Black  
RAL 9005


### RhinoGuard® Individual GateKeeper® Unit

|  |                    |
|--|--------------------|
| Individual unit length x width x height (mm) | 1265 x 1876 x 1093 |
| Individual unit weight (kg)                  | 245                |

# RhinoGuard® GateKeeper®



### GateKeeper® Docking Station

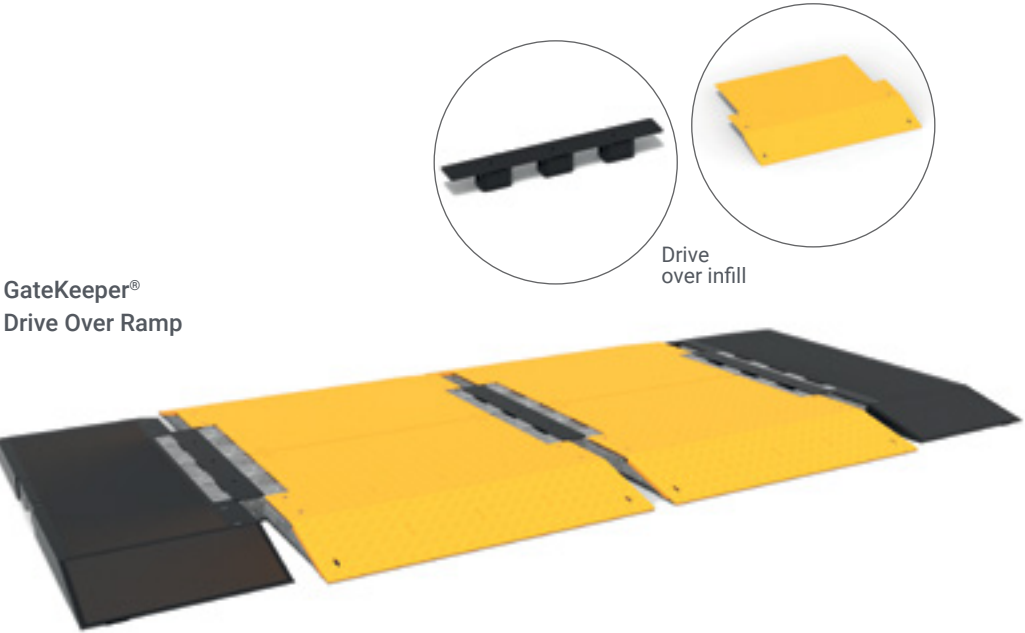

### GateKeeper® Drive Over Ramp

For installations requiring planned vehicular access, the dedicated GateKeeper® drive over ramps should be used. Fitting easily to the standard GateKeeper® base units, drive over ramps can support vehicles weighing up to 40 tonnes and can be used with or without protective uprights and shrouds in place. With uprights removed, drive over infill units can be fitted to eliminate potential trip hazards.

### RhinoGuard® GateKeeper® Drive Over Ramp

|  |                 |
|--|-----------------|
| Individual unit length x width x height (mm) | 990 x 88 x 1180 |
| Individual unit weight (kg)                  | 54              |



For installations where the uprights and shrouds are to be removed, the docking station provides safe and secure storage for the removed items.

The docking station is a free standing unit which can be positioned alongside the GateKeeper® assembly.

### RhinoGuard® GateKeeper® Docking Station


|  |                 |
|--|-----------------|
| Individual unit length x width x height (mm) | 852 x 83 x 1260 |
| Individual unit weight (kg)                  | 85              |



# RhinoGuard® GateKeeper®



GateKeeper® Kerb Transition

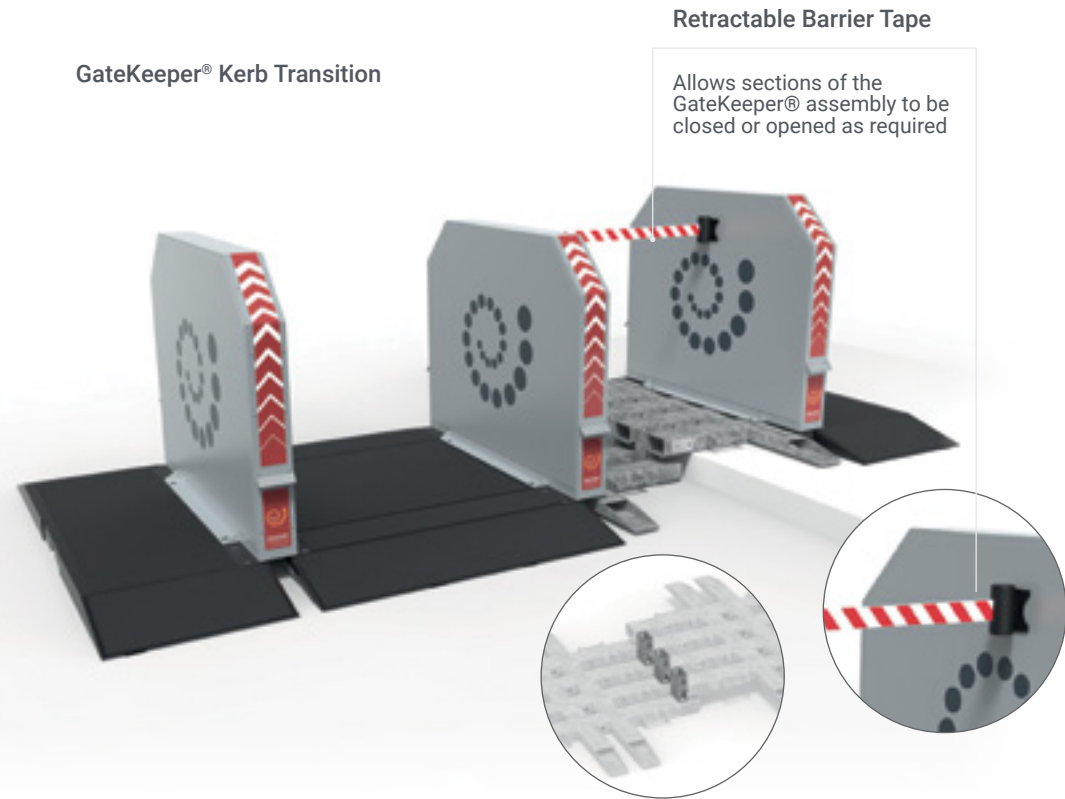

Retractable Barrier Tape

Allows sections of the GateKeeper® assembly to be closed or opened as required


Kerb transition joints allow GateKeeper® assemblies on roads and footpaths of varying heights to be connected in a single continuous run. Designed for use with 100mm high kerbs, the kerb transition can be customised if required.

RhinoGuard® GateKeeper® Kerb Transition

|  |                |
|--|----------------|
| Individual unit length x width x height (mm) | 628 x 180 x 60 |
| Individual unit weight (kg)                  | 8.5            |



GateKeeper® Compact End

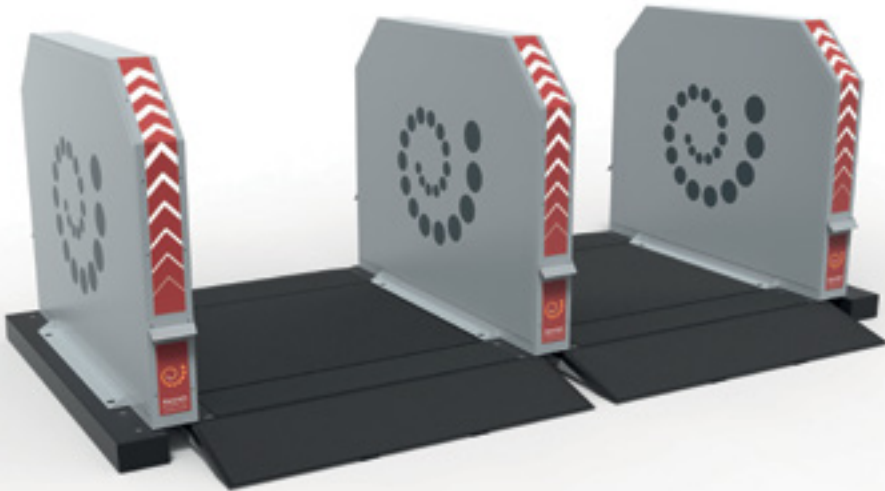

Protruding just beyond the outside face of the barrier shroud, the compact end provides an alternative solution for installations with insufficient space for the standard end unit.


RhinoGuard® GateKeeper® Compact End

|  |                   |
|--|-------------------|
| Individual unit length x width x height (mm) | 803 x 1876 x 1093 |
| Individual unit weight (kg)                  | 215               |


# RhinoGuard® Concrete GateKeeper®



GateKeeper® blocks can be spaced and linked using ramps

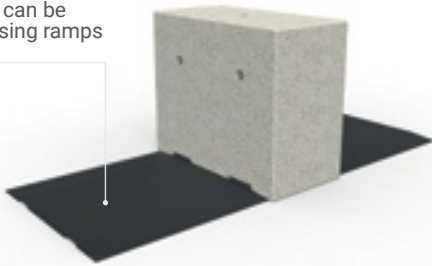

The pedestrian permeable RhinoGuard® concrete GateKeeper® has been successfully tested to government approved C-VAW standards, which provides proven resistance from ramming vehicles. During the test, different vehicles were used to demonstrate how the system would perform under various attack angles.

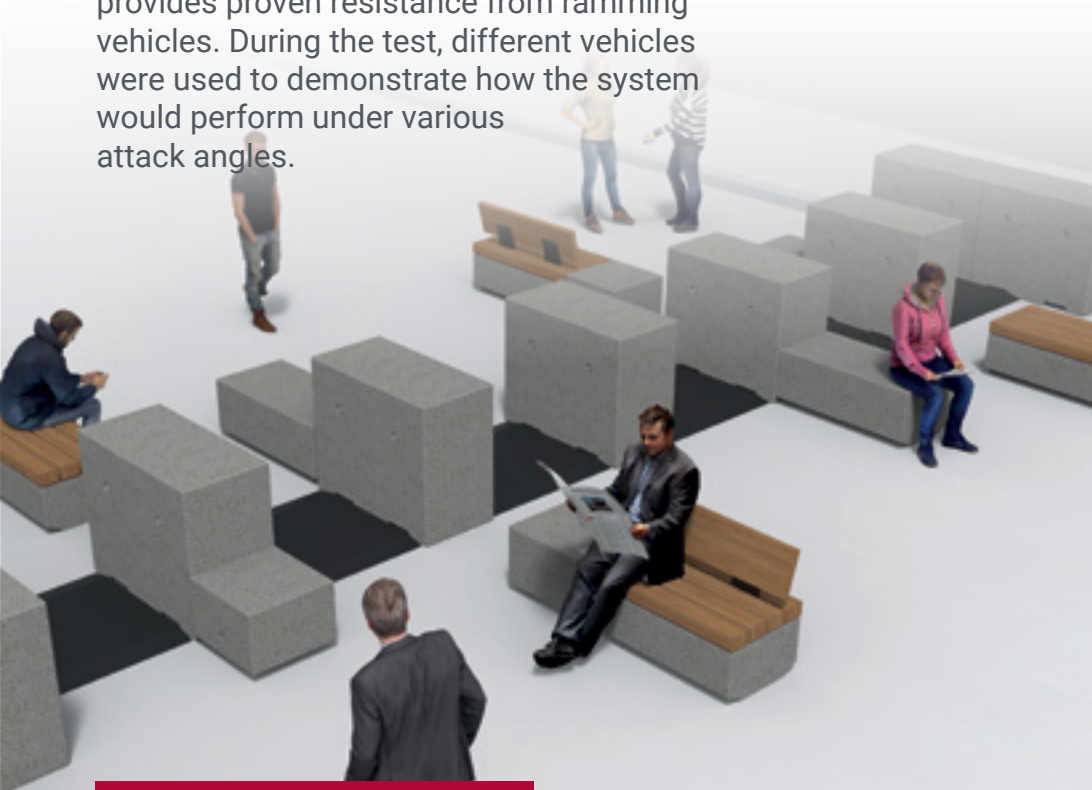

## Security specifications

### C-VAW


Tested to C-VAW standards  
This product holds a CPNI vehicle attack delay standard (VADS) rating

Concrete

Raw finish, available in silver grey or mid grey

## Standard colours / materials

Precious stone



Silver Grey Mid Grey

RhinoGuard® Concrete GateKeeper® Unit

|  |                   |
|--|-------------------|
| Individual unit length x width x height (mm) | 1200 x 600 x 1000 |
| Individual unit weight (kg)                  | 1981              |



# Protective Post & Rail

Marshalls Landscape Protection offers a range of protective Post and Rail systems which are available in a variety of styles and materials. We are also able to offer bespoke solutions to suit your requirements.

Please get in touch for more information.



Stainless Steel

Finish: brushed



Mild Steel

Finish: powder coated in a range of RAL colours (see page 13)



Stainless Steel

Finish: bead blasted



Mild Steel

Finish: powder coated in a range of RAL colours (see page 13)



Stainless Steel

|                 |                                      |
|-----------------|--------------------------------------|
| Height (mm)     | 1000                                 |
| Base diameter   | Various based on rating requirements |
| Standard fixing | Root fixed                           |

*\*Other size sleeves also available*

Mild Steel


|                 |                                      |
|-----------------|--------------------------------------|
| Height (mm)     | 1000                                 |
| Base diameter   | Various based on rating requirements |
| Standard fixing | Root fixed                           |

GEO

|                 |                                      |
|-----------------|--------------------------------------|
| Height (mm)     | 1000                                 |
| Base diameter   | Various based on rating requirements |
| Standard fixing | Root fixed                           |

DecorGuard

|                 |                                      |
|-----------------|--------------------------------------|
| Height (mm)     | 1040                                 |
| Base diameter   | Various based on rating requirements |
| Standard fixing | Root fixed                           |

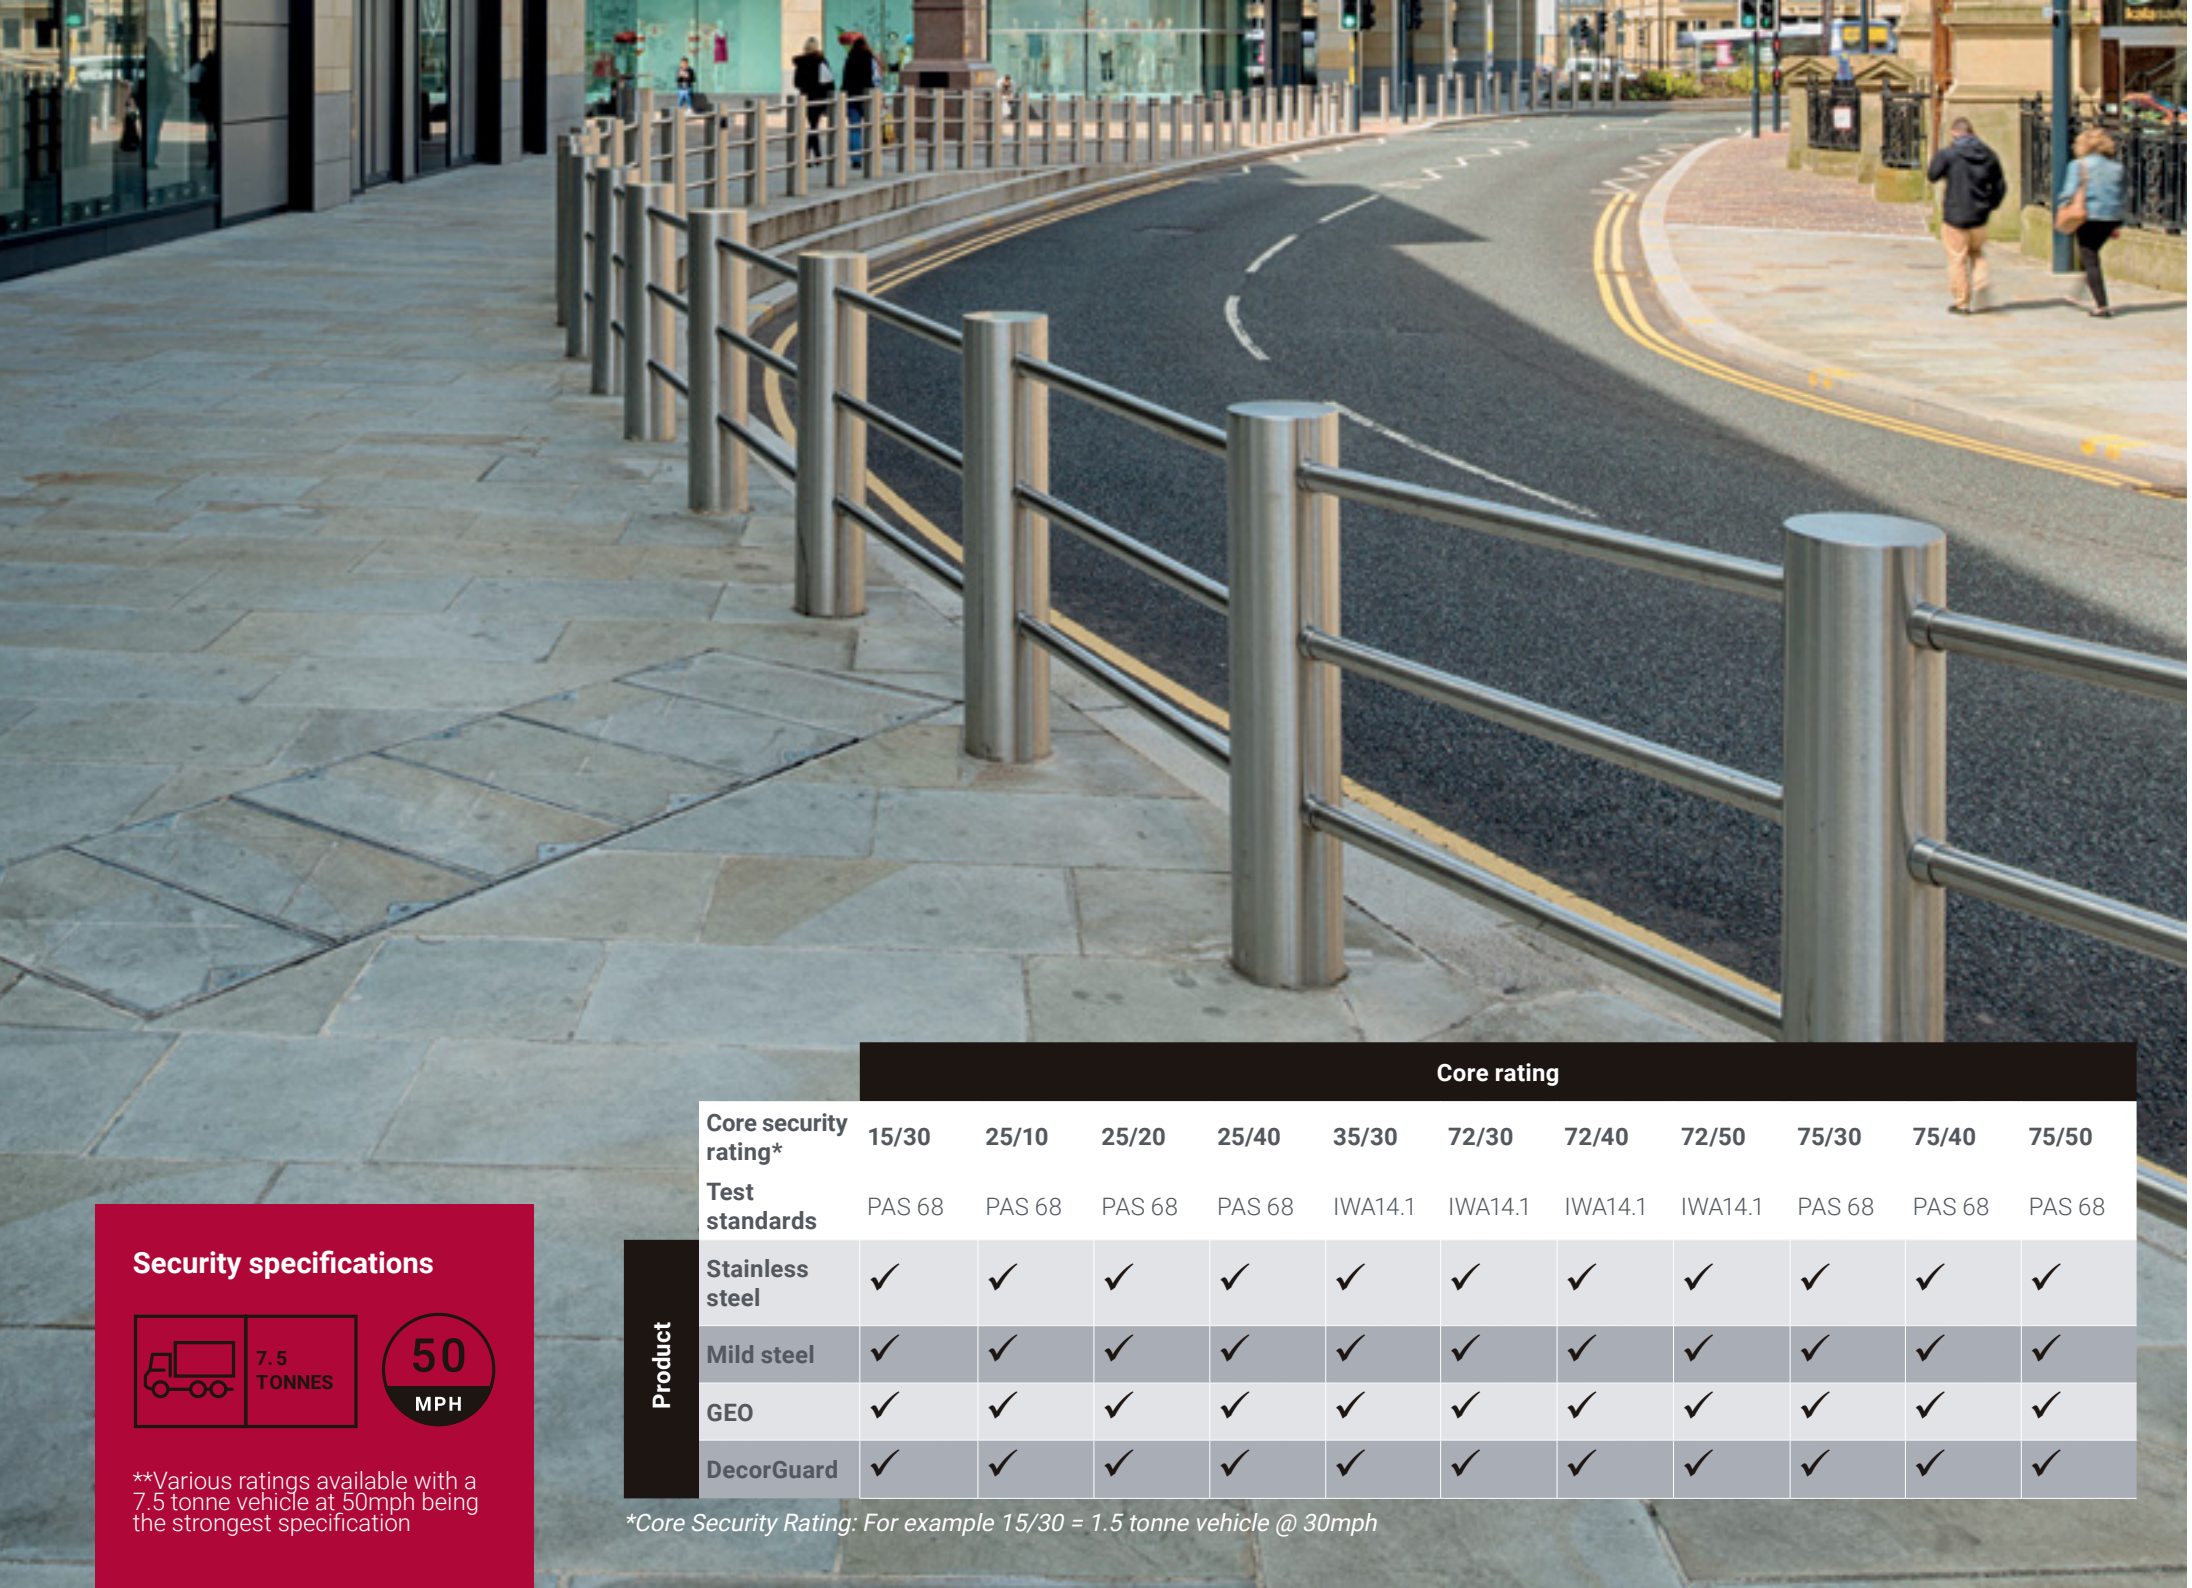

Security specifications



7.5 TONNES



\*\*Various ratings available with a 7.5 tonne vehicle at 50mph being the strongest specification

|         |                       | Core rating |        |        |        |         |         |         |         |        |        |        |
|---------|-----------------------|-------------|--------|--------|--------|---------|---------|---------|---------|--------|--------|--------|
|         | Core security rating* | 15/30       | 25/10  | 25/20  | 25/40  | 35/30   | 72/30   | 72/40   | 72/50   | 75/30  | 75/40  | 75/50  |
|         | Test standards        | PAS 68      | PAS 68 | PAS 68 | PAS 68 | IWA14.1 | IWA14.1 | IWA14.1 | IWA14.1 | PAS 68 | PAS 68 | PAS 68 |
| Product | Stainless steel       | ✓           | ✓      | ✓      | ✓      | ✓       | ✓       | ✓       | ✓       | ✓      | ✓      | ✓      |
|         | Mild steel            | ✓           | ✓      | ✓      | ✓      | ✓       | ✓       | ✓       | ✓       | ✓      | ✓      | ✓      |
|         | GEO                   | ✓           | ✓      | ✓      | ✓      | ✓       | ✓       | ✓       | ✓       | ✓      | ✓      | ✓      |
|         | DecorGuard            | ✓           | ✓      | ✓      | ✓      | ✓       | ✓       | ✓       | ✓       | ✓      | ✓      | ✓      |

\*Core Security Rating: For example 15/30 = 1.5 tonne vehicle @ 30mph



# RhinoGuard® product options

## Available core rating

The RhinoGuard® range has been designed to fulfil your aesthetic and security needs.

Our RhinoGuard® range of bollards are available with a wide selection of sleeve options, fixing types and foundation depths available to suit your scheme.

All our cores have been tested from 1.5 tonnes to 7.5 tonnes at various speeds up to 50mph.










|               |                  |                    |  | Standard Sleeve Options   |   |   |   |
|---------------|------------------|--------------------|--|---|---|---|---|
|               |                  |                    |  |  |  |  |  |
| Test standard | Security rating* | Core diameter (mm) | Height above ground allowing for finishes (mm) | Mild Steel  | Stainless Steel   | Ferrocass®  | GEO   |
| PAS 68        | 15/30            | 114                | 865  | ✓   | ✓   | ✓   | ✓   |
| PAS 170       | 25/10            | 75                 | 800  | ✓   | ✓   | ✓   | ✓   |
| PAS 170       | 25/20            | 139                | 800  | ✓   | ✓   | ✓   | ✓   |
| PAS 68        | 25/40            | 168                | 865  | ✓   | ✓   | ✓   | ✓   |
|               |                  | 168                | 868  | ✓   | ✓   | ✓   | ✓   |
| IWA 14.1      | 35/30            | 139                | 900  | ✓   | ✓   | ✓   | ✓   |
| IWA 14.1      | 72/30            | N/A                | 787  | ✓   | ✓   | ✓   | ✓   |
| IWA 14.1      | 72/40            | 194                | 990  | ✓   | ✓   | ✓   | ✓   |
| IWA 14.1      | 72/50            | 244                | 935  | ✓   | ✓   | ✓   | ✓   |
| PAS 68        | 75/30            | 194                | 858  | ✓   | ✓   | ✓   | ✓   |
| PAS 68        | 75/40            | 244                | 1000   | ✓   | ✓   | ✓   | ✓   |
|               |                  | 168                | 1005   | ✓   | ✓   | ✓   | ✓   |
| PAS 68        | 75/50            | 194                | 1000   | ✓   | ✓   | ✓   | ✓   |
|               |                  | 244                | 1030   | ✓   | ✓   | ✓   | ✓   |

\*Core Security Rating: For example 15/30 = 1.5 tonne vehicle @ 30mph

# RhinoGuard® Bollards

The RhinoGuard® bollard range comes with an variety of foundation types, including our RhinoGuard® Ultra Shallow 50® bollard which only requires a 50mm excavation depth.

|               |                  |                    |  | Core rating   |   |   |   |   |   |   |
|---------------|------------------|--------------------|--|---|---|---|---|---|---|---|
|               |                  |                    |  |  |  |  |  |  |  |  |
| Test standard | Security rating* | Core diameter (mm) | Height above ground allowing for finishes (mm) | Ultra Shallow 50® (50mm deep)   | Super Shallow 100® (100mm deep)   | Shallow Mount (150-200mm deep)  | Shallow Mount - Removable (150-200mm deep)  | Reinforced Concrete Cage (500-750mm deep)   | Reinforced Concrete Cage - Removable (500-750mm deep)                               | Lift Assist (1600mm deep)   |
| PAS 68        | 15/30            | 114                | 865  |   |   |   |   | ✓   | ✓   |   |
| PAS 170       | 25/10            | 75                 | 800  |   |   |   |   | ✓   |   |   |
| PAS 170       | 25/20            | 139                | 800  |   |   |   |   | ✓   |   |   |
| PAS 68        | 25/40            | 168                | 865  |   |   |   |   | ✓   | ✓   |   |
|               |                  | 168                | 868  |   |   | ✓   |   |   |   |   |
| IWA 14.1      | 35/30            | 139                | 900  |   |   |   |   | ✓   | ✓   | ✓   |
| IWA 14.1      | 72/30            | N/A                | 787  | ✓   |   |   |   |   |   |   |
| IWA 14.1      | 72/40            | 194                | 990  |   | ✓   |   | ✓   |   |   |   |
| IWA 14.1      | 72/50            | 244                | 935  |   |   | ✓   | ✓   |   |   |   |
| PAS 68        | 75/30            | 194                | 858  |   |   | ✓   | ✓   |   |   |   |
| PAS 68        | 75/40            | 244                | 1000   |   |   | ✓   | ✓   |   |   |   |
|               |                  | 168                | 1005   |   |   |   |   | ✓   | ✓   |   |
| PAS 68        | 75/50            | 194                | 1000   |   |   |   |   | ✓   |   |   |
|               |                  | 244                | 1030   |   |   |   |   | ✓   | ✓   |   |


Please note not all products are available with each foundation. Speak to a member of our team for more information



# RhinoGuard® Decorative Sleeves




## Diamond Fade



- A** Diamond Fade - RAL 9007 Grey Aluminium + RAL 7016 Anthracite Grey
- B** Diamond Fade - RAL 5011 Steel Blue + RAL 9007 Grey Aluminium
- C** Diamond Fade - Corten (RT-8286-I) + Bronze (RT-8102-1)
- D** Diamond Fade - Stainless Steel + RAL 5011 Steel Blue




## Dubai



- A** Dubai - Stainless Steel + RAL 9007 Grey Aluminium
- B** Dubai - Stainless Steel + RAL 5011 Steel Blue
- C** Dubai - Stainless Steel + Corten Fossil Base (RT-1553)
- D** Dubai - Stainless Steel + Bronze (RT-8102-1)



## Flower Burst




- A** Flower Burst - Stainless Steel + RAL 9007 Grey Aluminium
- B** Flower Burst - Stainless Steel + RAL 5011 Steel Blue
- C** Flower Burst - Stainless Steel + Corten Fossil Base (RT-1553)
- D** Flower Burst - Stainless Steel + RAL 7016 Anthracite Grey



## Standard colours / materials

### Standard RAL powder coated colours

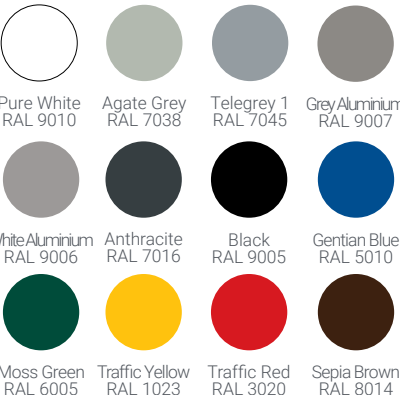

### ADAPTA powder coated colours



### Stainless steel



The decorative outer sleeve is offered in brushed stainless steel as standard but can be powder coated on request.

The inner core is also available in any standard RAL or ADAPTA powder coat.

## Security specifications



\*\*Various ratings available with a 7.5 tonne vehicle at 50mph being the strongest specification

|                       |          |
|-----------------------|----------|
| Height (mm)           | 1000     |
| Base diameters Ø (mm) | 204, 254 |
| Weight (kg)           | 35, 52   |

# RhinoGuard® Natural Stone Sleeves

Choosing natural stone means opting for a unique product. The natural stone bollard sleeves have an authentic, timeless character and provide a durable and sustainable choice.

Available in 5 colour variations, the sleeves are tailored around your requirements and core selection so are available in numerous ratings to suit your scheme.

Chamfer Natural Stone Sleeve  
Brackendale shown

## Security specifications



\*\*Various ratings available with a 7.2 tonne vehicle at 50mph being the strongest specification

Chamfer Natural Stone Sleeve

Shown in Laurel Bank




Fillet Natural Stone Sleeve

Shown in Thornlake



## Standard colours / materials

### Natural Stone



|               |                          |
|---------------|--------------------------|
| Height (mm)   | Assorted sizes available |
| Diameter (kg) | Assorted sizes available |

*Sleeve size is tailored around the bollard core selected*



# RhinoGuard® Bespoke Sleeves

Utilising the experience and knowledge of our team of design engineers, we can develop bespoke sleeve styles in a range of materials and colour options to meet the requirements of any project.

Our design experience and production expertise are your guarantee of success. We strive to offer a unique service that supports you from your first concept sketches right through to installation of the finished product.

Please get in touch if you would like more information.



Natural Stone Bollards



Decorative Flower Burst Bollards




Cristina Planters  
(engineered solutions)




Sloped Bollards




Valentines Bespoke Bollards

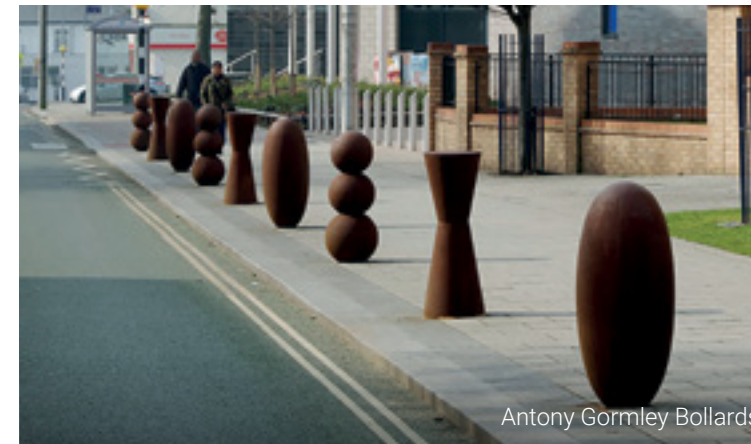

Antony Gormley Bollards

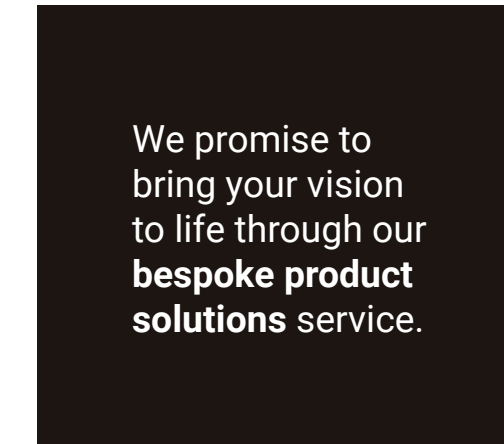

Bespoke Designed Bollards

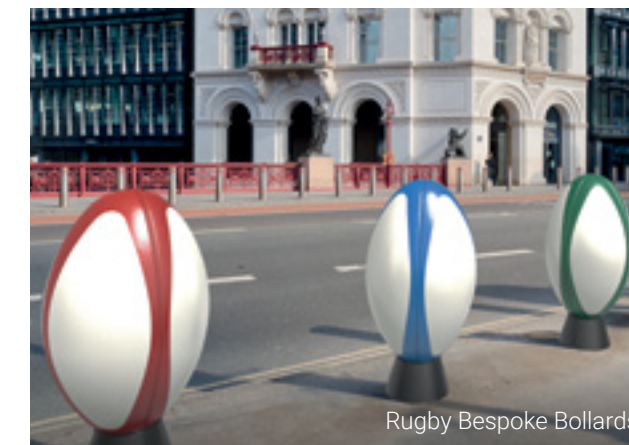

Rugby Bespoke Bollards



Orione Planters (engineered solutions)




Billy & Belinda Bollards



PiPencil Bollards



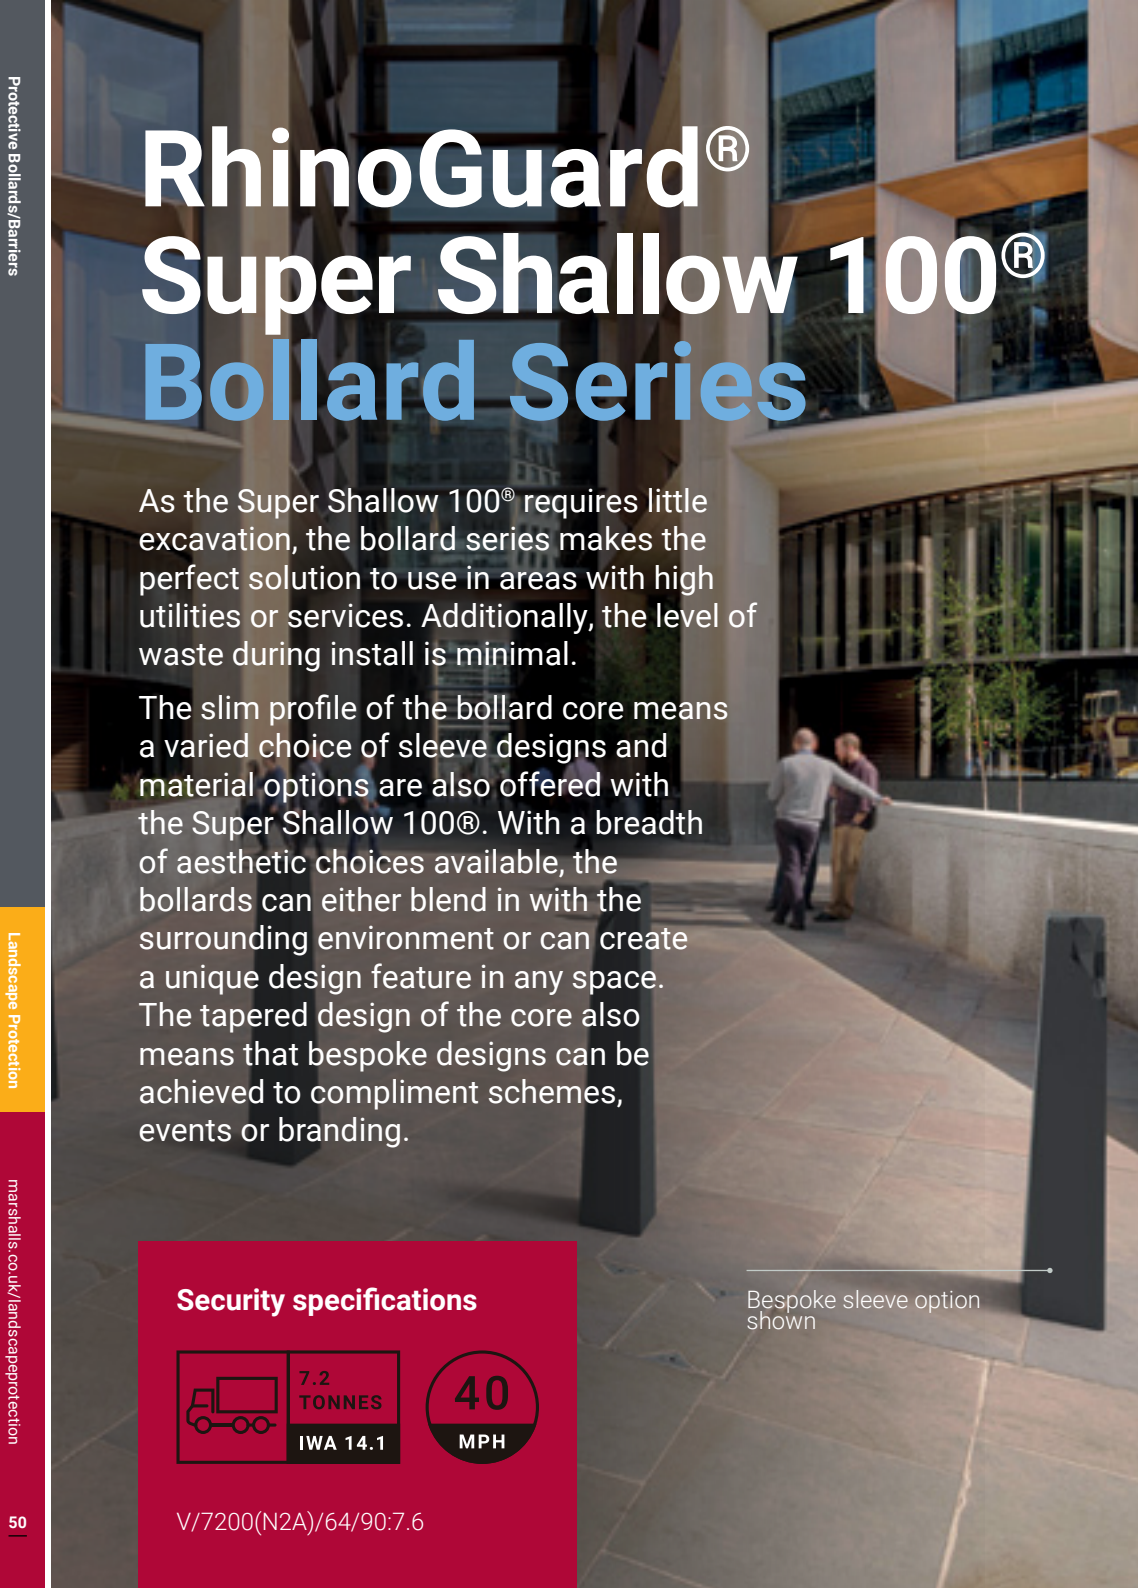

# RhinoGuard® Super Shallow 100® Bollard Series

As the Super Shallow 100® requires little excavation, the bollard series makes the perfect solution to use in areas with high utilities or services. Additionally, the level of waste during install is minimal.

The slim profile of the bollard core means a varied choice of sleeve designs and material options are also offered with the Super Shallow 100®. With a breadth of aesthetic choices available, the bollards can either blend in with the surrounding environment or can create a unique design feature in any space. The tapered design of the core also means that bespoke designs can be achieved to compliment schemes, events or branding.

## Security specifications



7.2  
TONNES

IWA 14.1

40

MPH

V/7200(N2A)/64/90:7.6



Both the Ultra Shallow 50® and the Super Shallow 100® core bollard elements can also be incorporated in to our seating, cycle stands, lighting, handrails and wayfinding solutions, offering a variety of innovative and protective design solutions to meet a range of requirements.

### Outer sleeve

Several options are available: Mild Steel, Stainless Steel, Ferrocast® or bespoke designs

### Internal bollard core

Mild steel with a galvanised finish

|                                  |     |
|----------------------------------|-----|
| Overall height above ground (mm) | 995 |
| Width x depth Ø (mm)             | 194 |
| Foundation depth (mm)            | 100 |
| Weight (kg)                      | 520 |

### Standard colours / materials

Mild steel



Also available with Standard RAL powder coated colours. See page 13

# RhinoGuard® Ultra Shallow 50® Bollard Series

Requiring just a 50mm excavation depth, the RhinoGuard® Ultra Shallow 50® is the perfect solution for use on bridges and other areas where underground service and utilities affect installation.

The bollard series has been successfully crash tested in two different foundations under the IWA-14.1 standard and is capable of stopping a 7.2 tonne vehicle travelling at 30mph.

## Security specifications



7.2  
TONNES

IWA 14.1

30

MPH

V/7200(N2A)/48/30:1.1  
Footpath foundation impact test

V/7200(N2A)/48/30:1.1  
Cycleway foundation impact test

Westminster sleeve shown



Along with the Westminster style Ferrocast® sleeve design and the standard mild and stainless steel options, the slim profile of the bollard core allows for a varied choice of sleeves.

### Standard colours / materials


Mild steel




Also available with Standard RAL powder coated colours. See page 13

### Bollard core


Mild Steel galvanised finish, with several sleeve options available: Mild Steel, Stainless Steel, Ferrocast® or bespoke designs

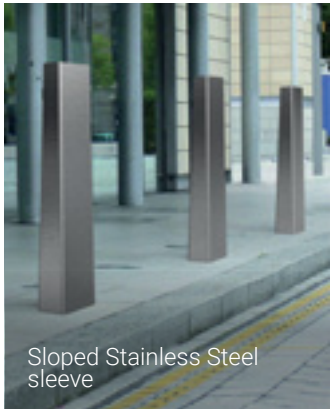

Sloped Stainless Steel sleeve

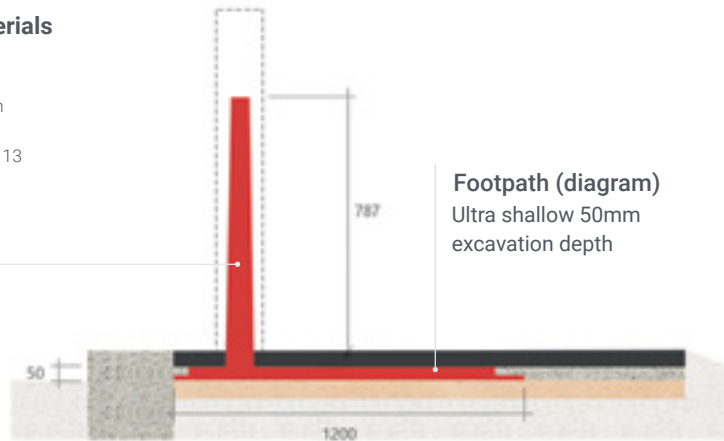

Footpath (diagram)  
Ultra shallow 50mm excavation depth

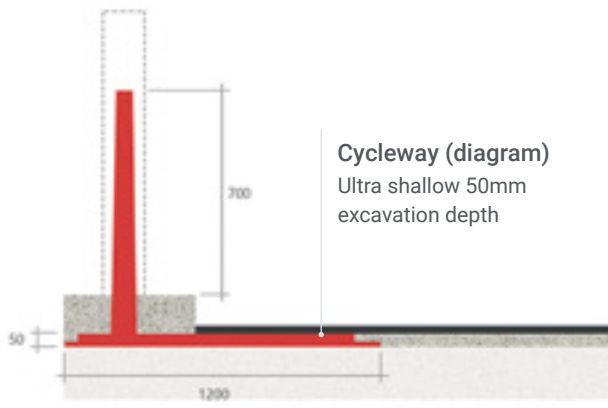

Cycleway (diagram)  
Ultra shallow 50mm excavation depth

|                                  |                                 |
|----------------------------------|---------------------------------|
| Overall height above ground (mm) | 700 (cycleway) / 787 (footpath) |
| Width x depth Ø (mm)             | 200 x 100                       |
| Foundation depth (mm)            | 50                              |
| Weight (kg)                      | 390                             |


*\*See pages 48-49 for our RhinoGuard® Ultra Shallow 50® with the addition of a Beam barrier system*



# RhinoGuard® Beam

Incorporating the RhinoGuard® Ultra Shallow 50®, the RhinoGuard® Beam has been crash tested to the IWA 14.1 standard and can successfully stop a 7.2 tonne vehicle travelling at 30mph.

With tailored length options available to suit the scheme's requirements, the protective barrier has the capability of spanning manholes, services, chambers and other obstacles, whilst allowing for expansion and contraction. It can also be used on bridges and other areas where underground service and utilities affect installation.



7.2  
TONNES

IWA 14.1

30

MPH


V/7200(N2A)/48/30:0  
Beam impact test

V/7200(N2A)/48/30:1.1  
RhinoGuard® Ultra Shallow 50®  
footpath foundation impact test

V/7200(N2A)/48/30:1.1  
RhinoGuard® Ultra Shallow 50®  
cycleway foundation impact test



RhinoGuard® Beam standard solution

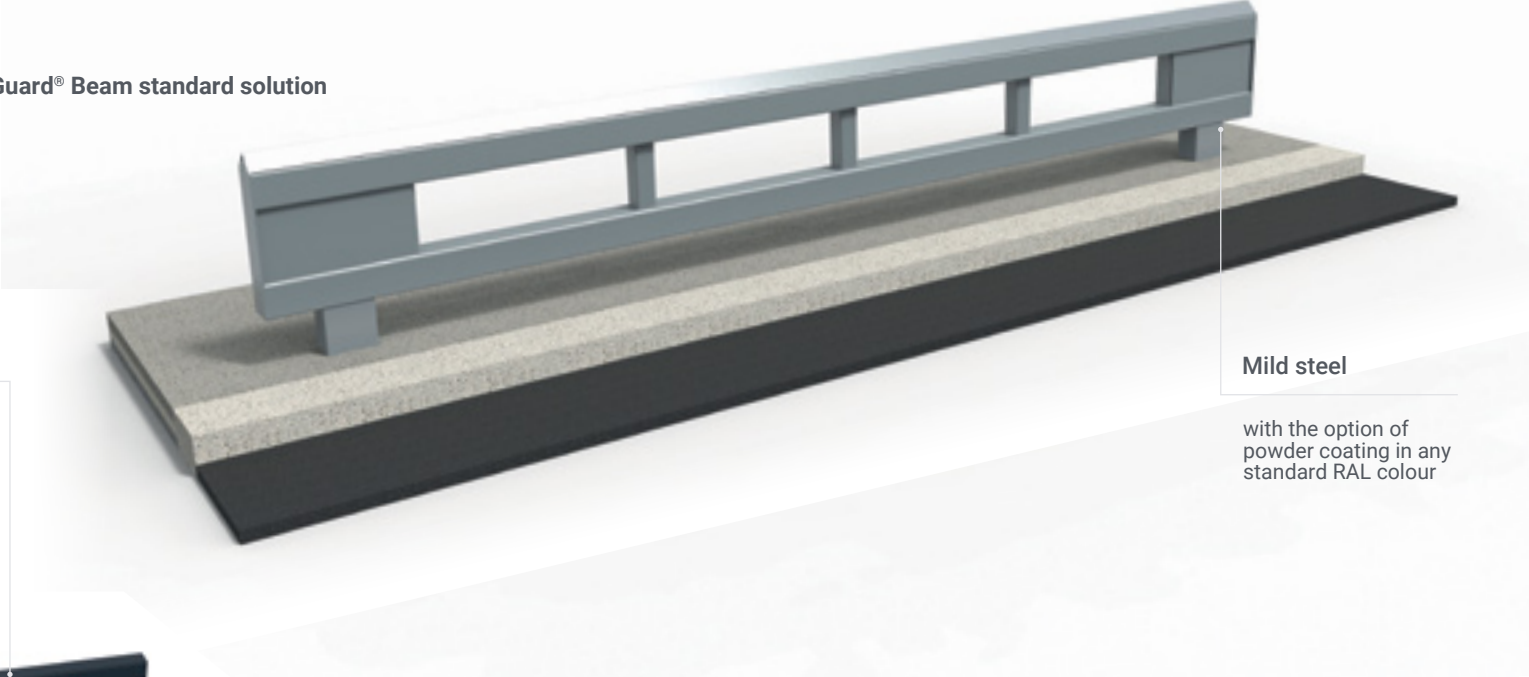


Powder coated mild steel

Mild steel

with the option of powder coating in any standard RAL colour

Ferrocass®

Customise Beam with a number of design options, including Ferrocass® reinforcements

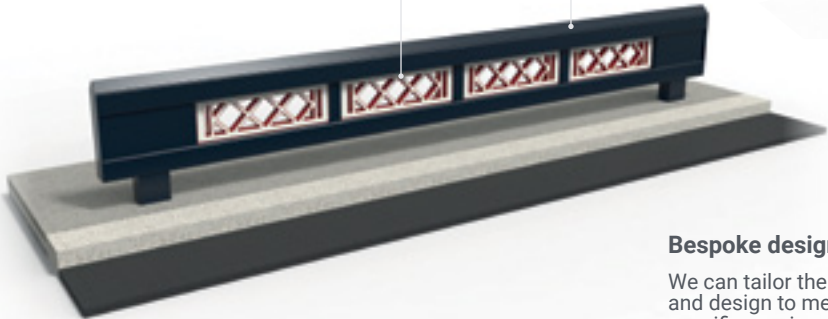


Bespoke designs


We can tailor the length and design to meet your specific requirements.

## Standard colours / materials


### Standard RAL powder coated colours




Pure White  
RAL 9010




Agate Grey  
RAL 7038




Telegrey 1  
RAL 7045




Grey Aluminium  
RAL 9007




White Aluminium  
RAL 9006




Anthracite  
RAL 7016




Black  
RAL 9005




Gentian Blue  
RAL 5010




Moss Green  
RAL 6005



Traffic Yellow  
RAL 1023



Traffic Red  
RAL 3020



Sepia Brown  
RAL 8014

Stainless steel

Mild Steel as standard with various finish options available.

Option of powder coating in a range of RAL colours as standard, with branded customisation also available.

## Features & benefits

- Provides 0m stopping distance
- Tailored length options available
- Spans gaps where a foundation isn't possible
- Requires just 50mm embedment
- Simple installation
- Bespoke design options are available including branded customisation
- Physically and visually unobtrusive
- Allows for expansion
- No areas for concealment

|                                  |            |
|----------------------------------|------------|
| Overall height above ground (mm) | 872        |
| Width x depth Ø (mm)             | 5670 x 150 |
| Foundation depth (mm)            | *Various   |
| Weight (kg)                      | 721        |

\*See page 47 for more information on our RhinoGuard® Ultra Shallow 50®



Beam is demountable and can therefore be removed quickly to provide access for plant or emergency service vehicles





# RhinoGuard® Standard Sleeve Options

Standard sleeve designs are available in mild steel, stainless steel and Ferrocast® polyurethane and can be specified with reflective banding for increased visibility and safety.

Bespoke design commissions for other styles and finishes can also be accommodated on request. Please see page 42 - 45 for more information.



7.5  
TONNES

50

MPH

\*\*Various ratings available with a 7.5 tonne vehicle at 50mph being the strongest specification

Contemporary Ferrocast® sleeve shown




|                  | Stainless Steel Sleeves | GEO Stainless Steel Sleeves | LED Marker Sleeves | Steel Sleeves | Ferrocast® Sleeves |
|------------------|-------------------------|-----------------------------|--------------------|---------------|--------------------|
| Height (mm)      | 1000                    |                             |                    | 1100          | Assorted sizes     |
| Diameters Ø (mm) | 168, 194, 204, 273      | 129, 154, 204, 256          | 140, 204, 254      |               | Assorted sizes     |

*Sleeve size is tailored to the bollard core selected*

# RhinoGuard® 25/10 and 25/20 PAS 170 Cores

Able to withstand the force of a 2.5 tonne vehicle driving at up to 10mph or 20mph, the RhinoGuard® PAS 170 cores are an excellent choice for protecting public spaces, providing assurance against lower speed ram-raids and impacts.

The certified steel cores are available with a choice of standard and bespoke sleeve options.




2.5  
TONNES

PAS170

10

MPH

IT/2500/16/90:0.8




2.5  
TONNES

PAS170

20


MPH

IT/2500/32/90:2.0

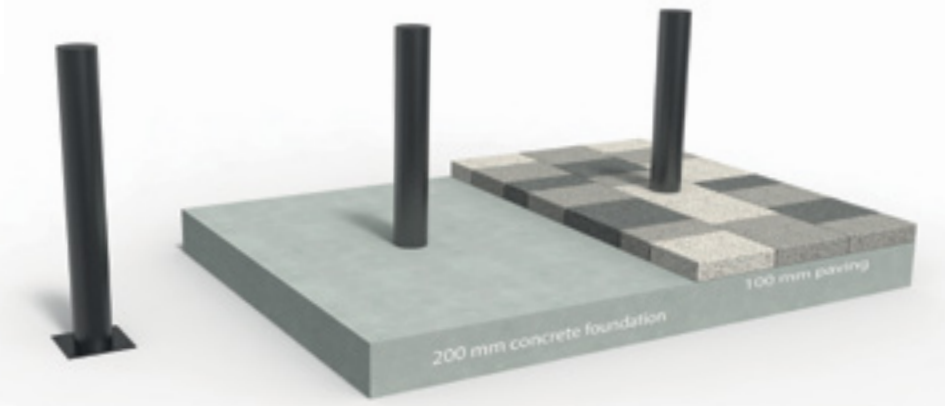


**Standard colours / materials**


**Standard RAL powder coated colours**




Pure White  
RAL 9010




Agate Grey  
RAL 7038




Telegrey 1  
RAL 7045




Grey Aluminium  
RAL 9007




White Aluminium  
RAL 9006




Black  
RAL 9005




Gentian Blue  
RAL 5010




Moss Green  
RAL 6005



Traffic Yellow  
RAL 1023




Traffic Red  
RAL 3020



Sepia Brown  
RAL 8014

**Mild steel**



Galvanised mild steel finish, with the option of powder coating.

Available with a range of standard and bespoke sleeve options. Please see pages 42 - 45.

|   | PAS 170 25/10<br>(2.5 tonne at 10mph) | PAS 170 25/20<br>(2.5 tonne at 20mph) |
|---|---------------------------------------|---------------------------------------|
| Overall height above ground (mm)        | 800                                   |                                       |
| Overall height including root (mm)      | 1100                                  |                                       |
| Diameter (mm)                           | 75                                    | 140                                   |
| Foundation type                         | Root fixed                            |                                       |
| Foundation length x width x height (mm) | 4080 x 700 x 300 (inc. cover)         |                                       |
| Weight (kg)                             | 45                                    | 55                                    |

Protective Bollards/Barriers

Landscape Protection

marshalls.co.uk/landscapeprotection

55



# RhinoGuard® GEO Street Furniture

The coordinated GEO range with integrated RhinoGuard® protective technology reflects the best of modern urban design: simplicity, sustainability and robust materials in a low profile form.

Manufactured using a bead blasted grade 316 stainless steel, the GEO products are exceptionally strong and require very low maintenance.

## Security specifications



\*\*Various ratings available with a 7.5 tonne vehicle at 50mph being the strongest specification



GEO Litter Bin

Stainless steel /  
brushed satin



GEO Cycle Stand

Stainless steel /  
brushed satin



Standard colours / materials


Stainless steel



|                                  | GEO Litter bin | GEO Cycle Stand |
|----------------------------------|----------------|-----------------|
| Overall height above ground (mm) | 1100           |                 |
| Foundation root depth (mm)       | 500            |                 |
| Surface finishing (mm)           | 100            |                 |
| Overall length (mm)              | 1700           |                 |
| Overall width (mm)               | N/A            | 1132            |
| Core diameter Ø (mm)             | *Various       |                 |
| Sleeve diameter Ø (mm)           | 204            |                 |
| Bin diameter Ø (mm)              | 500            | N/A             |
| Weight (kg)                      | 46             | 238             |

\*Various bollard cores available depending on security rating required

# Protective Automated Products

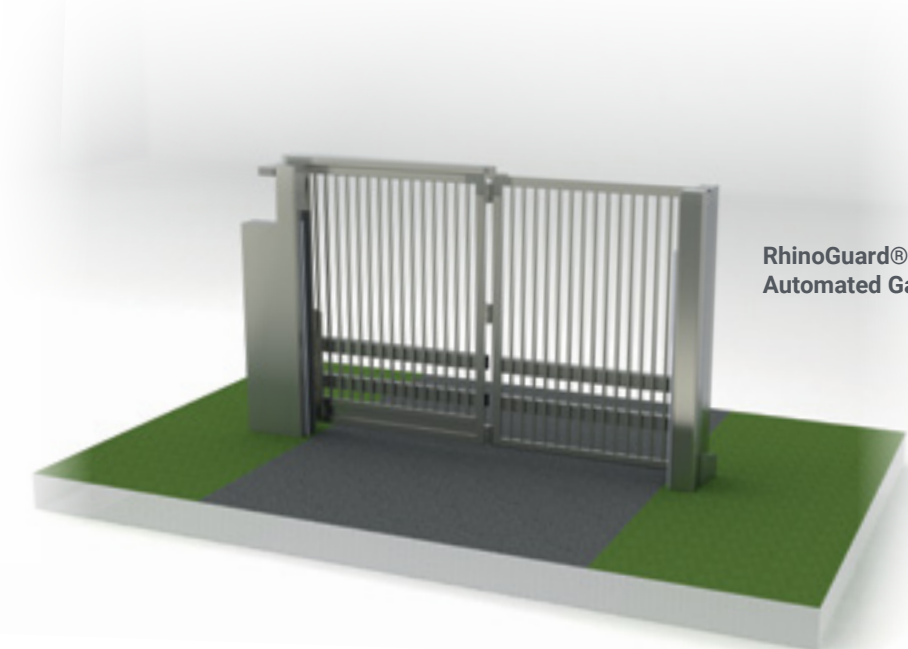

Standard colours / materials

Standard RAL powder coated colours



Stainless steel



## Security specifications



\*\*Various ratings available with a 7.5 tonne vehicle at 50mph being the strongest specification

|                      | Automated Bollards | Automated Blockers | Automated Gates |
|----------------------|--------------------|--------------------|-----------------|
| Height (mm)          | Max. 100           | Max. 1100          | 2400            |
| Base diameter Ø (mm) | Max. 350           | Max. 4000          | 4200            |
| Standard fixing      | Root fixed         |                    |                 |

\* Heights and widths vary depending on rating. Other options available, please speak to a member of our team about your automated product requirements.




# RhinoGuard® Redi-Rock™


The Redi-Rock™ HVM wall is proven to stop a 7.5 tonne truck at 30mph and is an effective, removable solution that requires minimal maintenance.

Interconnected with steel cables and with no ground anchors required, the fast-to-install freestanding blocks can be deployed, picked up and moved with no ground work required making this solution ideal for use in crowded places, transport hubs, utility and critical infrastructure as well as buildings of high importance.

Due to its natural stone appearance Redi-Rock™ blends into the background and is aesthetically pleasing, protecting its surrounding without looking out of place.

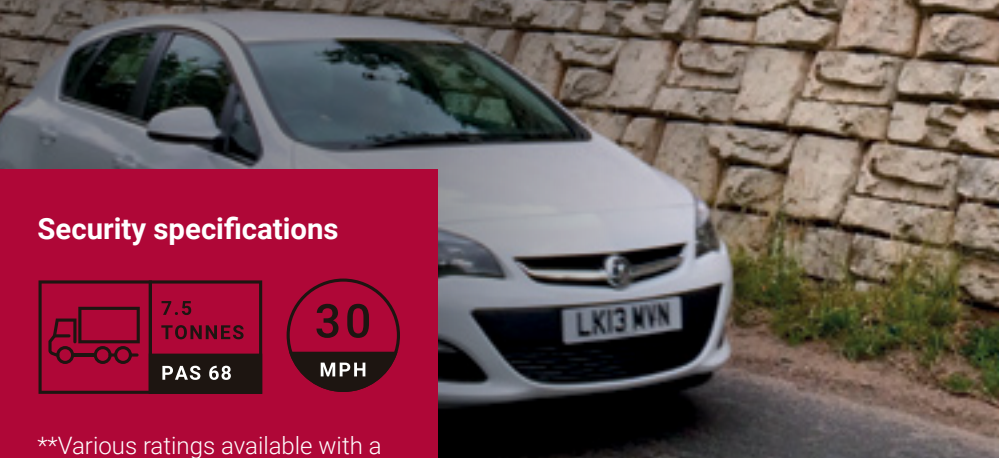

Security specifications



7.5 TONNES

PAS 68

30

MPH

\*\*Various ratings available with a 7.5 tonne vehicle at 50mph being the strongest specification



The Redi-Rock™ system is also available as a standard walling system for the retention of earth, landscaping and flood protection applications. For more information on this system please contact a member of the team.



### Standard colours / materials

Standard RAL powder coated colours




|             |              |
|-------------|--------------|
| Height (mm) | Variable     |
| Fixing type | Freestanding |

# RhinoGuard® Titan® Kerb

The RhinoGuard® Titan® Kerb is a high containment solution designed to keep vehicles on their intended path, and to prevent the overrun of vulnerable areas adjacent to the carriageway via a physical and visual barrier.

The 400mm high Titan® Kerb not only offers clear visual delineation between trafficked and non-trafficked areas, it also ensures that any errant traffic is safely redirected back onto its intended path. The product is an essential tool for designers, acting as a passive system that protects vulnerable installations like pedestrian refuges.

Security specifications




1.5 TONNES

IWA 14.1

50

MPH

V/1500[M1]/80/20:0.2

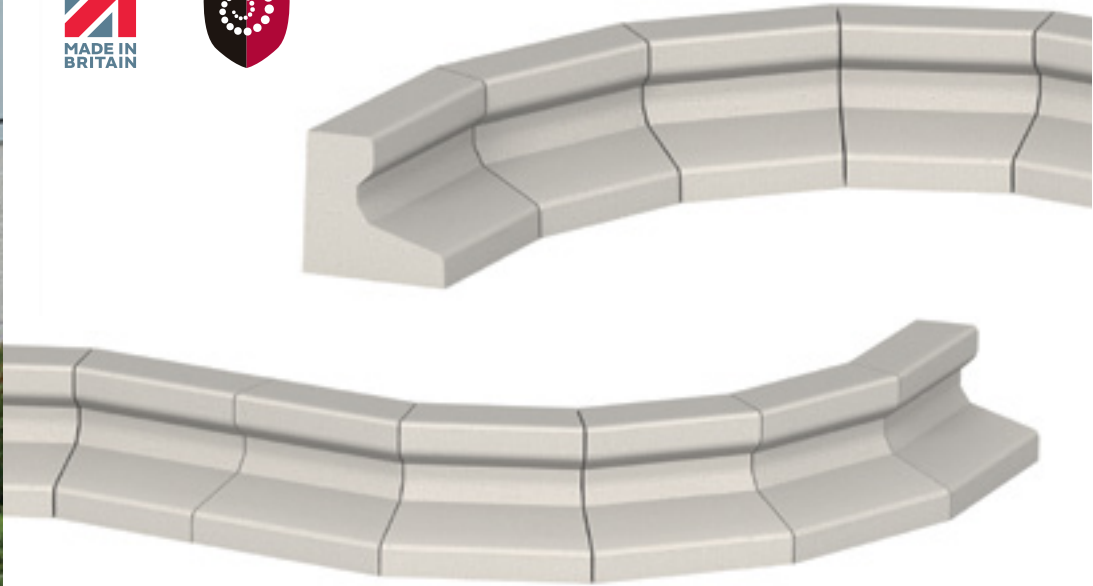

### Standard colours / materials



Smooth Grey

| Height (mm)        | External radius |         |         |         |         |         |         |         |         |         | Internal radius |         |         |         |  |
|--------------------|-----------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|-----------------|---------|---------|---------|--|
|                    | 400             |         |         |         |         |         |         |         |         |         |                 |         |         |         |  |
| Face length (mm)   | 965/975         | 955/975 | 945/975 | 935/975 | 797/841 | 734/785 | 807/884 | 317/394 | 217/294 | 975/955 | 975/935         | 836/785 | 961/884 | 589/666 |  |
| Width (mm)         | 390             |         |         |         |         |         |         |         |         |         |                 |         |         |         |  |
| Radius covered (m) | 76/25           | 25/15   | 15/11   | 11/8.5  | 7.5     | 6.0     | 4.5     | 2.0     | 1.5     | 76/25   |                 |         |         |         |  |
| No. per 1/4 circle | 122-40          | 40-24   | 24-18   | 18-14   | 14      | 12      | 8       |         |         |         | 122-40          |         |         |         |  |
| Weight (kg)        | 233             | 232     | 230     | 229     | 207     | 194     | 221     | 104     | 80      | 232     | 229             | 182     | 198     | 132     |  |



# Aesthetically pleasing Landscape Protection is the way forward

Installing protective measures to defend public spaces against vehicle-borne terror attacks or accidental collisions has traditionally been viewed as a necessary evil in areas such as city centres, stations and sporting venues. This has led to a tendency to give minimal consideration to how these measures fit with the aesthetics of the surrounding environment. Too often, the result is ugly, obtrusive installations that remind people of the threat that exists, potentially putting them off from visiting and enjoying public spaces.



Public square



Sports stadium

Design-led protection is the way forward, keeping people safe... not scared®.



Retail park



Public square



Public square

We design and build protective street furniture that blends in seamlessly with the landscape. Our approach enables architects, planners and designers to secure spaces without instilling fear.



Transport link



Retail park



Our RhinoGuard® products are all Secured by Design which means they have all been subject to rigorous testing and have been fully certificated by an independent, third-party certification body.

Secured by Design have many partner organisations, ranging from the Home Office, local authorities, housing associations, developers and manufacturers. Working closely with standards and certification bodies, Secured by Design ensures that publicly available standards actually meet the needs of the police and public alike.



If you can't find what you need within the Marshalls Landscape Protection range, **your options don't end there.**

## Design & Engineering capability

Our specialist design and engineering teams are experienced in a range of materials from natural stone and concrete to mild steel, stainless steel and timber.

Only by consistently pushing boundaries and challenging convention can we create public spaces that stand out.

With every element sourced, tailored or created around your project vision, our theoretical and practical understanding of urban space is unrivalled. Our exceptional bespoke products often start with a flash of inspiration that needs to be fully explored and carefully nurtured throughout the project.

We love to stretch our creativity beyond the typical. Inspired by your vision, ambition and aspiration, our open-minded approach means: **'We will where others won't.'**



## Project Management

To ensure projects run smoothly, Marshalls follow a structured 7 step approach. This is led by a dedicated Project Manager from the initial programme of works through to the site inspection and project handover.

### 01 Project Manager allocated

A specialist Project Manager is allocated to the client giving a single point of contact from initial project scoping through to installation and handover.

### 02 Provisional programme

Working alongside the client, the dedicated Project Manager will detail a provisional programme of works considering site conditions, site programme, contractual implications and health and safety.

### 03 Site survey

If a site survey is required, it will be conducted by a fully qualified member of the Marshalls team. The client will be provided with layout drawings for approval.

### 04 Design

Following layout approval, product specification drawings will be issued and prototype products can be provided within this stage for certain bespoke projects.

### 05 Final review

Product design and project time-frames are confirmed in preparation for commencement of works.

### 06 Installation

Installation conducted by a specialist in the Marshalls Landscape Protection install team working in collaboration with the Project Manager.

### 07 Project handover and O&M

Project Manager to lead a site inspection and final evaluation with the client.



# HVM security accreditations explained

At the heart of Hostile Vehicle Mitigation are the BSI Publicly Available Specifications (PAS) and International Workshop Agreements (IWA). These have changed how security products are crash tested, designed and procured in order to protect people and places from hostile vehicle attacks, criminal activity and accidental damage.

All accreditations, overseen by the British Standards Institution (BSI), are designed for impact testing and rating Hostile Vehicle Mitigation (HVM) measures, such as bollards, blockers, planters, seating and barriers used for security and counter-terrorism purposes.

Measures crash-tested to the strongest specification under PAS 68 and IWA 14.1 can stop a 30 tonne vehicle travelling at 50mph. They can be built to withstand different levels of energy from an impact depending on the risk assessment, commonly referred to as a Vehicle Dynamic Assessment (VDA).

## PAS 68

Developed in 2005, the Publicly Available Specification, PAS 68 became the first UK impact test specification and has undergone several reviews since, the most recent taking place in 2013. PAS 68, specifies a performance classification for vehicle security barriers and their foundations when subjected to a horizontal impact.

The standard was devised and administered by the Centre for the Protection of National Infrastructure (CPNI), and tests security barriers at varying speeds, using different sized vehicles. Whilst it is only through specifying products successfully tested in accordance with PAS 68 that protective security can truly be assured, this does not necessarily mean that the highest specifications of PAS 68 protection are always required.

## PAS 69

BSI PAS 68 is complemented by the PAS 69 document, which provides guidance on the selection, installation, foundations and use of PAS 68 tested security products, taking into account site specific conditions, to ensure they are placed as effectively as possible.

PAS 69 suggests a maximum gap of 1.2m between the installed, upright faces of successive security products, to ensure that vehicles are prevented from encroaching freely between the barriers.

## PAS 170

PAS 170 delivers a testing standard for vehicles of up to 2.5 tonnes travelling at 10 or 20mph. Unlike previous anti-ram solutions, new products tested and certified by PAS 170 provide businesses and local authorities with assurance and proof of performance for the first time.



## IWA 14.1

IWA 14.1 is the global standard which has been developed directly from PAS 68 and has become the preferred accreditation of the two.

No matter where you are based or where you want to create a safe and beautiful space, the IWA workshop agreement standardises all counter terrorism impact testing agreements and models and combines them into one, making the testing and specification of products easier and clearer for all specifiers.

## IWA 14.2

IWA 14.2 provides guidance for the selection, installation and use of vehicle security barriers (VSBs) and describes the process of producing operational requirements (ORs). IWA 14.2 also gives guidance on a design method for assessing the performance of a VSB.

## C-VAW

C-VAW testing is a government approved approach to proving a product's resistance from a ramming vehicle attack. Various vehicles are used to see how the system will perform from other attacks including angular and driving at gaps between the products.

|                          |          | Vehicle mass (kg)                            |  |  |  |  |   |   |  |
|--------------------------|----------|--|--|--|--|--|---|---|--|
|                          |          | 1.5 tonne<br>Saloon car<br>(M1)              | 2.5 tonne<br>4x4 pickup<br>(N1G)             | 3.5 tonne<br>Flatbed van<br>(N1)             | Fully laden<br>7.5 tonne<br>2 axle lorry<br>(N2) | Fully laden<br>7.2 tonne<br>2 axle lorry<br>(N2) | Empty 18 tonne<br>2 axle lorry<br>(weighs 7.5<br>tonnes) (N3) | Empty 18 tonne<br>2 axle lorry<br>(weighs 7.2<br>tonnes - N3) | 30 tonne<br>4 axle lorry<br>(N3)             |
|                          |          | Used for PAS 68<br>& IWA14 impact<br>testing | Used for PAS 68<br>& IWA14 impact<br>testing | Used for PAS 68<br>& IWA14 impact<br>testing | Used for PAS 68<br>impact testing                | Used for IWA14<br>impact testing                 | Used for PAS 68<br>impact testing                             | Used for IWA14<br>impact testing                              | Used for PAS 68<br>& IWA14 impact<br>testing |
| Vehicle speed km/h (mph) | 16 (10)  | 15   | 25   | 35   | 74   | 71   | 74  | 71  | 296  |
|                          | 32 (20)  | 59   | 99   | 138  | 296  | 284  | 296   | 284   | 1185   |
|                          | 48 (30)  | 133  | 222  | 311  | 667  | 640  | 667   | 640   | 2667   |
|                          | 64 (40)  | 237  | 395  | 553  | 1185   | 1138   | 1185  | 1138  | 4741   |
|                          | 80 (50)  | 370  | 617  | 864  | 1852   | 1778   | 1852  | 1778  | 7407   |
|                          | 96 (60)  | 533  | 889  | 1244   |  |  |   |   |  |
|                          | 112 (70) | 726  | 1210   |  |  |  |   |   |  |

The table above provides the kinetic energy values (in kJ) created on impact, for each of the vehicle types and speeds used in PAS 68 & IWA 14.1 impact testing.



# International standards comparison

Over the last 15 years the Hostile Vehicle Mitigation testing standards have progressed and now more than one standard is used globally.

The table shows comparisons between the USA and international testing standards.



| Vehicle mass (kg)        |                            |                                |  |                      |                                 |  |                       |
|--------------------------|----------------------------|--------------------------------|--|----------------------|---------------------------------|--|-----------------------|
|                          | 1.5 tonne saloon car (M1)  | 2.5 tonne 4x4 pickup (N1G)     | Empty 18 tonne (weighs 7.5 tonnes) 2 axle lorry (N3) |                      | 30 tonne 4 axle lorry (N3)      | Empty 18 tonne 2 axle lorry (weighs 7.5 tonnes) (N3) |                       |
|                          | 1500 - PAS/IWA 1100 - ASTM | 2500 - PAS/IWA 2300 (P) - ASTM | 3500 - PAS/ IWA/ASTM                                 | 7200 (N2) - IWA/ASTM | 7500 (N3) - PAS 6800 (M) - ASTM | 30000 PAS/IWA 29500 (H) - ASTM                       | Old USA K rating test |
| Vehicle speed km/h (mph) | 16 (10)                    | 15                             | 25   | 35                   | 71                              | 74   | 296                   |
|                          | 32 (20)                    | 59                             | 99   | 138                  | 284                             | 296  | 1185                  |
|                          | 48 (30)                    | 133                            | 222  | 311                  | 640                             | 667/656  | 2667/2850             |
|                          | 64 (40)                    | 237/179                        | 395/375  | 553                  | 1137                            | 1185/1110  | 4741/4810             |
|                          | 80 (50)                    | 370/271                        | 617/568  | 864                  | 1778                            | 1852/1680  | 7407/7283             |
|                          | 96 (60)                    | 533/424                        | 889/887  | 1244                 |                                 |  |                       |
|                          | 112 (70)                   | 726                            | 1210   |                      |                                 |  |                       |

(International /USA) \* old USA K rating tests which use a 6800 (M) vehicle. The table above provides the kinetic energy values (in kj) created on impact, for each of the vehicle types and speeds used in IWA, PAS and ASTM impact testing. All test standards use a similar array of vehicles and speeds for testing and therefore deliver similar energy in terms of kilojoules (kj).

# Security ratings explained


The International (IWA14.1), UK (PAS 68) and USA (ASTM2656) test standards are defined with a specific rating which includes the vehicle type, test mass and vehicle speed, together with the penetration distance.

## PAS 68 & IWA 14.1

The PAS 68 and IWA14.1 classification is set out with a row of letters, symbols and numbers that indicate the specification that the product has been tested to. The key difference between the IWA14.1 rating and the PAS 68 is that with IWA14.1 the debris dispersion is not included.

PAS 68 performance rating example: Fixed Bollard V/7500(N2)/48/90:2.5/1.2

IWA14.1 performance rating comparison example: Fixed Bollard V/7500(N2)/48/90:2.5

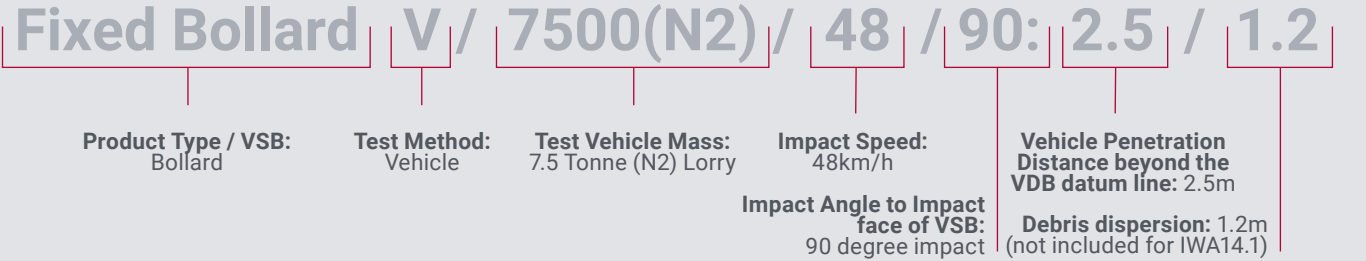

## ASTM 2656

ASTM 2656 is the USA testing standard which has grown from the original K ratings standard.

ASTM 2656 performance rating example: M 50 P1



For further information please contact the Marshalls Landscape Protection team on +44(0) 1422 312 993





Registered Office:  
Marshall's plc,  
Landscape House, Premier Way,  
Lowfields Business Park,  
Elland, HX5 9HT  
United Kingdom

UK: 0370 600 2425  
International: +44 (0) 1422 312 993  
USA: +1 603 465 1254

[marshall's.co.uk/landscapeprotection](http://marshall's.co.uk/landscapeprotection)

