


# Namaka Granite

Date Created: 19/01/22

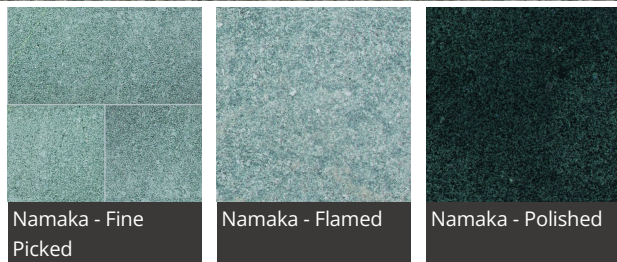

\*It should be noted that colour variations and markings are characteristic of Natural Stone. Inherent variations cannot be controlled nor the precise shade of stone guaranteed.

Granites are strong and durable landscaping materials, which can be supplied in a wide range of landscape products to provide a modern aesthetic. Marshalls' Namaka Granite is a strong, hard-wearing green grey stone suitable for both pedestrian and vehicular trafficked areas.

Available in flamed, fine picked and polished finishes it can be supplied as paving, setts, kerbs, tactile, steps, water management, copings, street furniture and other bespoke specialised masonry items including veneers for planters or furniture.

All Marshalls granites are fully tested to the appropriate standards in the UK and where relevant UKCA marked in accordance with the latest legislation.

DESCRIPTION	
Appearance	Grey green medium to slightly coarse grained
Manufacturing Process	Sawn
Geological Type	Monzonite
Quarry of Origin	Fujian Province, China
Governing Manufacturing Standards	All data where relevant to be established in accordance with BS EN 1341 : 2012, BS EN 1342 : 2012 & BS EN 1343 : 2012
Petrographical Description	Grey green medium to slightly coarse grained dolerite
UKCA Marking/DOP	<a href="https://www.marshalls.co.uk/declarations">https://www.marshalls.co.uk/declarations</a>

# Namaka Granite

Date Created: 19/01/22

## PHYSICAL PROPERTIES

Work Dimensions (mm)	450 x 450 x 50
	450 x 450 x 60
	450 x 450 x 70
	900 x 450 x 50
	900 x 450 x 60
	900 x 450 x 70
	600 x 600 x 50
	600 x 600 x 60
	600 x 600 x 70
	900 x 600 x 50
	900 x 600 x 60
	900 x 600 x 70
	200 x 100 x 50
	200 x 100 x 60
	200 x 100 x 70
	300 x 100 x 50
	300 x 100 x 60
	300 x 100 x 70
	300 x 150 x 50
	300 x 150 x 60
300 x 150 x 70	
300 x 200 x 50	
300 x 200 x 60	
300 x 200 x 70	

Abrasion Resistance (mm) 15mm (Mean value to EN 14157 : 2004 (Hev = 16 mm))

Durability (Freeze-thaw) 28.3/27.1 MPa (Mean values to EN 12371 : 2006)

Material Density 2975 kg/m<sup>3</sup> (Mean value to EN 1936 : 2006)

Open Porosity (%) 0.10% (Mean value to EN 1936 : 2006)

Compressive Strength (MPa) 109 MPa (Mean value to EN 1926 : 2006 (Lev = 78.99 MPa))

Water Absorption (%) 0.10% (Mean value to EN 13755 : 2002 (Hev = 0.21%))

Transverse/FlexuralSplit/Breaking 15.84 MPa (Mean value to EN 12372 : 2006 (Lev = 13.53 MPa))

## TEXTURE SPECIFIC PROPERTIES

	Polished	Flamed	Fine Picked
Light Reflectance Value (LRV)	11.76	21.05	23.39
Surface Roughness (Rz-µm)	1.94	50	>75
Slip Resistance (BS 14231) (Dry)	65	92	95
Slip Resistance (BS 14231) (Wet)	25	70	75

## MANUFACTURING

Materials Control UKCA Marked to BS EN 1341 Paving

## SUSTAINABILITY

ERI Score Our Score: 1.9  
Cluster Score: 1.3

## FURTHER INFORMATION


Cleaning & Maintenance Available on request

Contact Us For technical information on the design, specification and construction when utilising the product, contact Group Technical Services on 0370 411 2233

# Namaka Granite

Date Created: 19/01/22

## Suggested Plan Sizes

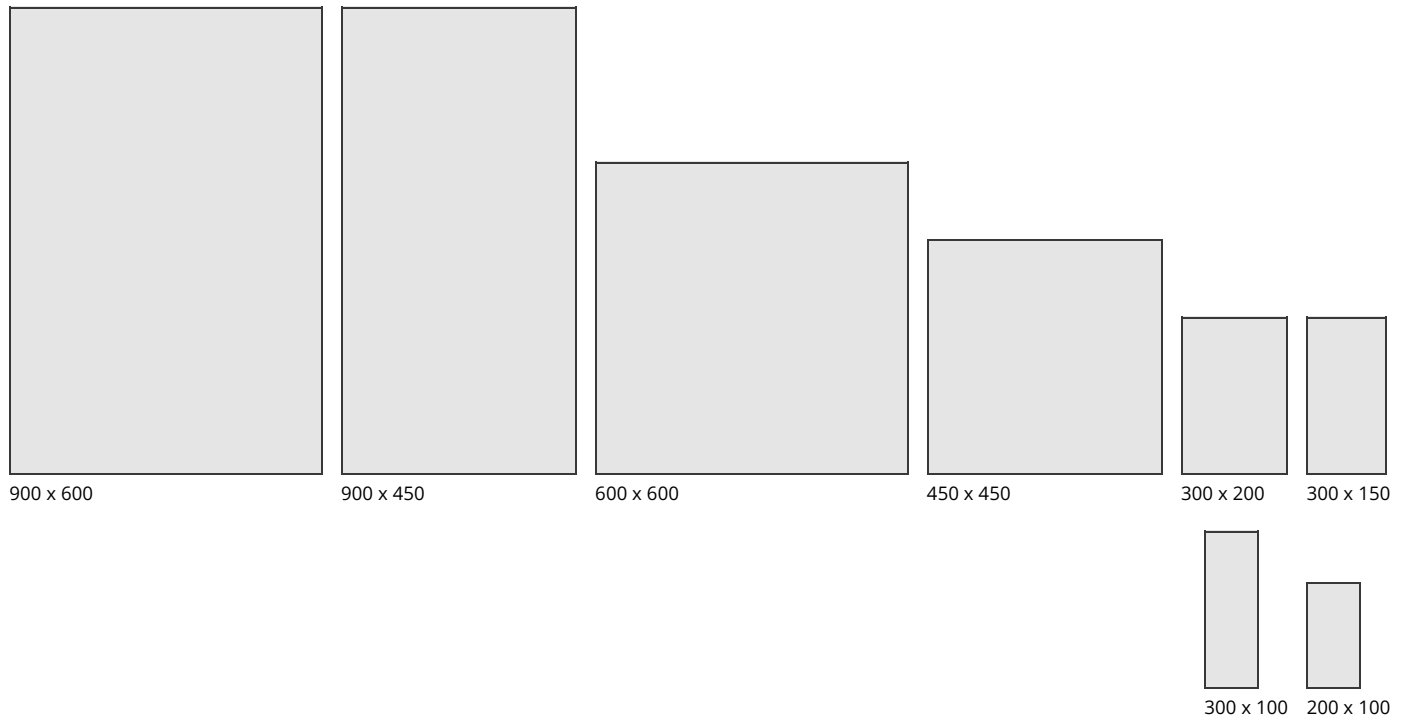

The plan sizes shown above illustrate popular sizes of our Natural Stone. Bespoke sizes are available upon request.

---