


Vesta Granite

Date Created: 10/12/21



Vesta_fine_picked

*It should be noted that colour variations and markings are characteristic of Natural Stone. Inherent variations cannot be controlled nor the precise shade of stone guaranteed.

Marshalls' **Vesta Granite** is a hard-wearing, strong and durable granite suitable for both pedestrian and vehicular trafficked areas.

Predominantly light grey, Vesta is available in a fine picked finish and is available as either paving or setts. All Marshalls granites are fully tested to the appropriate standards in the UK and where relevant UKCA marked in accordance with the latest legislation.

DESCRIPTION	
Appearance	Light grey granite
Manufacturing Process	Sawn
Geological Type	Granite
Quarry of Origin	Shangdong, China
Governing Manufacturing Standards	All data where relevant to be established in accordance with BS EN 1341 : 2012, BS EN 1342 : 2012 & BS EN 1343 : 2012
Petrographical Description	Pale grey granite with white and orange/pink phenocrysts and black fine grains.
UKCA Marking/DOP	https://www.marshalls.co.uk/declarations

Vesta Granite

Date Created: 10/12/21

PHYSICAL PROPERTIES

Work Dimensions (mm)	450 x 450 x 50
	600 x 600 x 50
	900 x 600 x 50
	200 x 100 x 50
	300 x 150 x 50
	300 x 200 x 50
	450 x 450 x 60
	900 x 450 x 60
	600 x 600 x 60
	900 x 600 x 60
	200 x 100 x 60
	300 x 100 x 60
	300 x 150 x 60
	300 x 200 x 60
	900 x 600 x 70
	200 x 100 x 70
	300 x 100 x 70
	300 x 150 x 70
	300 x 200 x 70
	450 x 450 x 70
900 x 450 x 50	
900 x 450 x 70	
600 x 600 x 70	
300 x 100 x 50	

Abrasion Resistance (mm) 17.5mm (Mean value to EN 14157 : 2004 (Hev = 18mm))

Durability (Freeze-thaw) 12.9/13.9 MPa (Mean values to EN 12371 : 2006)

Material Density 2631 kg/m³ (Mean value to EN 1936 : 2006)

Open Porosity (%) 1.0% (Mean value to EN 1936 : 2006)

Compressive Strength (MPa) 127 MPa (Mean value to EN 1926 : 2006 (Lev = 92.76 MPa))

Water Absorption (%) 0.33% (Mean value to EN 13755 : 2008 (Hev = 0.36%))

Transverse/FlexuralSplit/Breaking 13.4 MPa (Mean value to EN 12372 : 2006 (Lev = 9.3 MPa))

TEXTURE SPECIFIC PROPERTIES

Fine Picked

Surface Roughness (Rz-µm) 41.9

Slip Resistance (BS 14231) (Dry) 81.5

Slip Resistance (BS 14231) (Wet) 64.6

MANUFACTURING

Materials Control UKCA Marked to BS EN 1341 Paving
 UKCA Marked to BS EN 1343 Kerbs

SUSTAINABILITY

ERI Score Our Score: 1.4
 Cluster Score: 1.1

FURTHER INFORMATION


Cleaning & Maintenance Available on request

Contact Us For technical information on the design, specification and construction when utilising the product, contact Group Technical Services on 0370 411 2233

Vesta Granite

Date Created: 10/12/21

Suggested Plan Sizes

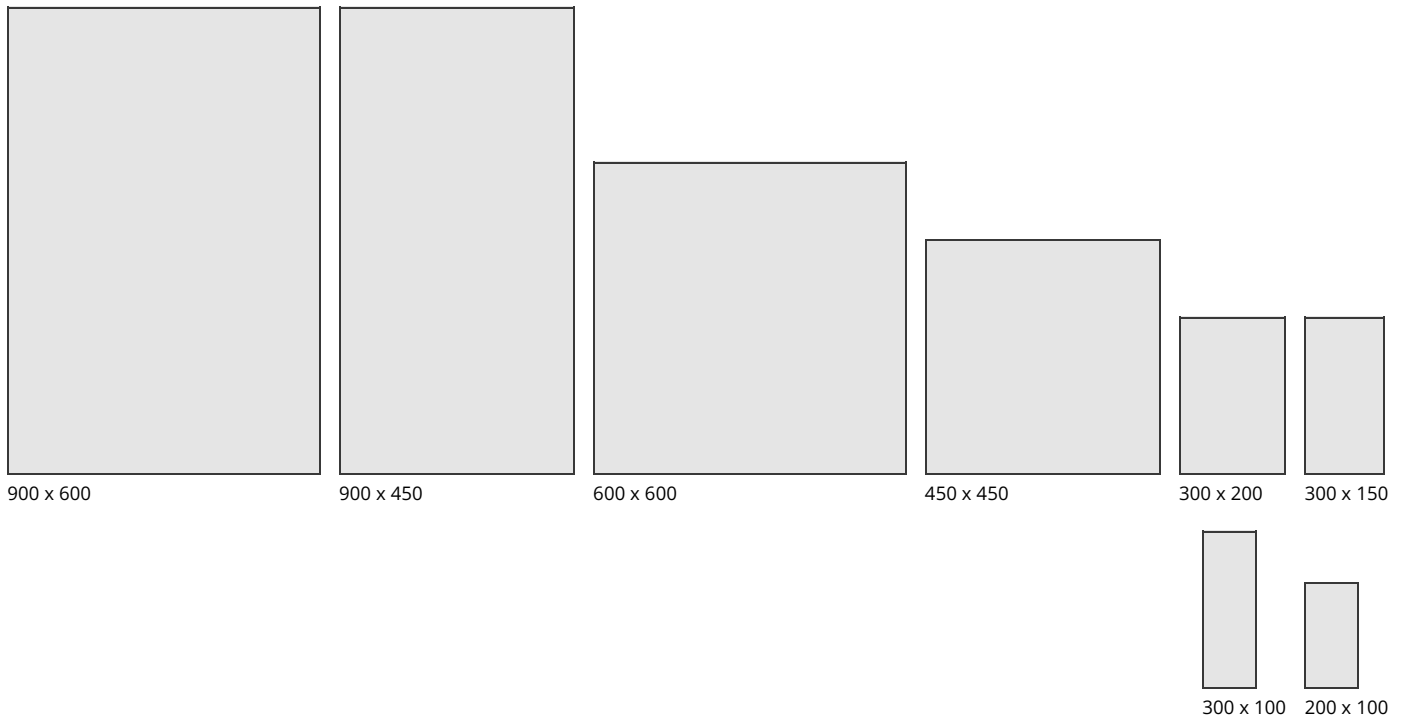

The plan sizes shown above illustrate popular sizes of our Natural Stone. Bespoke sizes are available upon request.
