


Yaletown Granite

Date Created: 19/01/22

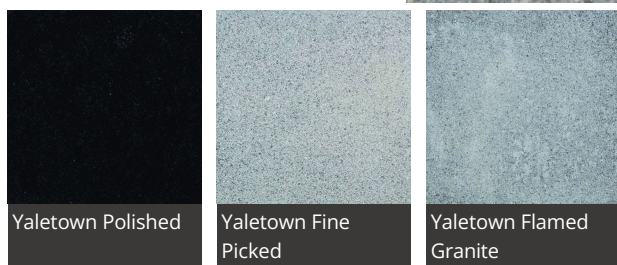

Yaletown Polished

Yaletown Fine Picked

Yaletown Flamed Granite

*It should be noted that colour variations and markings are characteristic of Natural Stone. Inherent variations cannot be controlled nor the precise shade of stone guaranteed.

Whether you're planning for pedestrian or vehicular trafficked areas, granite is an ideal option for its versatility, strength and durability.

Marshalls' Yaletown Granite is a mid-grey stone available in a flame textured, fine picked, bush hammered or polished finish. Yaletown Granite is suitable for both pedestrian or vehicular trafficked areas.

This granite offers excellent performance as paving, setts, kerbs, tactile, steps and in water management solutions. Yaletown Granite can also be used for street furniture or other bespoke specialised masonry items.

All Marshalls granites are fully tested to the appropriate standards in the UK and where relevant UKCA marked in accordance with the latest legislation.

DESCRIPTION	
Appearance	Small grey
Manufacturing Process	Sawn
Geological Type	Granite
Quarry of Origin	Binh Dinh Province, Vietnam
Governing Manufacturing Standards	All data where relevant to be established in accordance with BS EN 1341 : 2012, BS EN 1342 : 2012 & BS EN 1343 : 2012
Petrographical Description	Light to medium whitish grey coarse grained Granite
UKCA Marking/DOP	https://www.marshalls.co.uk/declarations

Yaletown Granite

Date Created: 19/01/22

PHYSICAL PROPERTIES

Work Dimensions (mm)	450 x 450 x 50
	450 x 450 x 60
	450 x 450 x 70
	900 x 450 x 50
	900 x 450 x 60
	900 x 450 x 70
	600 x 600 x 50
	600 x 600 x 60
	600 x 600 x 70
	900 x 600 x 50
	900 x 600 x 60
	900 x 600 x 70
	200 x 100 x 50
	200 x 100 x 60
	200 x 100 x 70
	300 x 100 x 50
	300 x 100 x 60
	300 x 100 x 70
	300 x 150 x 50
	300 x 150 x 60
300 x 150 x 70	
300 x 200 x 50	
300 x 200 x 60	
300 x 200 x 70	

Abrasion Resistance (mm) 16.5 mm Mean value to EN 14157 : 2004 (Hev = 17.8mm)

Durability (Freeze-thaw) 15/15.6 MPa (Mean values to EN 12371 : 2006)

Material Density 2820 kg/m³ (Mean value to EN 1936 : 2006)

Open Porosity (%) 0.39 % Mean value to EN 1936 : 2006

Compressive Strength (MPa) 118 MPa Mean value to EN 1926 : 2006 (Lev = 103 MPa)

Water Absorption (%) 0.17% Mean value to EN 13755 : 2008 (Hev = 0.20%)

Transverse/FlexuralSplit/Breaking 19.63 MPa Mean value to EN 12372 : 2006 (Lev = 16.65 MPa)

TEXTURE SPECIFIC PROPERTIES

	Flamed	Polished	Fine Picked
Light Reflectance Value (LRV)	21.1	10.41	27.81
Surface Roughness (Rz-µm)	36	1	>75
Slip Resistance (BS 14231) (Dry)	80	64	97
Slip Resistance (BS 14231) (Wet)	60	22	84

MANUFACTURING

Materials Control UKCA Marked to BS EN 1341 Paving

SUSTAINABILITY

ERI Score Our Score: 3.8
Cluster Score: 2.1


FURTHER INFORMATION

Contact Us For technical information on the design, specification and construction when utilising the product, contact Group Technical Services on 0370 411 2233

Yaletown Granite

Date Created: 19/01/22

Suggested Plan Sizes

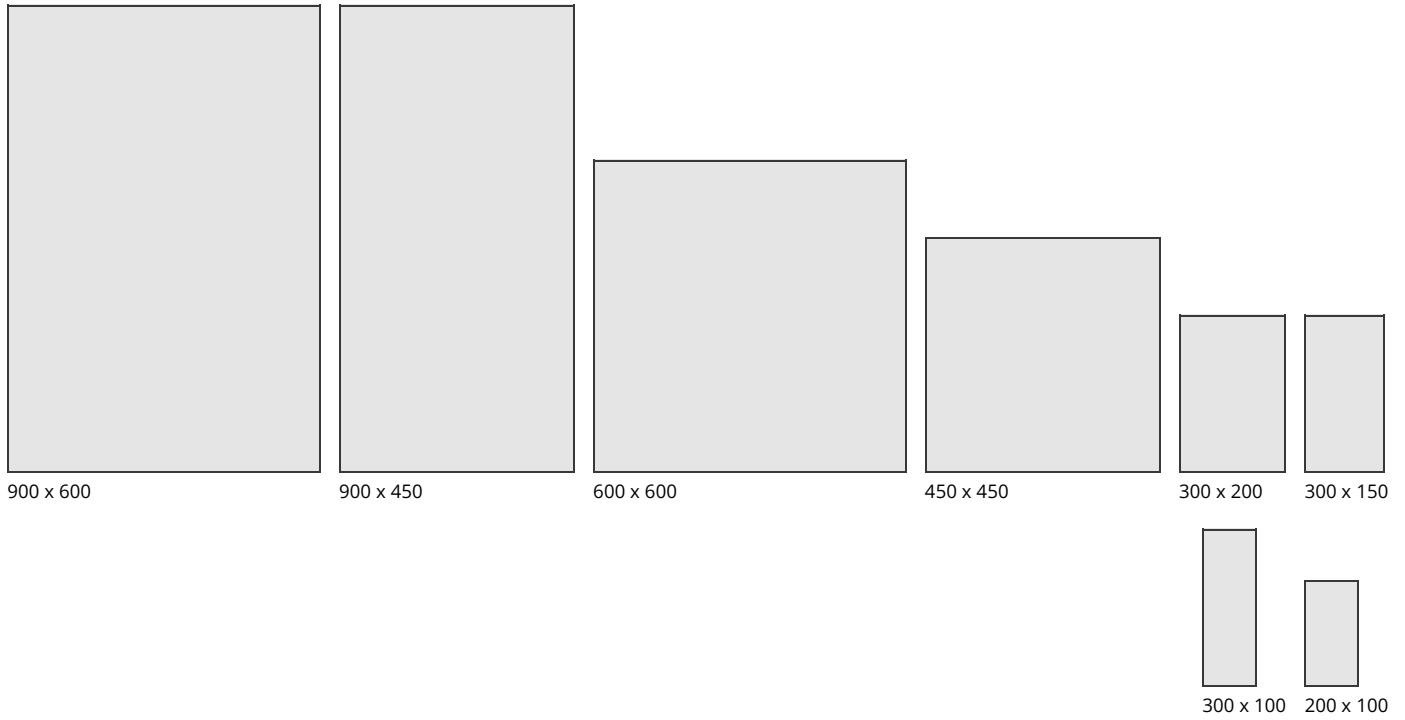

The plan sizes shown above illustrate popular sizes of our Natural Stone. Bespoke sizes are available upon request.
