


Hawks View Sandstone

Date Created: 24/02/23

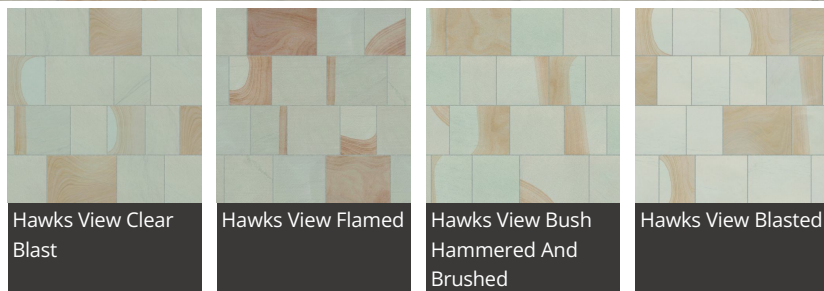

*It should be noted that colour variations and markings are characteristic of Natural Stone. Inherent variations cannot be controlled nor the precise shade of stone guaranteed.

A striking dual-colour brown and grey sandstone, Hawks View features natural banding, making every paver unique. Hawks View Indian Sandstone is offered in four different finishes allowing the creation of a variety of beautiful designs and blends in one scheme. Its impressive strength and high load-bearing capacity means it is particularly suited to mixed-use areas. This versatile sandstone is available in all applications and due to the size of the quarried block, it is perfect for larger items such as bespoke street furniture.

All our sandstones are fully tested to the appropriate standards in the UK and are all UKCA marked in accordance with the latest legislation.

DESCRIPTION	
Appearance	Grey to Brown Sandstone
Manufacturing Process	Sawn
Geological Type	Cambrian Sandstone
Quarry of Origin	Kota Region, Rajasthan, India
Governing Manufacturing Standards	All data where relevant to be established in accordance with BS EN 1341 : 2012, BS EN 1342 : 2012 & BS EN 1343 : 2012
Petrographical Description	Light beige bluish grey and light reddish brown fine grained Sandstone
UKCA Marking/DOP	https://www.marshalls.co.uk/declarations

Hawks View Sandstone

Date Created: 24/02/23

PHYSICAL PROPERTIES

Work Dimensions (mm)	450 x 450 x 50
	900 x 450 x 50
	600 x 600 x 50
	900 x 600 x 50
	200 x 100 x 50
	300 x 100 x 50
	300 x 150 x 50
	300 x 200 x 50
	450 x 450 x 63
	900 x 450 x 63
	600 x 600 x 63
	900 x 600 x 63
	200 x 100 x 63
	300 x 100 x 63
	300 x 150 x 63
	300 x 200 x 63
	450 x 450 x 75
	900 x 450 x 75
	600 x 600 x 75
	900 x 600 x 75
	200 x 100 x 75
	300 x 100 x 75
	300 x 150 x 75
	300 x 200 x 75
Abrasion Resistance (mm)	17mm (Mean value to EN 14157 : 2017) (Hev = 18.34mm))
Durability (Freeze-thaw)	23.3/25 Mpa (Mean values to EN 12371 : 2010)
Material Density	2520 kg/m ³ (Mean value to EN 1936 : 2006)
Open Porosity (%)	3.9% (Mean value to EN 1936 : 2006)
Compressive Strength (MPa)	151 MPa (Mean value to EN 1926 : 2006 (Lev = 85 MPa))
Water Absorption (%)	1.4% (Mean value to EN 13755 : 2008 (Hev = 1.56%))
Transverse/FlexuralSplit/Breaking	32.6 MPa (Mean value to EN 12372 : 2022 (Lev = 25 MPa))

TEXTURE SPECIFIC PROPERTIES

	Blasted	Flamed	Bush Hammered and Brushed	Clear Blast
Light Reflectance Value (LRV)	40.92	25	32.68	29.19
Surface Roughness (Rz-µm)	56.71	76.69	129.33	73.36
Slip Resistance (BS 14231) (Dry)	89	86	90	95

MANUFACTURING

Materials Control	CE Marked to BS EN 1341 Paving 1342 Setts 1343 Kerbs
-------------------	--

SUSTAINABILITY

ERI Score	Our Score: 3.6 Cluster Score: 2.4
-----------	--------------------------------------

FURTHER INFORMATION

Cleaning & Maintenance	Available on request
Contact Us	For technical information on the design, specification and construction when utilising the product, contact Group Technical Services on 0370 411 2233

Hawks View Sandstone

Date Created: 24/02/23


TEXTURE SPECIFIC PROPERTIES

Slip Resistance (BS 14231) (Wet)	78	62	69	76
-------------------------------------	----	----	----	----

Hawks View Sandstone

Date Created: 24/02/23

Suggested Plan Sizes

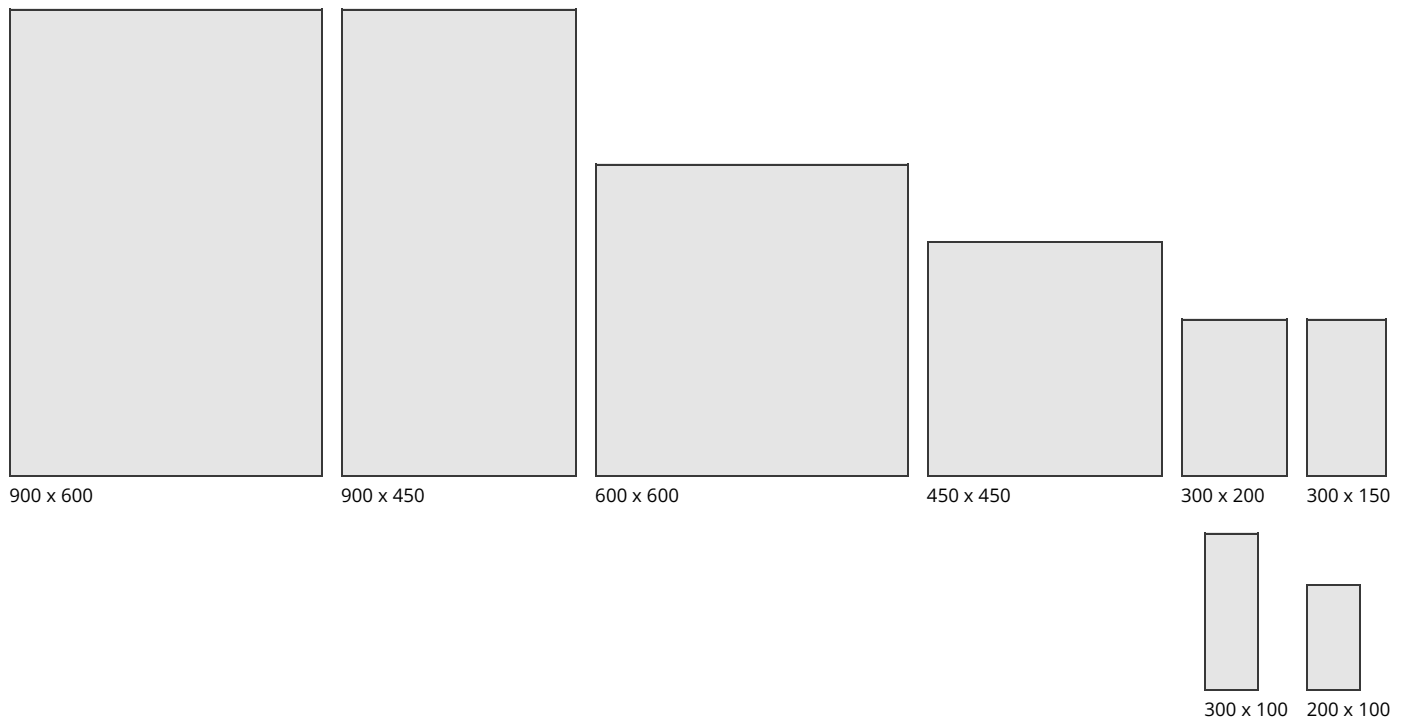

The plan sizes shown above illustrate popular sizes of our Natural Stone. Bespoke sizes are available upon request.