


## Sawn Versuro® Paving 570 x 570 x 22mm

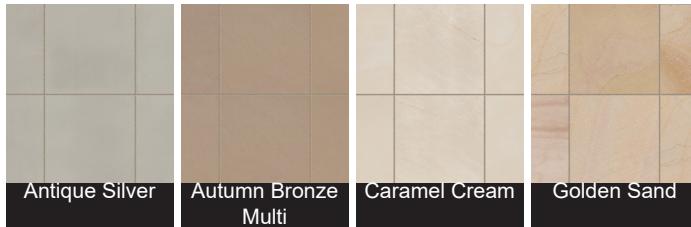

The Sawn Versuro garden paving collection is the ultimate in high end, contemporary design. Upgrade your garden with this luxurious, warm, natural Indian sandstone, available in four stunning neutral colour ways.

This versatile range combines aspirational looks and performance with durability and elegance. Its lightly blasted surface brings to life the natural character and elegance of this sandstone. The innovative texturing used in the processing of Sawn Versuro is unique to Marshalls and adds practical non-slip properties whilst maintaining the natural colour inherent within the stone.

All stones within this range are covered by the Marshalls Stone Standard quality mark that gives you complete assurance that your stone will stand the test of time. Complete your project with our stunning Sawn Versuro Walling, Sawn Versuro Edging or Sawn Versuro Steps to give you the ultimate garden transformation or for a similar product to Sawn Versuro take a look at our other products available in our Sandstone Paving Range.

DESCRIPTION	
Appearance	Fine grained, hard sandstone, varies from dark buff to brown with a sawn finish
Geological Type	Sedimentary Sandstone
Quarry Location	Quarries in the Rajpoora region of India
Base Raw Material	Natural Stone
Governing Manufacturing Standards	All data where relevant to be established in accordance with BS EN 1341 : 2012



## Sawn Versuro® Paving 570 x 570 x 22mm

PHYSICAL PROPERTIES		FURTHER INFORMATION	
Work Dimensions (mm)	570 x 570 x 22	Cleaning & Maintenance	Available on request
Abrasion Resistance (mm)	≤ 23mm (Wide Wheel Abrasion Test)	Weathering	Both natural and reconstructed stone products are affected by the action of sunlight and rainfall over time. Weathering It should be appreciated that with all products weathering and site conditions can cause shade variation to appear across the surface of individual units. This does not in any way affect the performance of the units and any such variation will diminish over a period of time as the product matures. Natural stone may show brown colouration as its iron content oxidises.
Material Density	2600 kg/m <sup>3</sup> (typically)	Product Evolution	Marshalls reserve the right to amend the technical information as deemed necessary and in accordance with the relevant national and international standards without notice
Slip/Skid Resistance (polished)	> 45 PSRV	Contact Us	For technical information on the design, specification and construction when utilising the product, contact Group Technical Services on 0370 411 2233
Slip/Skid Resistance (unpolished)	58 USRV		
Transverse/Flexural Split/Breaking	13.0 MPa (minimum)		
Water Absorption (%)	1% maximum		
SPECIFICATION			
Approx unit weight (kg)	18		
Installation	Available on request Keep all units dry before laying & protect incomplete workings during adverse weather or freezing conditions		
SUSTAINABILITY			
Carbon Footprint	45		
SUPPLY			
Av. Pack Size m <sup>2</sup>	19.49		
Av. pack weight (kg)	1142		