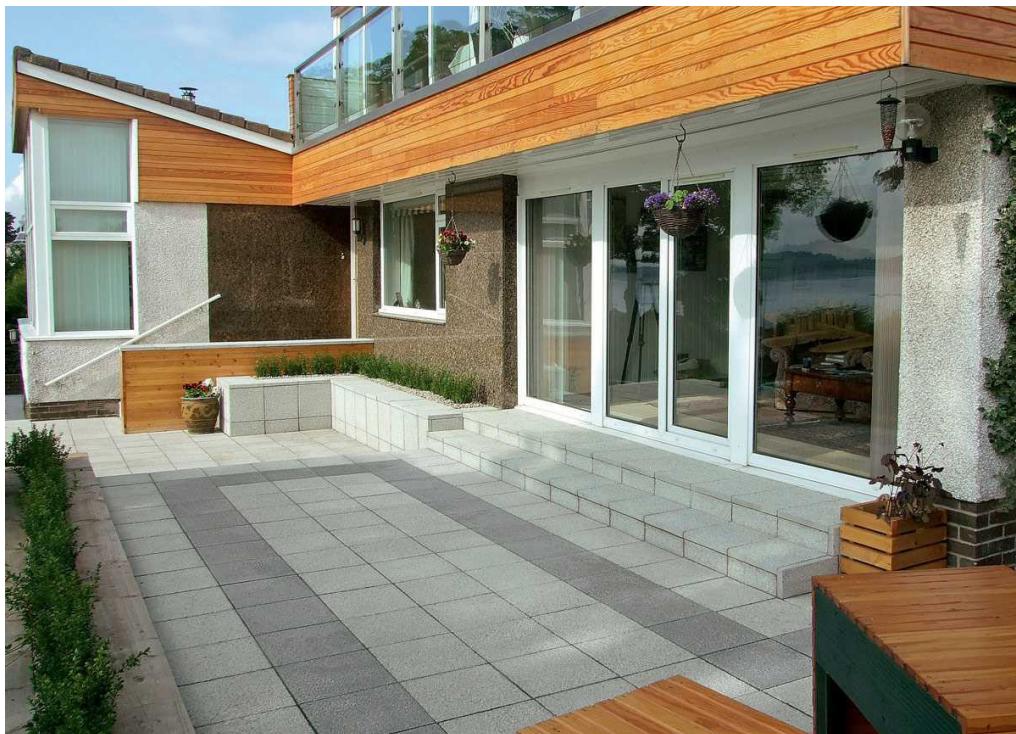


Argent® Paving Coarse 600 x 200 x 38mm


 Argent Coarse -
 Dark

 Argent Coarse -
 Light

Contemporary chic paving that brings together an attractive blend of high quality granite alternatives to create a smart and modern finish, with a sparkle. Available in a wide range of complimentary grey colours and a choice of two textures, it is ideal for creating a host of geometric patio patterns, with a full range of coordinating hard landscaping products for the perfect finish. Boost your patio design with our complimentary Argent Walling and Argent Copings.

DESCRIPTION

Manufacturing Process	Hydraulically pressed concrete
Base Raw Material	Concrete
Governing Manufacturing Standards	All data where relevant to be established in accordance with BS EN 1339 : 2003
UKCA Marking/DOP	www.marshalls.co.uk/declarations

For help with installation, please use our installation guide.



Argent® Paving Coarse 600 x 200 x 38mm

PHYSICAL PROPERTIES

Work Dimensions (mm)	598 x 198 x 38
Nominal Dimensions (mm)	600 x 200 x 38
Abrasion Resistance (mm)	≤ 23mm (Wide Wheel Abrasion Test)
Durability (Freeze-thaw)	≤ 1.0 kg/m ² as a mean with no individual value > 1.5 kg/m ²
Material Density	2300 kg/m ³ (typically)
Slip/Skid Resistance (polished)	PSRV > 45
Slip/Skid Resistance (unpolished)	USRV > 45
Thermal Conductivity (K value)	Design data as defined in BS EN 13369 : 2004
Transverse/Flexural Split/Breaking	Characteristic bending strength of 3.5 MPa with no individual result less than 2.8 MPa

FURTHER INFORMATION

Cleaning & Maintenance	Available on request
Efflorescence	Any product containing cement during its early life may exhibit a temporary white discolouration known as efflorescence. This is not a product fault and will gradually disappear with exposure to natural weathering and trafficking
Weathering	It should be appreciated that with all products weathering and site conditions can cause shade variation to appear across the surface of individual units. This does not in any way affect the performance of the units and any such variation will diminish over a period of time as the product matures.
Product Evolution	Marshalls reserve the right to amend the technical information as deemed necessary and in accordance with the relevant national and international standards without notice
Contact Us	For technical information on the design, specification and construction when utilising the product, contact Group Technical Services on 0370 411 2233

SPECIFICATION

Approx unit weight (kg)	12
Emission of Asbestos	No content
External Fire Performance	Deemed to satisfy when used for roofing
Reaction to fire	Class A1 when used for internal flooring
Installation	Available on request Keep all units dry before laying & protect incomplete workings during adverse weather or freezing conditions

SUSTAINABILITY

Carbon Footprint	15
------------------	----

SUPPLY

Av. Pack Size m ²	3
Av. pack weight (kg)	267.5

