


Tegula Kerb

Date Created: 21/02/19

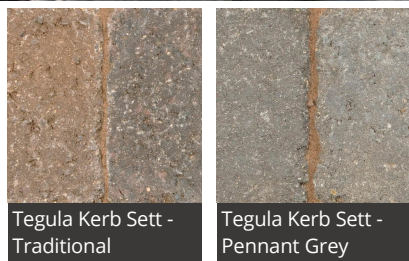

Tegula Kerb Setts provide that finishing touch to complement developments where the kerb is both a functional item and critical design feature. It has a single plan size with 6 variable laying configurations and is often used to create steps and drainage channels in paved areas

DESCRIPTION		
Appearance	Solid unit with distressed surface	
Manufacturing Process	Semi dry pressed & vibrated concrete	
Base Raw Material	Concrete	
Governing Manufacturing Standards	All data where relevant to be established in accordance with BS EN 1338 : 2003	
NBS Specification	Q10 10 Q10 510	Q10 110 Q24 385



Tegula Kerb

Date Created: 21/02/19

PHYSICAL PROPERTIES

Work Dimensions (mm)	250 x 130 x 160 250 x 160 x 130 250 x 160 x 96 160 x 160 x 250
Tolerances on Work Dimensions (mm)	Length ±2mm, width ±2mm, thickness ±3mm
Material Density	2300 kg/m ³ (typically)
Slip/Skid Resistance (polished)	Mean polished skid resistance value (PSRV) : > 45
Slip/Skid Resistance (unpolished)	Mean unpolished skid resistance value (USRV) : > 45.
Thermal Conductivity (K value)	Design data as defined to BS EN 13369 : 2013
Tensile Splitting Strength	Characteristic tensile splitting strength not less than 3.6 MPa. None of the individual results shall be less than 2.9 MPa, nor have a failure load less than 250N/mm of splitting length

SPECIFICATION

Emission of Asbestos	No content
External Fire Performance	Deemed to satisfy. See commission decision 2000/553/ECU
Reaction to fire	Class A1, see commission decision 2000/605/EC

SUSTAINABILITY

Carbon Footprint	14 kg CO2 lin m
------------------	-----------------

SUPPLY

Packaging	All packs are shrinkwrapped onto pallets for fork off-load or crane off-load if necessary
-----------	---

FURTHER INFORMATION

Cleaning & Maintenance	Cleaning & maintenance details are available on request
Efflorescence	Any product containing cement during its early life may exhibit a temporary white discolouration known as efflorescence. This is not a product fault and will gradually disappear with exposure to natural weathering and trafficking
Weathering	It should be appreciated that with all products weathering and site conditions can cause shade variation to appear across the surface of individual units. This does not in any way affect the performance of the units and any such variation will diminish over a period of time as the product matures.
Product Evolution	The evolution of new product design is continuous and information is subject to change without notice. Customers should check with the supplier to ensure that they have the latest details
Contact Us	For technical information on the design, specification and construction when utilising the product, contact the Technical Advisory Services Department on 0370 411 2233

