


Saxon 400 x 400 x 65

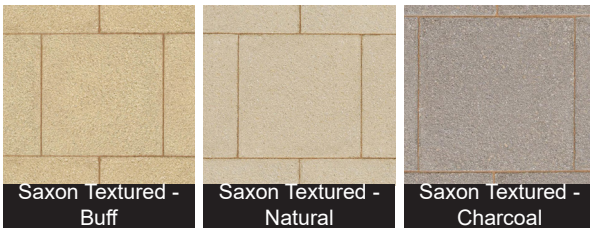

Saxon Textured -
Buff

Saxon Textured -
Natural

Saxon Textured -
Charcoal

Marshall's well-established Saxon textured paving is designed to provide a durable surface finish through its blend of a hard Yorkstone aggregate. The manufacture of the stones, in which Saxon paving is given its finish, means that it delivers both durability and outstanding non-slip properties.

With an extensive range of thicknesses and sizes available, Marshall's Saxon textured paving is suitable for any landscape application, in particular ideal for the residential sector. Trafica formats mean that Saxon paving can be deployed in areas of mixed-use space.

DESCRIPTION	
Appearance	Solid unit with textured surface
Manufacturing Process	Hydraulically pressed concrete
Base Raw Material	Concrete
Governing Manufacturing Standards	All data where relevant to be established in accordance with BS EN 1339 : 2003
UKCA Marking/DOP	www.marshalls.co.uk/declarations
NBS Specification	Q25 315



Saxon 400 x 400 x 65

PHYSICAL PROPERTIES

Work Dimensions (mm)	398 x 398 x 65
Nominal Dimensions (mm)	400 x 400 x 65
Tolerances on Work Dimensions (mm)	Class 2 tolerances to all dimensions as standard, Length ± 2 mm, width ± 2 mm, thickness ± 3 mm
Abrasion Resistance (mm)	≤ 23 mm (Wide Wheel Abrasion Test)
Durability (Freeze-thaw)	≤ 1.0 kg/m ² as a mean with no individual value > 1.5 kg/m ²
Material Density	2300 kg/m ³ (typically)
Slip/Skid Resistance (polished)	Mean polished skid resistance value (PSRV) : > 45
Slip/Skid Resistance (unpolished)	Mean unpolished skid resistance value (USRV) : > 45
Thermal Conductivity (K value)	Design data as defined to BS EN 13369 : 2013
Bending Strength MPa	Characteristic bending strength of 5.0 MPa with no individual result less than 4.0 MPa

SPECIFICATION

Approx unit weight (kg)	25
Emission of Asbestos	No content
External Fire Performance	Deemed to satisfy. See commission decision 2000/553/EUCJ
Reaction to fire	Class A1, see commission decision 2000/605/EC

SUSTAINABILITY

Breeam	These units can achieve an "A" rated system when used in conjunction with the correct sub-base components
Carbon Footprint	22 kg CO ₂ m ²

APPLICATION

Loading Classification	Category 7 - 100 large goods vehicles per week (1.5msa)
------------------------	---

SITE WORKS

Coverage	6.25 no per m ²
----------	----------------------------

SUPPLY

Av. Pack Size m2	4.8
Units Per Pack	30
Av. pack weight (kg)	741

FURTHER INFORMATION

Cleaning & Maintenance	Available on request
Efflorescence	Any product containing cement during its early life may exhibit a temporary white discolouration known as efflorescence. This is not a product fault and will gradually disappear with exposure to natural weathering and trafficking
Weathering	It should be appreciated that with all products weathering and site conditions can cause shade variation to appear across the surface of individual units. This does not in any way affect the performance of the units and any such variation will diminish over a period of time as the product matures.
Product Evolution	The evolution of new product design is continuous and information is subject to change without notice. Customers should check with the supplier to ensure that they have the latest details. Marshall's reserve the right to amend the technical information as deemed necessary and in accordance with the relevant national and international standards without notice
Contact Us	For technical information on the design, specification and construction when utilising the product, contact Group Technical Services on 0370 411 2233

